Wine Cave Technology™
Carefully tailored to mimic the ideal environment of historic wine caves, our exclusive design minimizes temperature fluctuations, reduces vibration, limits light passing through, and locks in humidity.

Precise Preservation
Ingenious features like an Smart Inverter Compressor and metal interior help to keep your collection cool while maintaining the lowest temperature fluctuation among leading brands* and vibration minimized to less than 2 gal (cm/s^2).

Light and Humidity Control
Dark-tinted, triple pane glass protects wine from damaging UV light while humidity control boosts humidity to optimum levels, helping to preserve quality and taste.

Independent Temperature Zones
Three Independent temperature zones keep sparkling, white, and red wines at the right temperature to bring out the very best taste.

Touch Display Lighting
Showcase an entire collection with a touch of the door. LED lights are activated by gently tapping the door or with the mobile app. Choose from four display settings including, Presentation, Upper, Lower, and All.

Signature Fit™ Integrated Design
Every integrated column features an intelligent, symmetrical design that allows for flush installation, along with easy door reversal.

Eco Friendly
Engineered to reduce environmental impact and ENERGY STAR® certified.

Style

Door Style	Panel Ready**
Door Swing	Reversible (Ships Right Hinge)
Interior Cabinet Finish	Metal

Innovation

Wi-Fi Enabled for ThinQ® Control with iPhone / Android App	Yes
Remote Operations	Yes
InstaView® Window (Knock Twice to See Inside)	Yes
Wine Cave Technology™	Yes
Smart Inverter Compressor	Yes

Performance

Temperature Zones	3
Operating Temperatures	41° to 64° F
Humidity Control	Yes
Modes	
Sabbath, Demo, Power On / Off, Temp Control, Smart Diagnosis, Wi-Fi	
High Altitude Compatibility	Yes

Capacity and Storage

Bottle Capacity (750 ml)	113
Storage Shelves	11
Shelf Material	Beech Wood with Metal Accents
Presenter Shelf	2

*When compared to leading brand wine refrigerators of similar size and capacity as of Feb. 2019.
**Shown with professional stainless steel panel and handle accessory kit.

General Features

Digital Touch Controls w/White LED Display	Yes
Hidden LED Interior Lighting	Yes
Presenter Shelf Lighting	Yes
Maximum Sound Level	38 dBA
Star-K Certified Sabbath Mode	Yes
ENERGY STAR® Certified	Yes

Installation Features

Four Point Front Adjustable with 8 Wheels	Yes
Attachment Method to Cabinetry	Top with No Visible Screws
Front Serviceable	Yes
Anti-tip Bracket Included	Yes

Technical Specs

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Length	86 1/2"

Dimensions and Weight

Overall Width (inches)	23 3/4"
Overall Height (inches)	83 1/2" Min. – 84 1/2" Max.
Overall Depth Without Panel or Handles (inches)	23 7/8"
Net Weight (approx.)	357 lbs.
Shipping Weight (approx.)	401 lbs.

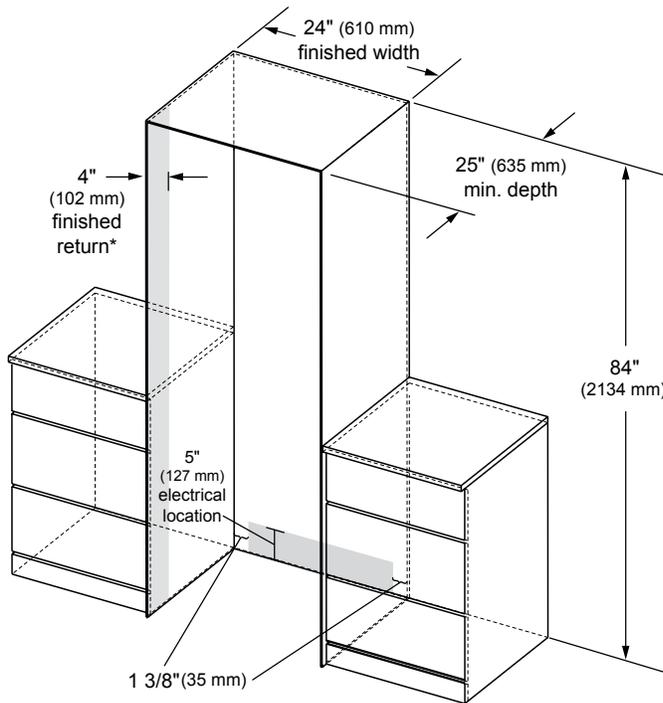## Optional Accessories

Refer to last page for accessories

Warranty Summary*

Limited Warranty, Parts & Labor	3 Years
Limited Warranty, Sealed System and Compressor, Parts & Labor	5 Years
Limited Warranty Compressor, Parts Only	10 Years

*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

Cutout Dimensions – Flush Installation

Single Column

24" (610 mm) finished width

4" (102 mm) finished return*

25" (635 mm) min. depth

84" (2134 mm)

5" (127 mm) electrical location

1 3/8"(35 mm)

*A minimum 4" (102 mm) finished return that matches the cabinet exterior is recommended on all sides and the top of the cutout opening. The shaded area will be visible after installation.

Notes

Wine refrigerator can be installed flush with 3/4" custom panel or optional stainless steel panel kit.

With a 25" (635 mm) cutout depth, the front face of the wine refrigerator fits flush with 25" (635 mm) depth adjacent cabinets.
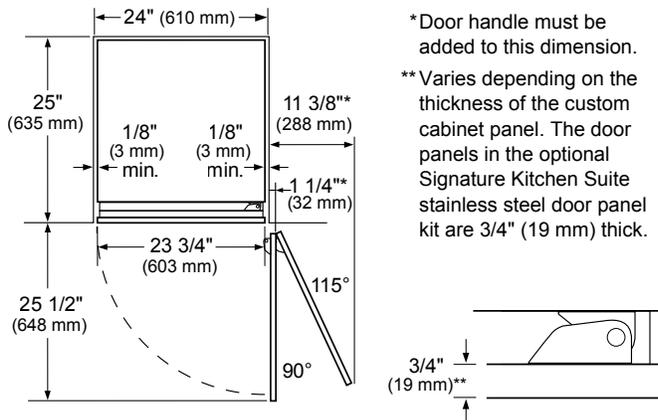
Electrical

A 115V, 60Hz., 15 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall. Electrical must be located on rear wall as shown.

Note: GFI (ground fault interrupter) is not recommended.

Installation Clearances – Flush Installation

Top View

24" (610 mm)

25" (635 mm)

1/8" (3 mm) min.

1/8" (3 mm) min.

11 3/8"* (288 mm)

1 1/4"* (32 mm)

23 3/4" (603 mm)

25 1/2" (648 mm)

115°

90°

3/4" (19 mm)**

*Door handle must be added to this dimension.

**Varies depending on the thickness of the custom cabinet panel. The door panels in the optional Signature Kitchen Suite stainless steel door panel kit are 3/4" (19 mm) thick.
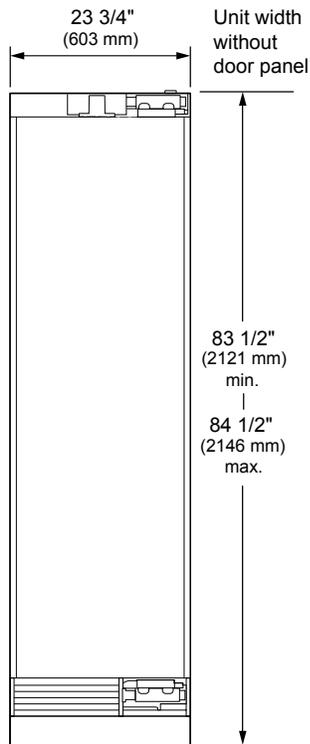
Notes

Door Swing Clearances – The installation must allow for clearances to adjacent walls or cabinets. This wine refrigerator is equipped with a 2-position door stop. The factory-set 115° door swing can be adjusted to 90° if clearance to adjacent cabinets or walls is restricted.
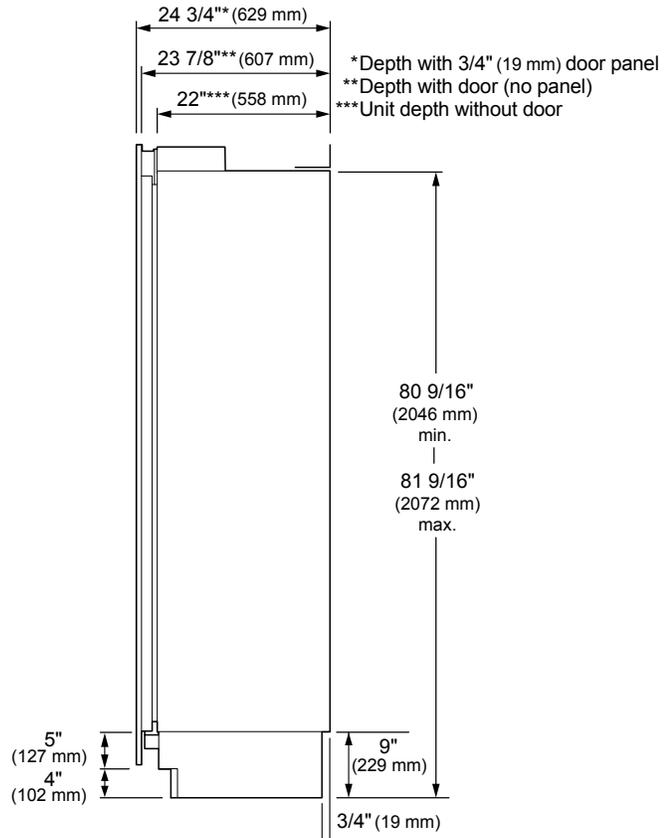
Door Handle Clearances – The Door Handle depth must be added to the dimension noted to determine the total clearances required from adjacent cabinets or walls. This clearance will vary depending on the custom handle used. When using the Stainless Steel Door Panel Kit w/Handle or the Brushed Aluminum Handle (optional accessories), the door handle clearance with door open 115° is 14" (356 mm).
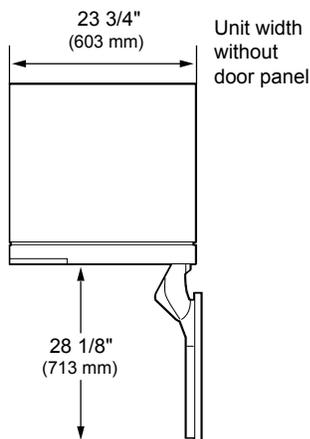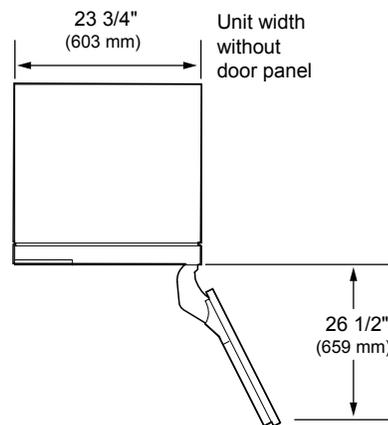
Overall Product Dimensions

Front View

23 3/4"
(603 mm)

Unit width without door panel

83 1/2"
(2121 mm)
min.

84 1/2"
(2146 mm)
max.

Side View

24 3/4"* (629 mm)

23 7/8"*** (607 mm)

22"*** (558 mm)

*Depth with 3/4" (19 mm) door panel
**Depth with door (no panel)
***Unit depth without door

80 9/16"
(2046 mm)
min.

81 9/16"
(2072 mm)
max.

5"
(127 mm)

4"
(102 mm)

9"
(229 mm)

3/4" (19 mm)

Top View

Door Open 90°

23 3/4"
(603 mm)

Unit width without door panel

28 1/8"
(713 mm)

Door Open 115°

23 3/4"
(603 mm)

Unit width without door panel

26 1/2"
(659 mm)

Custom Panel Dimensions

23 3/4"
(603 mm)

7 1/16"
(179.5 mm)

79 7/8"
(2029 mm)

3 3/16"
(81 mm)

3 3/16"
(81 mm)

9 3/8"
(238mm)

4" (102 mm)
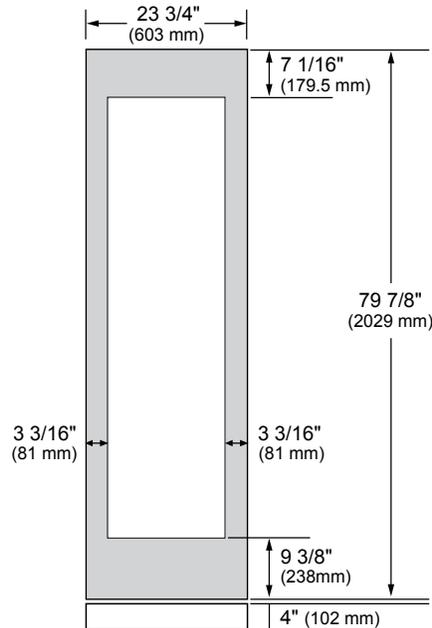
Notes

These units are designed to be customized with decorative panels. Field-installed custom door panels or an optional Stainless Steel Panel Kit is required.

For Custom Panels: Use templates provided with units to pre-drill holes for mounting panel brackets (provided with unit). Adjustment screws and instructions also provided with units.

Maximum Total Door Panel Weights:
24-Inch Integrated Column – 22 lbs.
18-Inch Integrated Column – 21 lbs.

Design Tips

4" (102 mm) will be visible on the interior sides of the furniture return. It is recommended that both sides of each cutout panel be finished to match the cabinet exterior.

If using custom panels, a custom toe kick is required. The bottom of case is unfinished.

Door Handles: Handles are not included with the units. Custom handles are required for installation. Brushed Aluminum Handles are available as an optional accessory.

Optional Accessories
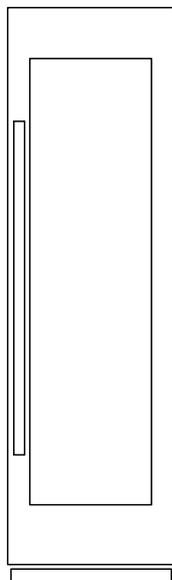
	Professional	Transitional
Stainless Steel Panel / Handle / Toekick Kit		
Right Hinge, Left Handle	SKSWK245RS	SKSWK245RMT
Left hinge, Right Handle	SKSWK245LS	SKSWK245LMT
Joining Kit for Dual Column Installation	SKSFJ800P	
Retrofit Frame Kit	SKSFK800CS	
Brushed Aluminum Handle		
Medium – 31 11/16"	SKSHK310HS	SKSHK310HST
Long – 48" (For Columns)	SKSHK480HS	SKSHK480HST

Refer to the Integrated and Built-in Refrigeration Planning / Installation Guide for details on installing multiple columns, door swing dimensions, cabinet planning, retrofit installation and more.