





Stainless Solid

# **Key Features**

- Makes clear cubes approx. 7/8" W x 7/8" H x 7/8" L
- Produces up to 55 lb of ice per day
- Stores up to 25 lb of ice
- Digital touch pad control with blue LED display
- U-Choose™ feature allows you to select ice fullness
- Silent setting temporarily suspends ice making for 3 hours
- Indicator alert notifies user when cleaning is needed
- Easiest clear ice machine cleaning process in the industry

- Bright white LED lighting
- White interior
- Stainless steel cabinet, toe-kick, and full-wrap door
- Stainless steel handle (7/8" diameter)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs
- Factory installed drain pump model recommended if a gravity drain is not accessible


## **Model Details**


Model	Voltage/Hz	Door Swing	Pump	Finish	Shipping Weight
UOCL115-SS01B	115 / 60	Field Reversible	-	Stainless Solid	96 lb
UOCP115-SS01B	115 / 60	Field Reversible	Pump Included	Stainless Solid	101 lb


#### **Accessories**

Model	Description	Finish	Shipping Weight
ULACLRCLEAN	Clear Ice Machine Cleaner	N/A	1 lb
ULAWATERHOOKUP	Braided Water Supply Line Kit	N/A	2 lb

Front Side Top



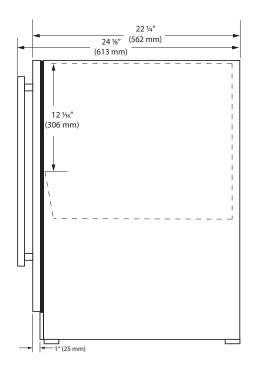


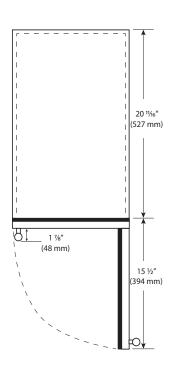


# **Specifications**

Model	OCL115 / OCP115		
Amps: Running	4		
Amps: Ice Harvest	5.5		
Dimensions: Product Depth	22 <sup>1</sup> / <sub>4</sub> " / 562 mm		
Dimensions: Product Height	33 <sup>11</sup> / <sub>16</sub> " to 34 <sup>1</sup> / <sub>8</sub> " / 855 mm to 881 mm		
Dimensions: Product Width	14 <sup>15</sup> / <sub>16</sub> " / 379 mm		
ENERGY STAR	N/A		
Ice Production Per Day	55 lb		
Ice Storage	25 lb		
Product Weight: Max	101 lb		
Refrigerant Type	R600a		
Sabbath (Star K Certified)	Yes		

#### **Back**



### **Cabinet Cut-Out**



### **Warranty**

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



#### **Installation Notes**

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow





