

Incognito Island Ventilation Hood

DA 6596 D



Incognito Island Ventilation Hood

DA 6596 D



FEATURES

- NEW: LED ClearView lighting
- NEW: Con@ctivity — communication between hood and cooktop
- NEW: Telescopic chimney
- NEW: Recirculating as option
- Front-mounted backlit controls
- Four fan speeds (incl. intensive)
- Removable, dishwasher-safe stainless steel grease filter
- Choose from glass or stainless steel panels* for covering the stainless steel grease filter (**sold separately**); dishwasher safe for easy clean-up
- Three dishwasher-safe panels
- Filter saturation indicator
- Delayed shutdown for 5 or 15 minutes
- Automatic shutdown of intensive level, programmable for 10 minutes
- Polished stainless steel logo
- Stainless steel finish or RAL color options

SPECIFICATIONS

DA 6596 D — Item 28659655USA

Vented or Recirculating	625 CFM setting
Canopy Dimensions	35 ³ / ₈ " (898mm) W x 2 ³ / ₄ " (70mm) H x 23 ⁹ / ₁₆ " (598mm) D
Dimensions (Standard Height) - Vented	27 ³ / ₁₆ " — 39" (690—990mm) H
Dimensions (Standard Height) - Recirculating	29 ¹ / ₂ " — 41 ³ / ₄ " (750—1060mm) H
Chimney Dimensions	12" (305mm) W x 11 ⁵ / ₈ " (295mm) D
Minimum distance above cooktop	Please refer to page 26 of the installation manual
Color	Available in brushed stainless steel or RAL colors

Electrical

Electrical Requirements	120 V, 60 Hz, 15 Amps
Electrical Rating	362 W (Blower: 350 W; Lighting: 4x3 W)

Optional Accessories

Recirculating Kit	DUI 32 Recirculating Kit
OdorFree Charcoal Filter	DKF 12-1 OdorFree Charcoal Filter
Reducing Collar (air flow max. 400 CFM)	


Shipping

Shipping Weight	74.8 lbs (34kg)
-----------------	-----------------

Support

Call	800.843.7231
20/20	2020technologies.com

PRODUCT VIEW

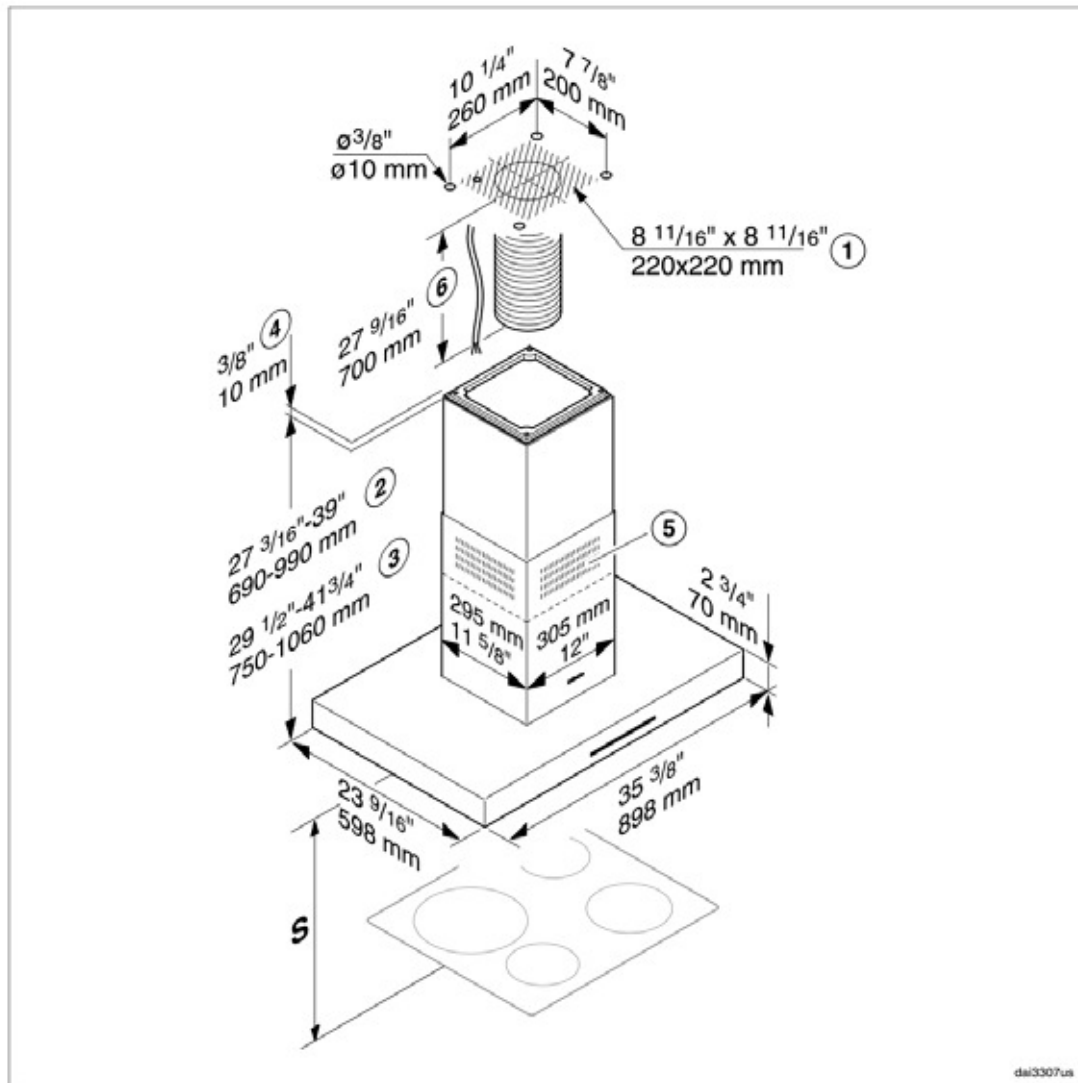

- ① Mounting area for the exhaust ducting and power cable. In recirculation mode, only the power cord is required.
- ② Possible height range for appliance in vented mode
- ③ Possible height range for appliance in recirculation mode
- ④ Alternative installation with spacer frame
- ⑤ Air vent positioned at the top for recirculation