Under-Counter Trash Compactor

E15TC75HPS professional series





Extra-Large Capacity Up to 1.55 cubic feet.



3/4 HP Motor

With 3,000 lbs. of compacting pressure, this 3/4 hp motor will neatly compress an entire bin in just 45 seconds. One compacted bag equals six 13-gallon trash bags, keeping our environment in



Deodorizing System

Keeps your kitchen smelling fresh and clean with a disk that protects up to six months and alerts you via the control panel when it's time to replace.



Easy to Clean and Access


Smooth-Glide™ trash basket fully extends to provide easy access to the interior for convenient use and cleaning.

Installation Type	Built In/Freestanding
FEATURES	
Stainless Steel Exterior/Interior	Yes
Control Panel	4 Button
Trash Compartment Capacity (Cu. Ft.)	1.55
Compacting Force (Lbs.)	3,000
Belt-Drive, Dual-Screw Scissor System (HP)	3/4
Smooth-Glide™ Full-Extension Drawer Glides	Yes
Deodorizing System	Yes
UltraQuiet™ Sound Reduction (Approx. dBA)	62
Electronic Control with Clock and Countdown Timer	Yes
On/Off Key Switch	Yes
Trash Bag Storage Compartment	Yes
ADDITIONAL FEATURES	
Outer Door	Stainless Steel
Fully Enclosed Inner Cabinet	Yes
Trash Removal Drop-Down Panel	Yes
Field-Reversible Door	Yes
Self-Closing Door Mechanism	Yes
ACCESSORIES	
Deodorizing System Replacement Disk – ETC15ODH	Optional
Replacement Bags (5 Dozen) – ETC15CB5DH	Optional
Toe Kick Accessory Kit (for Freestanding Installation) – ETC15TKH	Optional
SPECIFICATIONS	
Overall Exterior Dimensions –	
Height (Adjustable)	34-3/8" - 35-3/8"
Width	14-7/8"
Depth (Including Door) (with 90° Door Open)	21-1/2" 35-7/8"
Power Cord Location	Top Right Rear
Leveling Legs	Yes
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts [‡]	0.15
Approved for Under-Counter Installation	Yes
Product Weight	161 Lbs.

*For conversion from built-in installation to freestanding, use optional Toe Kick Accessory Kit.

‡ For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation. NOTE: Always consult local and/or national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.com.

Specifications subject to change.

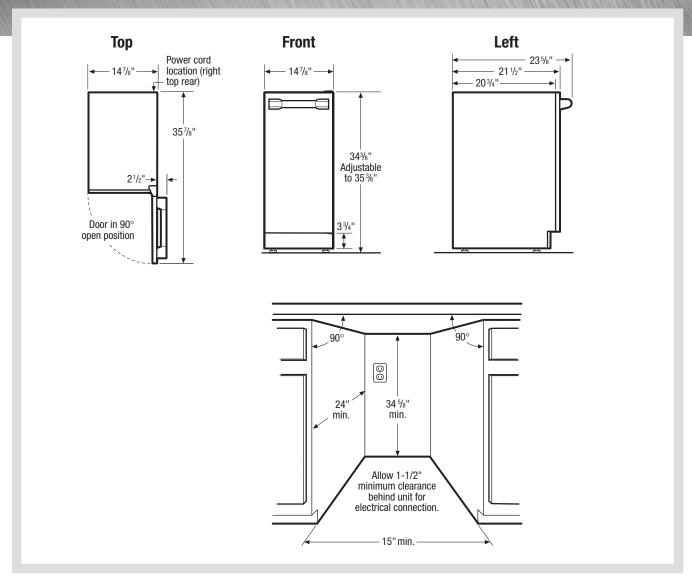

Under-Counter Trash Compactor Specifications

- Product Weight 161 Lbs.
- Voltage Rating -120V/60Hz/15 Amps
- Connected Load (kW Rating) @120 Volts = 0.15kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 5.5 Amps
- Electrical cable supplied.
- Always consult local and/or national electric & plumbing codes.
- Can be used freestanding, or built in under counter. (For conversion from built-in installation to freestanding, use optional Toe Kick Accessory Kit ETC15TKH).
- Does not require additional airspace for top, sides or rear when used in built-in application. Increase unit dimensions by at least 1/4" for recommended rough opening, allowing 1-1/2" minimum clearance in rear for electrical connection.

- Unit MUST be level for proper operation, and positioned on flat surface, capable of supporting entire weight.
- · Leveling legs supplied to adjust height and level unit.
- Must be positioned to allow for 90° door swing. (Door is field reversible for right- or left-hand opening.)
- When installing next to wall where handle may make contact, allow 3" clearance between opened door and wall.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.

Optional Accessories

- Deodorizing System Replacement Disk (ETC150DH).
- Replacement Bags (5 Dozen) (ETC15CB5DH).
- Toe Kick Accessory Kit (for Freestanding Installation) (ETC15TKH).

Electrolux Major Appliances, N.A.