

MODEL D5636XXLHS/PH



FEATURES

Pro handle and hidden controls

TouchProof™ stainless steel

Turbo Drying™ system

16 place-setting capacity

Quiet operation - 46 dB(A)

 $9 \mbox{Spray}^{\mbox{\tiny TM}}$ wash system; separate spray nozzles clean pot & pans and continuously spray cutlery basket

10 wash programs

Delayed start-up to 24 hours

Heavy-duty stainless steel construction with nylon-coated steel racks

LED display

Remaining time and program end indicator



INTERIOR FEATURES

- Top tray with Instant Lift™
- Premium upper rack
- Premium lower rack

PROGRAMS

- Sanitation Wash
- Normal Wash
- Heavy Wash
- Quick Wash
- Hygiene
- Delicate Wash
- Eco Wash
- Upper Half
- Lower Half
- Rinse and Hold





PRODUCT SPECIFICATIONS

Model		D5636XXLHS/PH
Width		23 ⁷ /8"
Height		34"- 35 ³ /4"
Depth		22 ⁷ /8"
Door Clearance		24 ⁵ /8"
Weight		115 lb
Max Loading Height Upper Rack		9"
Max Loading Height Lower Rack		13 ⁷ /8"
Electrical Supply		115 VAC, 60 Hz
Electrical Service		15 amp circuit
Plumbing Supply	¹ / ₄ " OD copp	er, braided stainless steel or PEX tubing
Pressure		4.2-140 psi


Electrical supply, plumbing supply and drain should be located in an adjacent cabinet. If not, they must be located within the shaded area shown in the illustrations below.

ELECTRICAL | PLUMBING






DIMENSIONS

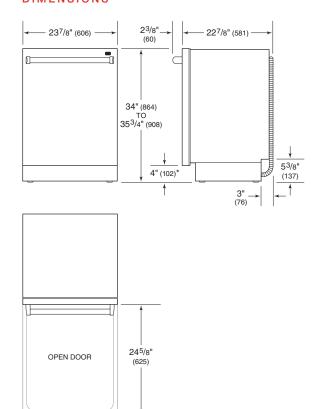

^{*}Dimension will vary with product height.

INSTALLATION

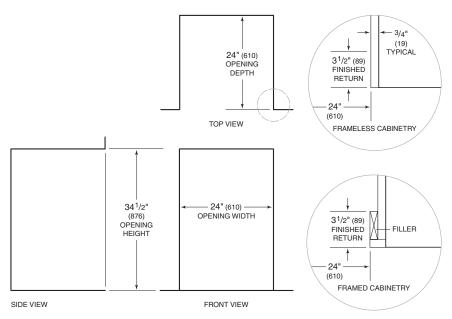

NOTE: 3¹/2" (89) finished returns will be visible and should be finished to match cabinetry.