



Top Mount Refrigerator

FPUI2188PF

21 Cu. Ft. Top Mount




Signature Features



SpaceWise® Organization System

Our SpaceWise® Organization System makes it easy to keep food organized and easy to find when you need it.

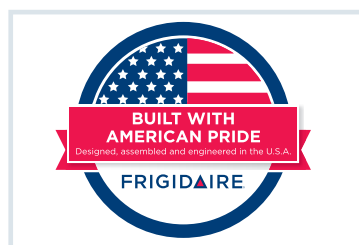


Built with American Pride

Appliances that are high-performing, more accessible, and more innovative than ever — designed, built, and engineered in the U.S.A.



Humidity-Controlled Crisper Drawers

Keep your fruits and vegetables fresh in our humidity-controlled crisper drawers.

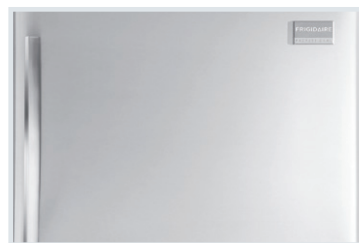

Smudge-Proof™ Stainless Steel

Reduces fingerprints and smudges so it's easy to clean.

Product Dimensions

| | |
|--|---------|
| Height (Including Hinges & Rollers) | 69-3/8" |
| Width | 30" |
| Depth (Including Door) | 32" |

More Easy-To-Use Features

Bright Lighting

Our bright lighting makes it easy to see what's inside.

SpillSafe® Shelves

Designed to keep spills contained, making cleanup a breeze.

Cool Zone™ Drawer

Conveniently located in the fresh food compartment for easy access to sandwich foods.

Reversible Door

Door can be installed to open left or right based on your needs.

Quick Find Door Bin

Store your most-used items in one convenient location. Removable design allows you to carry it to the table at mealtimes, making cleanup a breeze.

Clear Dairy Door

ENERGY STAR® Most Efficient¹

Available in:




Stainless
(F)

¹Recognized as the Most Efficient of ENERGY STAR® in 2014.

| Features | |
|---|---|
| Door Design | UltraSoft™ |
| Door Handle Design | Stainless Steel |
| Cabinet Finish (Textured) | Grey |
| Door Stops | Yes |
| Door Hinge Covers | Grey |
| Door Reverse Option | Yes |
| Rollers - Front/Rear | Adjustable/Yes |
| Sound Package | Quiet Pack |
| Toe Grille | Grey |
| Refrigerator Features | |
| Interior Lighting | Bright |
| Refrigerator Shelves | 3 Sliding and 1 Fixed SpillSafe® Adjustable Glass |
| Cool Zone™ Drawer | Clear |
| Wine/Can Rack | White |
| Store-More™ Crisper Drawers | 2 Clear |
| Humidity Controls | 2 |
| Dairy Compartment | Clear Dairy Door |
| Door Bins | 1 Quick-Find, 3 Adj. Half-Width Clear, 1 Fixed Full-Width White |
| Door Racks | 1 Fixed Full-Width White |
| Non-Slip Bin Liner | 2 |
| Tall Bottle Retainers | |
| Gallon Door Storage | 3 |
| Freezer Features | |
| Door Bins | 1 Soft Freeze™ Zone |
| Door Racks | 1 Full-Width White |
| Freezer Shelves | 1 Full-Width Glass w/ Sliding Wire Under-Basket |
| Factory Ice Maker w/ Large Ice Bin | Included (PN# IM115) |
| Lighting | Yes |
| Certifications | |
| ENERGY STAR® Most Efficient ¹ | Yes |
| Specifications | |
| Total Capacity (Cu. Ft.) | 20.6 |
| Refrigerator Capacity (Cu. Ft.) | 15.3 |
| Freezer Capacity (Cu. Ft.) | 5.3 |
| Power Supply Connection Location | Right Bottom Rear |
| Water Inlet Connection Location | Bottom Right |
| Voltage Rating | 120V / 60Hz / 15A |
| Connected Load (kW Rating) @ 120 Volts ² | 0.72 |
| Amps @ 120 Volts | 6.0 |
| Minimum Circuit Required (Amps) | 15 |
| Shipping Weight (Approx.) | 220 Lbs. |

¹Recognized as the Most Efficient of ENERGY STAR® in 2014.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

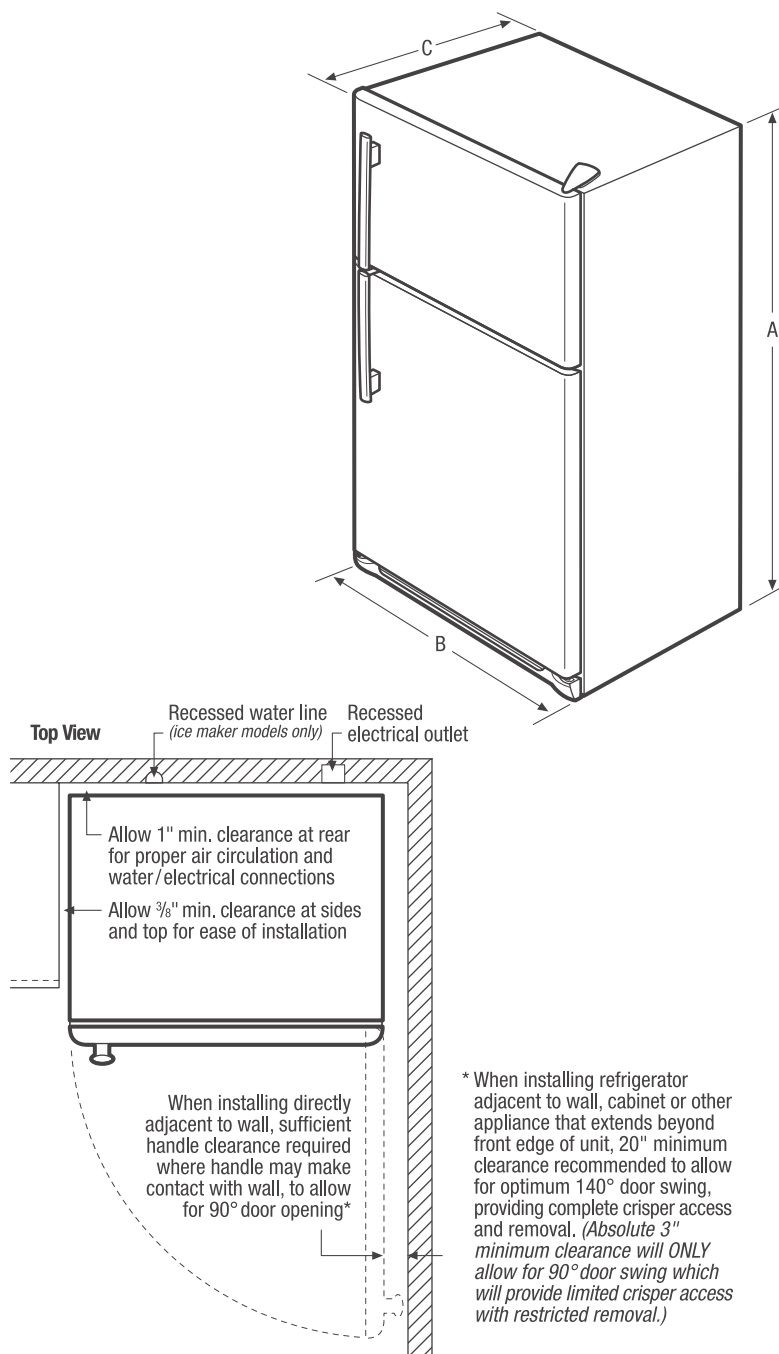


NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.




| Product Dimensions | |
|-------------------------------------|---------|
| A - Height (Incl. Hinges & Rollers) | 69-3/8" |
| B - Width | 30" |
| C - Depth (Incl. Door) | 32" |
| Depth with Door Open 90° | 60" |

Accessories information available on the web at frigidaire.com

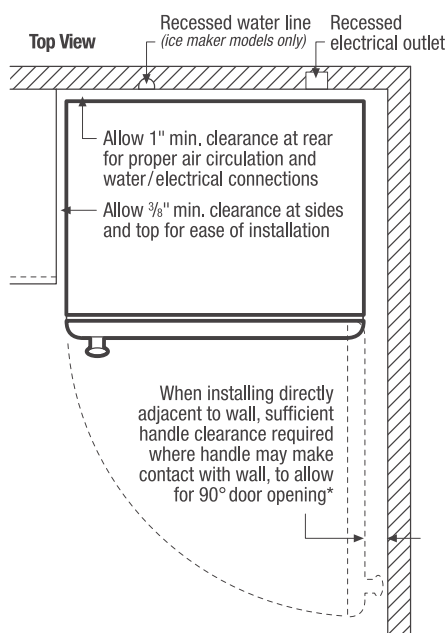

* When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)

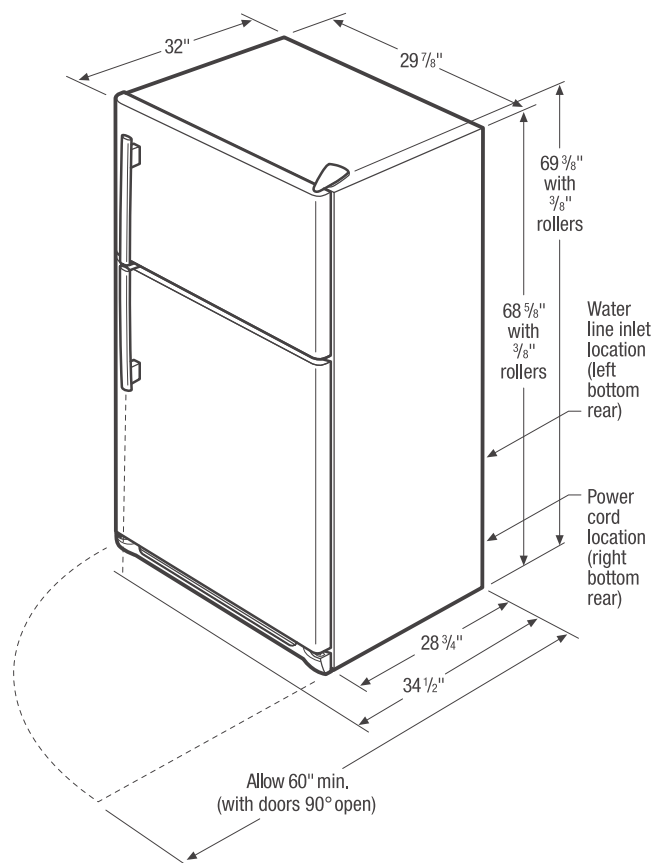


Top Mount Refrigerator Specifications

- Product Shipping Weight (approx.) - 220 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating - 120V / 60 Hz / 15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.72kW
- Amps @ 120 Volts = 6.0 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- Minimum 3/8" clearance required for sides and top of refrigerator with 1" clearance at rear to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)
- To ensure optimum performance, do not install in areas where temperature drops below 55°F or rises above 110°F and avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure - Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

Use these dimensions and clearance instructions for planning purposes only. For detailed installation instructions, refer to installation guide, packed with product, or on the web at frigidaire.com.


Front

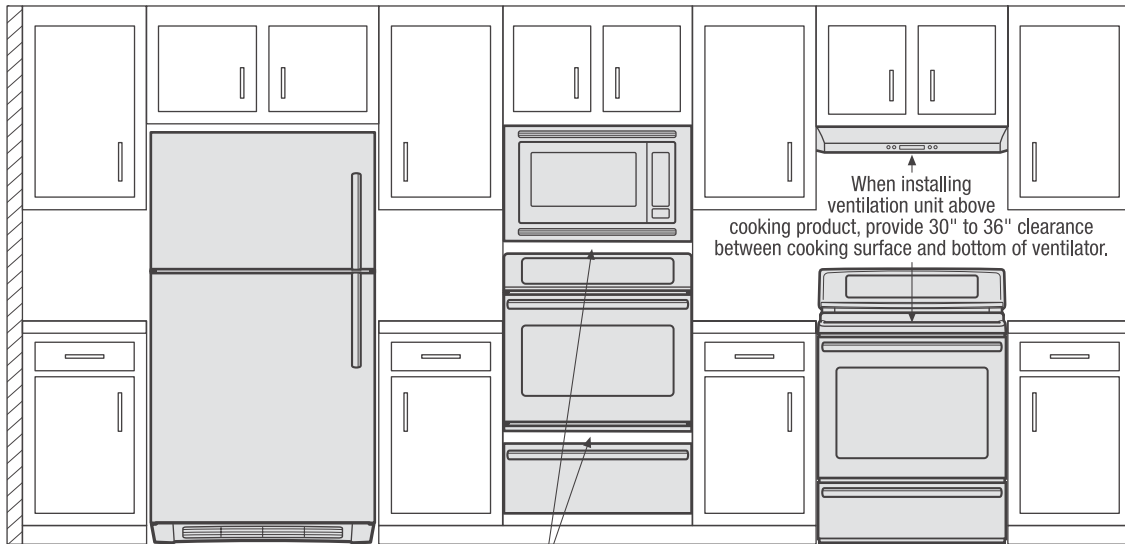

When installing built-in cooking appliances in combination, 2"-high minimum visible gap between appliance faceplates required.

Clearance information for cooking appliances, provided in specific product's installation guide.


Top

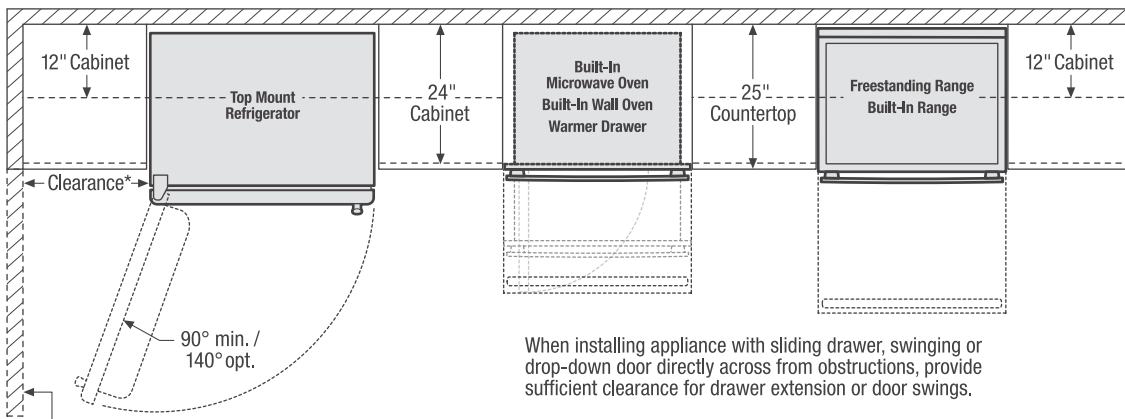

*When installing top mount refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)

When installing appliance with sliding drawer, swinging or drop-down door directly across from obstructions, provide sufficient clearance for drawer extension or door swings.

Top

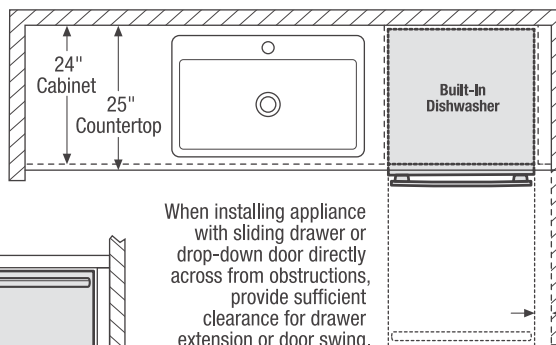

When installing appliance with sliding drawer or drop-down door directly across from obstructions, provide sufficient clearance for drawer extension or door swing.

When installing appliance with sliding drawer or drop-down door adjacent to wall, cabinet, or other obstruction that extends beyond front edge of appliance, allow 2" minimum clearance between drawer or door and obstruction.

Front

