
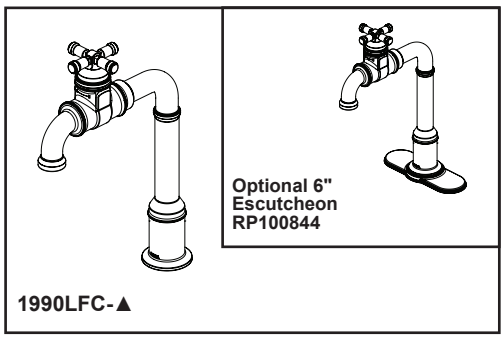


see what Delta can do℠

BAR & PREP SINK FAUCET

- Broderick® Collection
- Single Handle Deck Mount

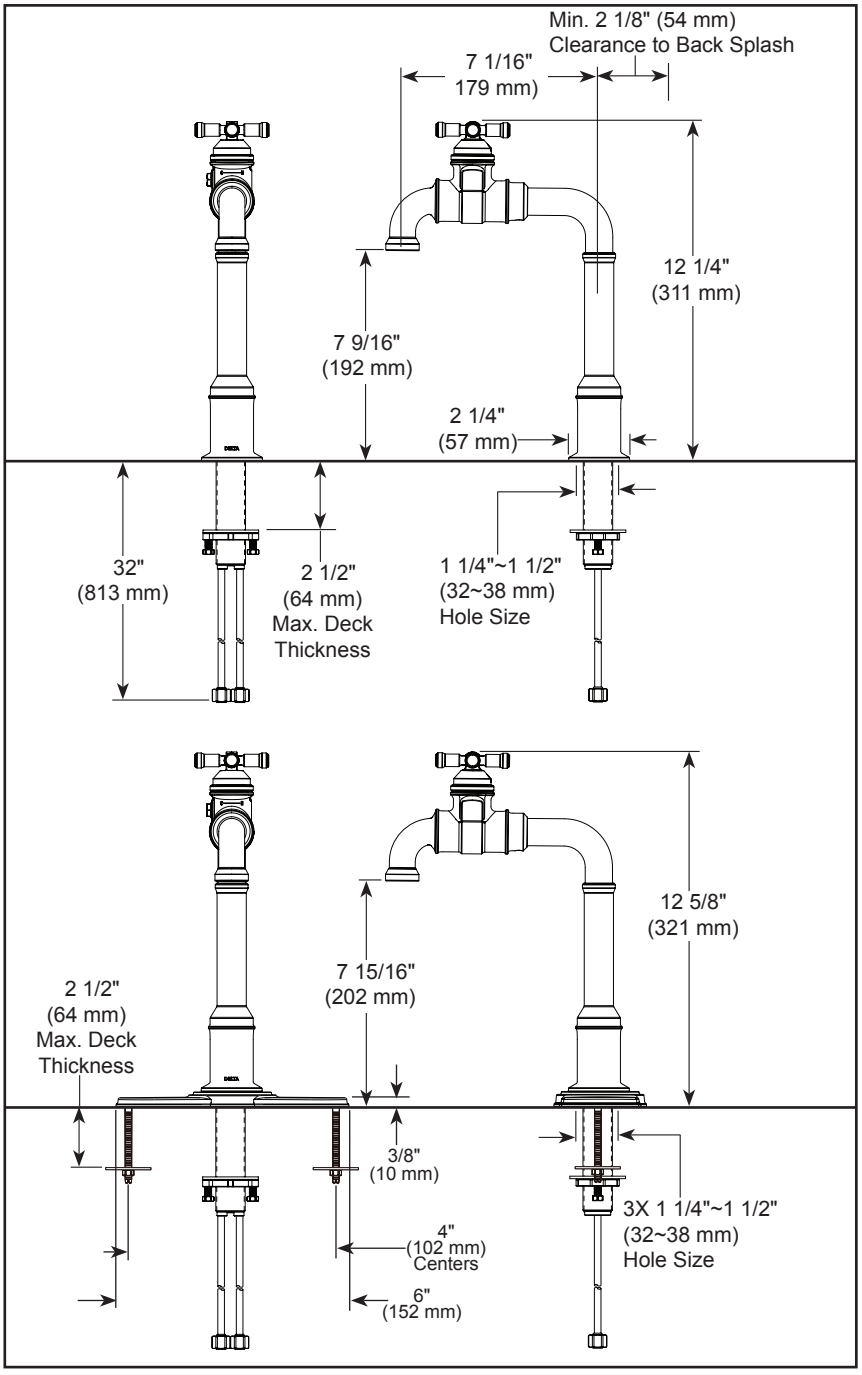

▲ Designate proper finish suffix

STANDARD SPECIFICATIONS:

- Max flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Solid brass fabricated body
- H-C indicator markings
- Ceramic disc cartridge
- Valve rotates counterclockwise and cycles from off to cold with volume control cold only, then full flow to mix and hot positions
- One or three hole mount (6" escutcheon optional, not included)
- Order RP100632 for coordinating soap dispenser

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.


COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- ♿ ICC/ANSI A117.1

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-K-1990LFC Rev. D

Delta Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company

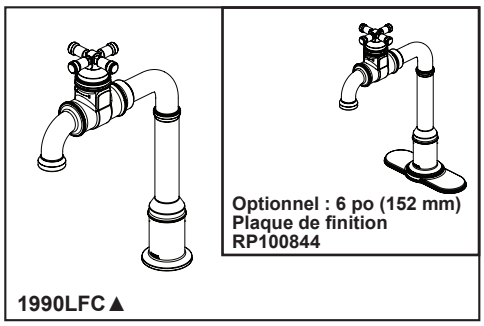

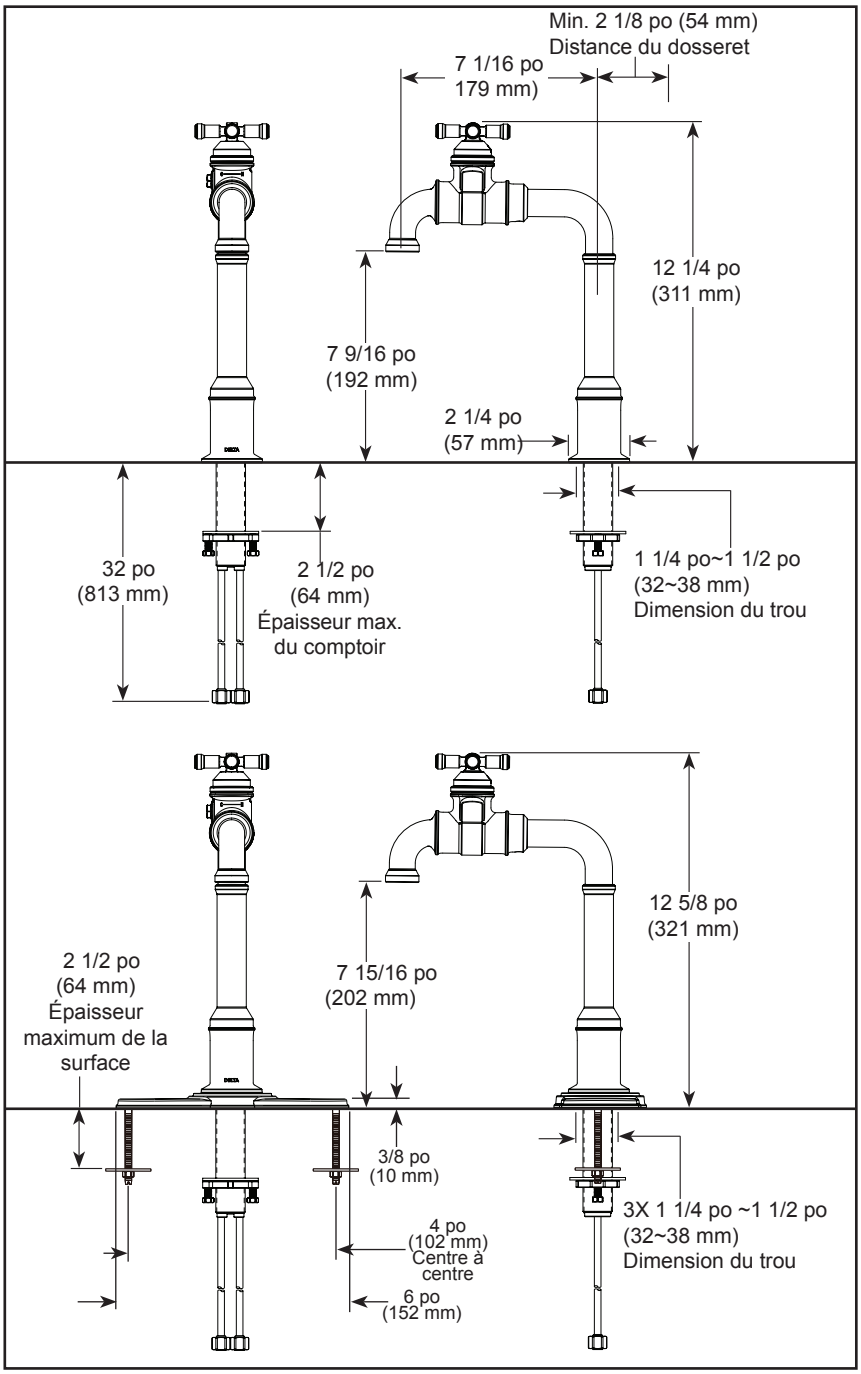

▲ Désigner le suffixe de finition approprié

Delta se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.deltafaucet.ca pour la disponibilité des produits et des options.

DSP-K-1990LFC Rév. D

DELTA

voyez ce que Delta peut faire℠

ROBINET DE BAR ET D'ÉVIER DE PRÉPARATION

- Collection Broderick℠
- Poignée unique, installation sur le comptoir

SPÉCIFICATIONS STANDARDS :

- Débit maximal 1,5 gal./min à 60 psi, 5,7 L/min à 414 kPa
- Corps fabriqué de laiton massif
- Indicateurs C-F
- Cartouche à disque en céramique
- La soupape tourne dans le sens antihoraire, faisant passer le mitigeur d'une température complètement froide, à mixte, puis à complètement chaude.
- Installation à un ou trois trous (plaque de finition de 6 po / 152 mm en option, non incluse)
- Commander RP100632 pour le distributeur de savon assorti

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter le site fr.deltafaucet.ca pour tous les détails de notre garantie limitée.

CONFORME À :

- ASME A112.18.1 / CSA B125.1
- ICC / ANSI A117.1

Delta Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company