



Quick release stainless steel with mesh, dishwasher-safe filters.

Heat Sentry™ detects excessive heat and adjusts speed to high automatically.

Works with optional Universal Make-Up Air Dampers.

CFM Reducer Kit for internal blower reduces max CFM to 250–300.

Model Numbers:

IS23BL

IS23SS

IS23WH



Simple push-button controls enable three blower speed settings.



Fluorescent lamps flood the cooking surface with even lighting.



Hood Sizes

Width 35-7/16"

Depth 23-5/8"

Finish

Stocked Brushed Professional Grade (IS2304) or Standard Stainless Steel (IS23)

IS23 Special Order Powdercoat Black, Powdercoat White

Features

Lighting Type Fluorescent 9W G23 Base

Number of Lamps 2

Lighting Levels 1

Lighting Lamps Included Yes

Control Type 3-speed, Pushbutton

Control Features Heat Sentry™

Remote Control Not Available

Filter Type Stainless Steel with Mesh Grease Filter

Non-ducted Capability Yes

Hood Blower Included (IS23)


Internal	
Blower CFM	500
Sones	8.5

Accessories

10' Stainless Flue Extension	FEXTIS23SS
10' Black Flue Extension	FEXTIS23BL
10' White Flue Extension	FEXTIS23WH
Non-ducted Recirculating Kit	ROUNDFILTER
CFM Reducer Kit	ARP6
Universal MUA Damper	MD6TU, MD8TU, MD10TU

Installation Requirements

Amps @ 120V	3.1
Electrical	Direct Wire
Duct Size: Internal Blower	6"
Duct Direction	Vertical
Backdraft Damper	Included

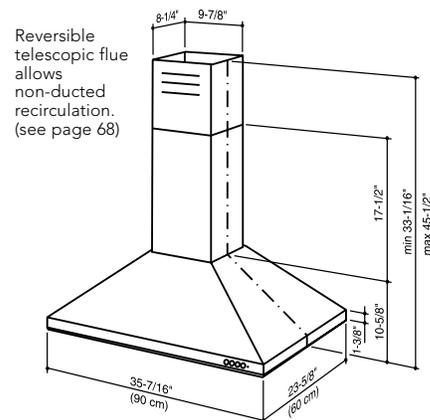

Reversible telescopic flue allows non-ducted recirculation. (see page 68)

Installation height above the cooking surface:

- 8' ceiling: 24"
- 9' ceiling: 25"–30"
- 10' ceiling: 27"–30"

Telescopic flue for 8'–9' ceiling is standard. Optional flue extensions for 10' ceiling

For more details see the product specifications sheet found at www.BESTRangeHoods.com