

FRIGIDAIRE GALLERY®

FGSS2335TF

SIDE-BY-SIDE REFRIGERATOR

22.2 CU. FT. STANDARD-DEPTH

Smudge-Proof™
Stainless Steel



**AVAILABLE
COLORS**



PRODUCT DIMENSIONS

| | |
|-------------------------------------|---------|
| Height (Including Hinges & Rollers) | 69-7/8" |
| Width (Doors) | 33" |
| Depth (Including Door) | 33-1/8" |

MORE EASY-TO-USE FEATURES

PureAir Ultra® Filters

Keeps the air cleaner and fresher.

Store-More™ Humidity-Controlled Crisper Drawers

Keep your fruits and vegetables fresh in our humidity-controlled crisper drawers.

Store-More™ Gallon Door Bins

Door storage gives you room for larger items — like a gallon of milk.

Store-More™ Glass Shelves with Metallic Trim

More space to store your food with edge-to-edge shelves.

Multi-Level LED Lighting

Corner-to-corner LED lighting throughout the refrigerator for better visibility.

Store-More™ Capacity

Our large capacity refrigerator gives you room to store more.

Full-Width Freezer Shelf

Gives you more usable space to organize and store more.

CERTIFICATIONS

A.D.A.- Compliant

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.



Star-K® Certified (Sabbath Mode)

SIGNATURE FEATURES



Chill Drawer

Cold air from the freezer is used to quickly cool food and drinks. Includes temperature control settings.



Adjustable Interior Storage

Over 100 ways to organize and customize your refrigerator. Details vary by model.



Smudge-Proof™ Stainless Steel

Resists fingerprints and cleans easily.



PureSource Ultra® II Ice & Water Filtration

Discover how our genuine filtration works to keep your water cleaner. PureSource Ultra® II Water Filters remove 99.3% of lead and 99.9% of cysts from your household water.

FGSS2335TF SIDE-BY-SIDE REFRIGERATOR

22.2 CU. FT. STANDARD-DEPTH

FRIGIDAIRE
GALLERY

FEATURES

| | |
|------------------------------|-----------------|
| Door Design | Tall Curved |
| Door Handle Design | Stainless Steel |
| Cabinet Finish | Grey |
| Door Stops/Door Closers | Yes/Yes |
| Door Hinge Covers | Hidden |
| Rollers - Front/Rear | Adjustable/Yes |
| Energy Saver Plus Technology | |
| Water Filter Location | Top Right Rear |
| Sound Package | |

DISPENSER

| | |
|-------------------------------------|----------------------|
| Controls | Express-Select® |
| Dispenser Design | Flush, Single Paddle |
| Number of Dispenser Buttons | 11 |
| Crushed Ice/Cube Ice/Water | Yes/Yes/Yes |
| Ice Option | |
| Freeze Option | |
| Display On/Off Option | Yes |
| Control Lock/Light | Yes/Yes |
| Temp/Door Ajar/Power Failure Alerts | Yes/No/Yes |
| Water Filter Change Indicator Light | Yes |
| Air Filter Change Indicator Light | Yes |

REFRIGERATOR FEATURES

| | |
|-------------------------------------|---|
| Interior Lighting | Designer LED |
| Water Filter Type | PureSource Ultra® II |
| Air Filter Type | PureAir Ultra® |
| Fixed Shelves | 3 Store-More™ Glass |
| Sliding Shelves | |
| Chill Drawer | 1 Stacked |
| Wine/Can Rack | |
| Upper Crisper/Lower Crisper | 1 Clear/1 Clear |
| Humidity Controls | 2 |
| Dairy Compartment | 1 Clear |
| Door Bins | 2 One-Gallon Clear & 2 Two-Liter Clear |
| Non-Slip Bin Liner/Bottle Retainers | |
| Condiment Bin | |

FREEZER FEATURES

| | |
|-----------------------------------|------------------------|
| Door Bins/Tilt-Out Wire Door Bins | 4 Clear/No |
| Fixed Shelves | 2 Wire |
| Full Extension Baskets | |
| Full Freezer Baskets | 1 White Plastic/1 Wire |
| Half Freezer Baskets | |
| Ice Cream Shelf/Pizza Shelf | Yes/Yes |
| SpaceSaver™ Shelf | |
| Lighting | LED |

CERTIFICATIONS

| | |
|----------------------------------|-----|
| A.D.A. Compliant ¹ | Yes |
| Star-K® Certified (Sabbath Mode) | Yes |

SPECIFICATIONS


| | |
|---|-------------------|
| Total Capacity (Cu. Ft.) | 22.2 |
| Refrigerator Capacity (Cu. Ft.) | 14.3 |
| Freezer Capacity (Cu. Ft.) | 7.9 |
| Power Supply Connection Location | Right Bottom Rear |
| Water Inlet Connection Location | Left Bottom Rear |
| Voltage Rating | 120V/60Hz |
| Connected Load (kW Rating) @ 120 Volts ² | 1.02 |
| Amps @ 120 Volts | 8.5 |
| Minimum Circuit Required (Amps) | 15 |
| Shipping Weight (Approx.) | 325 Lbs. |

¹When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

PRODUCT DIMENSIONS

| | |
|---|---------------|
| A - Height (Including Hinges & Rollers) | 69-7/8" |
| B - Cabinet Width/Door Width | 32-7/8" / 33" |
| C - Depth (Including Door) | 33-1/8" |
| Depth with Door Open 90° | 48" |

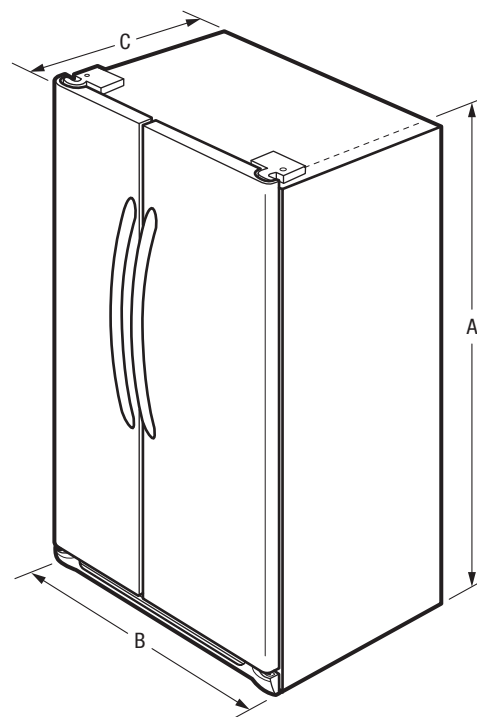

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.
Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca



FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGSS2335T 04/18
© 2018 Electrolux Home Products, Inc.

FGSS2335TF SIDE-BY-SIDE REFRIGERATOR

22.2 CU. FT. STANDARD-DEPTH

FRIGIDAIRE
GALLERY

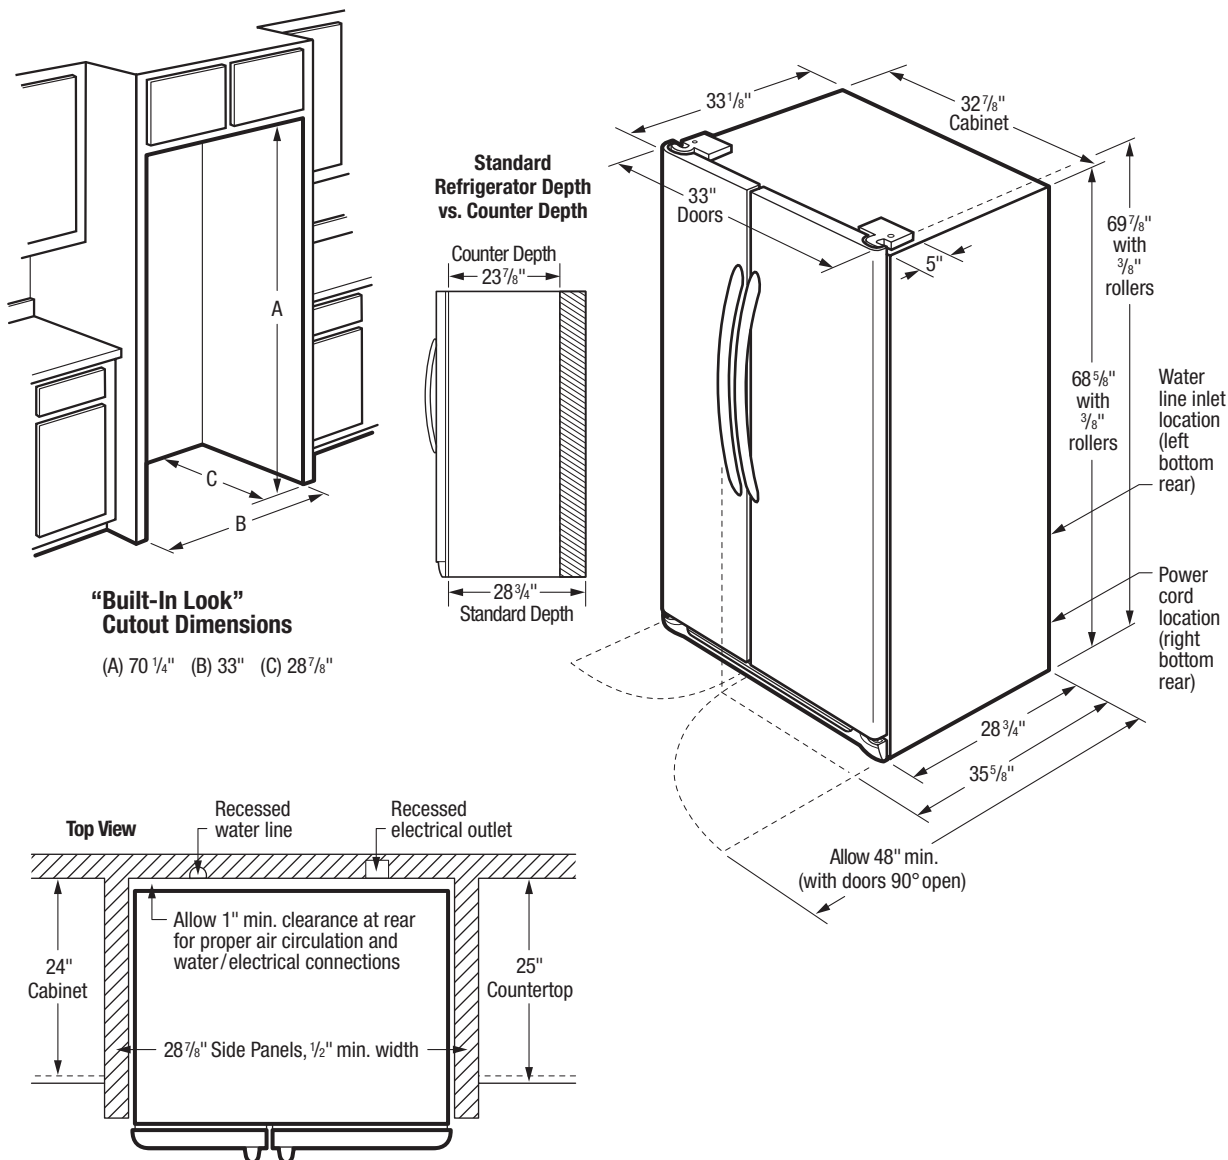

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) – 325 Lbs.
- Voltage Rating – 120V/60 Hz
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (*Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.*)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure – Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

"BUILT-IN LOOK" SPECIFICATIONS

- Minimum opening of 70-1/4"H x 33"W x 28-7/8"D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FGSS2335T 04/18

© 2018 Electrolux Home Products, Inc.