

## Refrigeration Equipment Reach-In Freezer, 2 Doors, 49 cu.ft - Stainless Steel (R290)

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



**738245 (KCHRI54R2DFE)**

2-door reach-in freezer,  
stainless steel, 54 cubic feet,  
R290 refrigerant gas, -9°F -  
Energy Star

### Short Form Specification

**Item No.** \_\_\_\_\_

2 full doors freezer with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel.

Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Interior LED light to save energy and for best internal visibility.



### Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Optional Accessories

- shelf for 54" and 81" (left/right) reach-in PNC 880591 ☐
- shelf clips PNC 880611 ☐

APPROVAL: \_\_\_\_\_

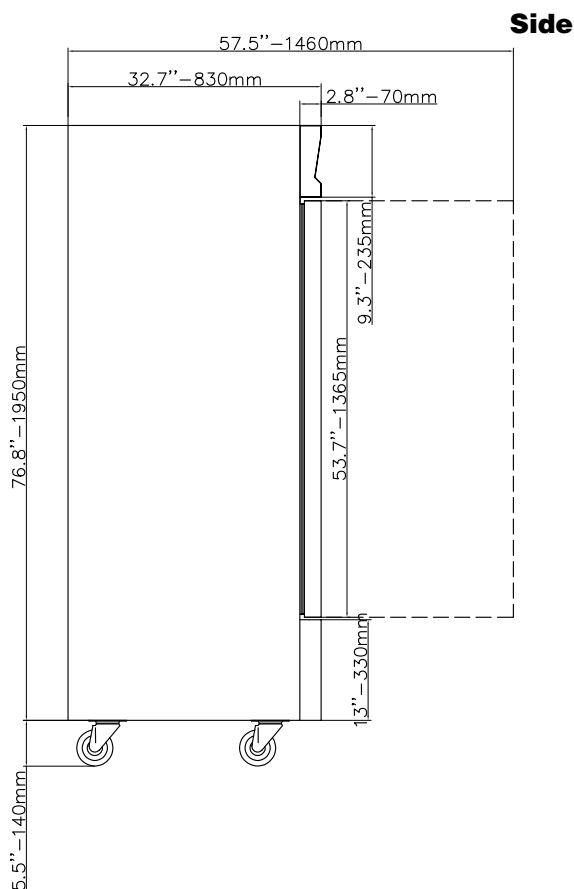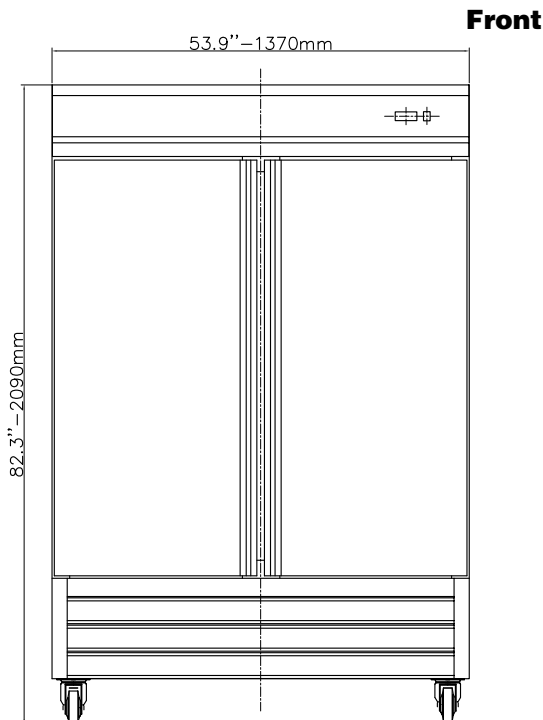

EI = Electrical connection

### Electric

Supply voltage:	
738245 (KCHRI54R2DFE)	115 V/1 ph/60 Hz
Electrical power, max:	0.9 kW
Current consumption:	9 Amps
Plug type:	USA NEMA 5-15P

### Key Information:

Capacity (Cu. Ft.)	49
Door hinges:	1 Left+1 Right
External dimensions, Width:	53 15/16" (1370 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, Height:	82 1/4" (2090 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	27 1/16"
Internal Dimensions (height):	60 1/4"
Internal Dimensions (width):	49 7/16"
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	545 lbs (247 kg)
Shipping volume:	92.27 ft <sup>3</sup> (2.61 m <sup>3</sup> )
Number and type of grids (included):	6 - Vinyl - Coated Steel
Type of external material:	430 AISI
Type of internal material:	304 AISI
Warranty:	3 / 5 years

### Refrigeration Data

Compressor Horsepower:	1
Refrigerant type:	R290
Refrigerant weight:	150 g
Operating temperature min.:	-7.6 °F
Operating temperature max.:	-4 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost



Refrigeration Equipment  
Reach-In Freezer, 2 Doors, 49 cu.ft - Stainless Steel (R290)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2022.03.01