



*Door panel and handle not supplied by U-Line.



INTEGRATED
SOLID

FEATURES & BENEFITS

PERFORMANCE	<ul style="list-style-type: none">• Uses less than 3 gallons/11.4 liters of water to produce up to 25 lbs / 11.3 kg of ice per day• Up to 25 lbs / 11.3 kg in ice storage capacity• Daily ice production rate is approx. 4 times greater than the average household refrigerator• Crescent ice cube dimensions: 1/2" W x 3/4" H x 2 1/4" L / 13 mm W x 19 mm H x 57 mm L• On/Off switch is conveniently located on lower face of unit
INTERIOR/EXTERIOR	<ul style="list-style-type: none">• No drain required• Door swing is field reversible, and is shipped right-hand hinged
INTEGRATION	<ul style="list-style-type: none">• Unit is designed to be built-in or can be freestanding• Integrated model requires 3/4" / 19 mm custom door panel (panels not supplied by U-Line)• Four independently adjustable leveling legs provide a precise undercounter fit


MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-BI1215INT-20A	230 / 50	Field Reversible	Integrated Solid	89 lb / 40.4 kg

ACCESSORIES

Model	Description	Finish	Shipping Weight
ULAWATERHOOKUP	Braided Water Supply Line Kit	N/A	2 lb / .9 kg


DIMENSIONS

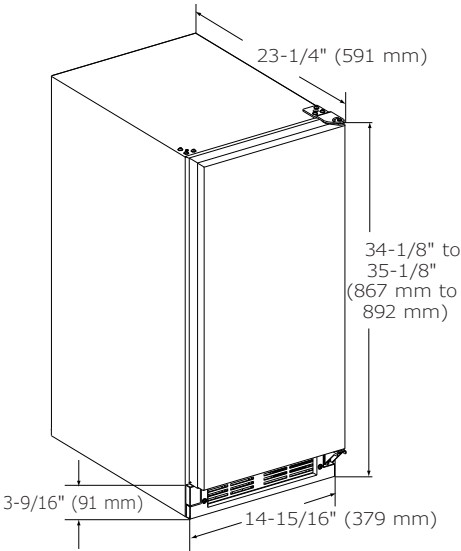

SPECIFICATIONS

Model	U-BI1215INT-20A
Amps: Running	2.5
Control Type	On/Off Switch
Defrost Type	Manual
Dimensions: Product Depth	23 1/4" / 591 mm
Dimensions: Product Height	34 1/8" / 867 mm
Dimensions: Product Width	14 15/16" / 379 mm
Ice Production Per Day	25 lb / 11.3 kg
Ice Storage	25 lb / 11.3 kg
Panel Height	30 1/4" / 768 mm
Panel Thickness	3/4" / 20 mm
Panel Type	Solid Panel
Panel Width	14 3/4" / 375 mm
Product Weight: Max	89 lb / 40.4 kg
Refrigerant Type	R134a

CABINET CUT-OUT

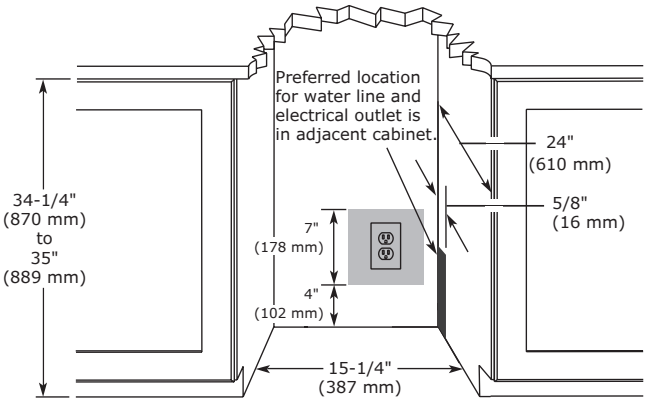

INSTALLATION NOTES

- When installing adjacent to wall, ensure 2 1/2" / 64 mm clearance on hinged side for 90° door opening, allowing ample room for door handle.
- No additional clearance around sides, top or rear of unit is needed for ventilation.
- Do not obstruct front grille air flow.



Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.