




Available in 30" and 36" widths and only 11 1/32" high. This model features professional styling, seamless welded corner craftsmanship, a powerful 600 CFM blower with high airflow, heavy duty stainless steel baffle grease filters, Replaceable LED lighting, plus backlit hidden metallic in/out knobs for convenience and safety.

It also delivers higher efficiency and easy maintenance for a cleaner kitchen.

MOUNTING HEIGHT RANGE

$\geq 24"$ $\geq 30"$

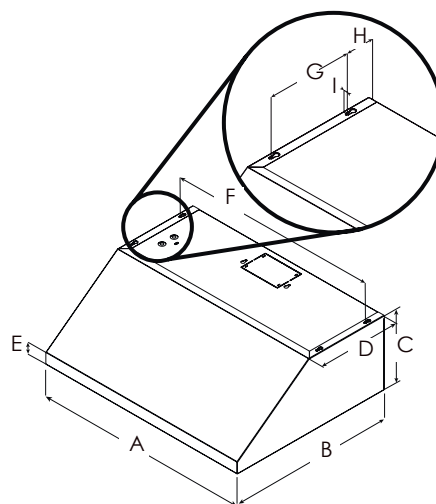

	PUCCM630SS	PUCCM636SS
A	30" (76 cm)	36" (91.54 cm)
B	23" (58.4 cm)	
C	11 1/32" (27.9 cm)	
D	11 11/16" (29.7 cm)	
E	2 19/32" (6.6 cm)	
F	29" (73.3 cm)	35" (88.9 cm)
G	7 1/2" (19 cm)	
H	2 9/16" (6.5 cm)	
I	3/8" (1 cm)	

SPECIFICATIONS

Width:	30" Unit	36" Unit
Model:	PUCCM630SS	PUCCM636SS
Dimensions:	30" W x 23" D x 11 1/32" H	36" W x 23" D x 11 1/32" H
Blower Type(internal):**	600 CFM (4 -speed)	
Noise (sones):	2.0 - 7.0 Sones	
Finish:	Stainless Steel	
Controls:	Fully retractable rotating knobs with white backlighting	
Illumination:	2 LED, 6.5 W 3000 Kelvin 540 lumens/lamp	
Grease Filter:	Professional stainless steel baffle (2)	
Duct Transition:	Rectangular 3" 1/4 x 10" (top and rear)	
Installation Type:	Ducted or Recirculating with kit	
Electrical:	120V - 60 Hz, 457 Watts	
KITS:		
Long Chimney Extension 6":	ACC02159	ACC02158
Long Chimney Extension 12":	ACC02160	ACC02161
Back Splash Kit:	ACC0142864	ACC0142867
Recirculation Kit:	ACC02770 (contains 2 round carbon filters & cabinet grate)	
WARRANTY:	Two (2) years parts & in-home labor	

PLUS FEATURES



QUIET SYSTEM - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



Grease Collecting Baffle Filters - Intended for high airflow cooking, Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.



Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.



Superior performance - High performance ventilation with blowers ranging from 600 to 1200 CFM.



Certified Ratings	High Speed	Working Speed	Duct Size
CFM Sones	430 11	160 2	3.25 x 10" (Horizontal)
CFM Sones	442 11	177 2	3.25 x 10" (Vertical)

* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.