

QUIET COOL™ BUILT-IN 42"W. SIDE-BY-SIDE

Viking Professional 5 Series – VCSB

PROCHILL TEMPERATURE MANAGEMENT SYSTEM

- ENERGY STAR Qualified
- Variable Speed DC Overdrive™ Compressor quickly chills food and saves energy
- Single compressor system is one of the quietest, most technologically advanced compressors available
- Electronic controls maintain even temperatures within one degree °F to keep food fresher longer
- ■Odor Eliminator™ Evaporator removes odors and excess humidity
- Maintenance-free Super Clog Resistant™ Condenser prevents dust and other airborne particles from clogging the condenser

FILTER-FREE FRESHNESS

- **EXCLUSIVE** PlasmaclusterTM Ion Air Purifier uses advanced ion technology to eliminate airborne bacteria, mold, and odors to enhance food preservation
- Functions at 100% capacity and never degrades, never needs replacing, and no maintenance is ever required

THE LATEST IN SPILL CONTROL TECHNOLOGY

- New Spillproof Plus™ Shelves with Nano technology create an invisible barrier to contain spills
- Seamless glass shelves make cleanup easy and maximize usable space
- 3/8" thick tempered glass shelves provide industry-leading durability

LED LIGHTING

- All items are in clear view with bright energy efficient LED lighting from top and sidewalls
- Ramp on theater lighting provides better visibility

SPECIALIZED REFRIGERATION STORAGE

- ■Two adjustable Humidity Zone™ Drawers with NEW soft-close slides
 - Humidity can be set high for leafy greens or low for fruits and vegetables with skins
- NEW Additional space for large pizza box storage
- Four deli drawers with soft-close slides
- Two in-the-door dairy compartments with covers
- Four Patented (three are adjustable) aluminum door bins securely store heavy items
- Adjustable door stops 90,110 and 120 degrees



SPECIALIZED FREEZER STORAGE

- Three adjustable wire shelves for custom storage
- Two slide-out, large capacity wire baskets provide easy storage viewing
- Three patented adjustable aluminum door bins
- Adaptive defrost controls the timing of the defrost periods, instead of an electromechanical defrost timer
 - Extends to 96 hours improves food storage because the unit defrosts less often
- Factory-installed automatic ice maker features large-capacity ice bucket
- Door alarm sounds and glows to warn that fresh food door and/ or freezer drawer have been ajar for three minutes, and that the temperature has risen above normal operating range

MODEL NUMBERS

■VCSB5423 – 42"W. Side-by-Side Refrigerator/Freezer

ACCESSORIES

- PBIRFTKSS Flush mount trim kit
- PSSPL4 Side panel left standard mount
- PSSPR4 Side panel right standard mount
- TOP42 Top panel for use with side panels

COLOR FINISHES

- Available in seven exclusive color finishes
- Stainless Steel (SS), Black (BK), White (WH), Apple Red (AR), Burgundy (BU), Cobalt Blue (CB), Graphite Gray (GG),





WARRANTY

- 3-year full covers complete unit
- 6-year full sealed refrigeration system
- 12-year limited sealed refrigeration system






QUIET COOL™ BUILT-IN 42"W. SIDE-BY-SIDE

Viking Professional 5 Series – VCSB

42"W. SIDE-BY-SIDE		
DESCRIPTION	VCSB5423	VCSB5423 FLUSH MOUNT
Overall Width	42" (106.7 cm)	
Overall Height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.	
Overall Depth from rear To front edge of side trim: To front of top grille: To front of handle endcap:	23-3/4" (60.3 cm) 26-1/4" (66.7 cm) 29-3/16" (74.1 cm)	25-1/2" (64.8 cm) 26-1/4" (66.7 cm) 29-3/16" (74.1 cm)
Cutout Width	41-5/8" (105.7 cm) min. to 41-3/4" (106 cm) max.	42" (106.7 cm)
Cutout Height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.	
Cutout Depth	24" (61.0 cm) min.	26-1/2" (67.3 cm) min.
Electrical Requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product	
Maximum Amp Usage	9.9 amps	
Inlet Water Requirements	1/4" copper tubing inlet waterline; min. 20 psi; max. 120 psi	
Overall Interior Dimensions Refrigerator Freezer Total Capacity	15.76 cu. ft. (446 liters) 9.56 cu. ft. (271 liters) 25.32 cu. ft. (717 liters)	15.76 cu. ft. (446 liters) 9.56 cu. ft. (271 liters) 25.32 cu. ft. (717 liters)
Approximate Shipping Weight	525 lb. (238 kg)	525 lb. (238 kg)

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

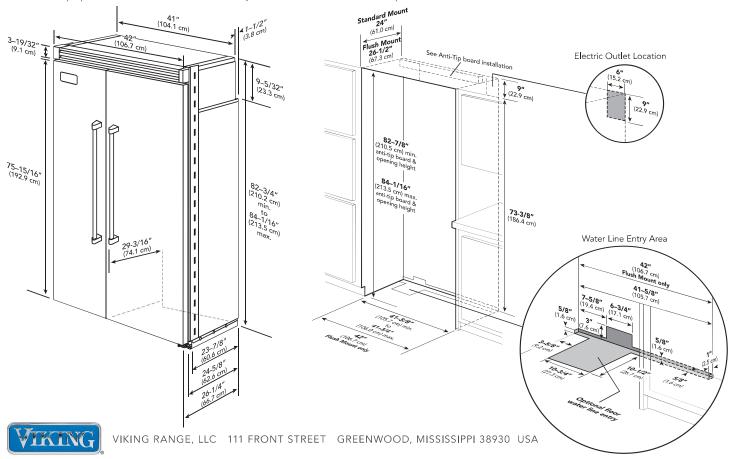

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com © 2015 Viking Range, LLC All rights reserved. Specifications subject to change without notice.

F60367 0315