

# PCHLC636SS

Wall-mount Chimney Hood

**YALE**  
APPLIANCE




With a gently tapered stainless steel canopy that measures only 5" high, this model conveys understated elegance.

Available in 36", its features include a powerful 600 CFM blower, LED lighting with dimmable feature, stainless steel baffle slot filters and a black panel touch control that delivers convenience and safety.

Designed for standard ducted installation, this model can also be installed as a recirculating system using the Recirculating Kit, available as an accessory.

## MOUNTING HEIGHT RANGE

± ±  
≥ 24" ≥ 30"

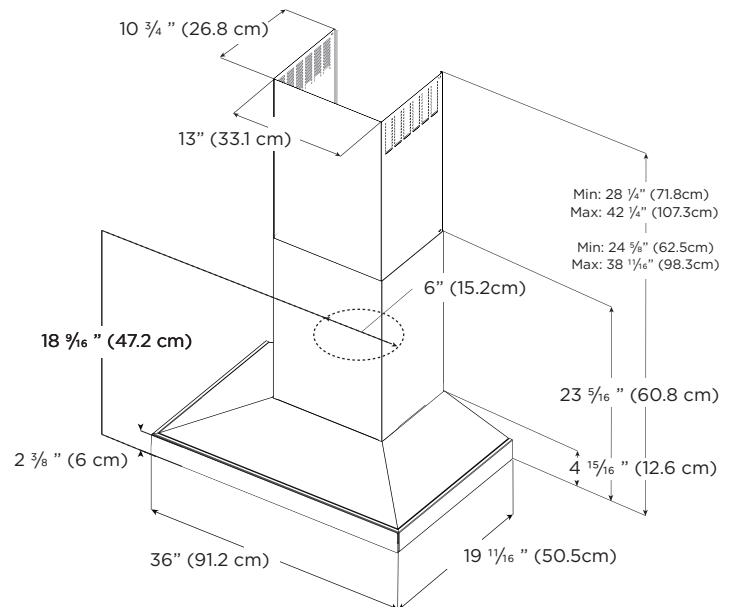

# PCHLC636SS

## Wall-mount Chimney Hood

**YALE**  
APPLIANCE

### SPECIFICATIONS

<b>Width:</b>	36" Unit
<b>Model:</b>	PCHLC636SS
<b>Dimensions:</b>	36"W x 19 11/16"D x 5"
<b>Blower Type(internal):**</b>	600 CFM(4-speed)
<b>Noise (sones):**</b>	1.5 - 6.8 Sones
<b>Finish:</b>	Stainless Steel
<b>Controls:</b>	Black Panel Touch Control
<b>Illumination: (Replaceable Lamps 2 Intensities)</b>	2 LED, 2.1Watts 4000 KELVIN 180 LUMEN/Lamp
<b>Grease Filter:</b>	(3) Stainless Steel Baffle Slot Filters
<b>Duct Transition:</b>	6" Round with Backdraft Damper (top only)
<b>Installation Type:</b>	Ducted or Recirculating with Kit
<b>Mounting Height Range:</b>	Electric ≥ 24", Gas ≥ 30"
<b>Electrical:</b>	120V - 60 Hz, 495 Watts
<b>ACCESSORIES:</b> <b>Long Chimney Ext.</b>  <b>Recirculating Kit:</b>	 ACC01935 - Reaches 7'9" - 10'9" (ducted), 8'1" - 11'1" (recirculating) ACC02785 - Reaches 8'8" - 12'4" (ducted), 9'0" - 12'8" (recirculating)  ACC0102875 (Contains 6" Deflector and 3 Flat Carbon Filters and Clips)
<b>INSTALL HEIGHTS:</b> <b>Standard duct covers:</b>	 Reach ceiling heights of 7'0" - 9'2" (ducted), 7'5" - 9'6" (recirculating)
<b>WARRANTY:</b>	<b>Two (2) years parts &amp; in-home labor</b>

### FEATURES



**QUIET SYSTEM** - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



**STAINLESS STEEL BAFFLE SLOT FILTERS** - With a baffle shape and a mesh backing, it allows airflow while preventing grease from passing through. Grease is collected in the baffle cavities with high capacity.



**ADJUSTABLE LIGHTING** - Customize the light brightness according to your preferences, creating a tailored and practical lighting experience that contributes to the ideal kitchen atmosphere.



**AIR FLOW CONTROL** - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



**LED LIGHTING** - High Quality LED with 20,000 hours of lifespan allows a significant energy saving.

### AIRFLOW CONTROL

Air Flow Control technology enables the user to reduce the maximum blower CFM of your hood achieving <300 CFMs, to meet local code requirements.



\* The product images shown are for illustration purposes only and may not be an exact representation of the product.

\*\* CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.