
# **PCHLV136S1**

## Wall-mount PRO Chimney Hood



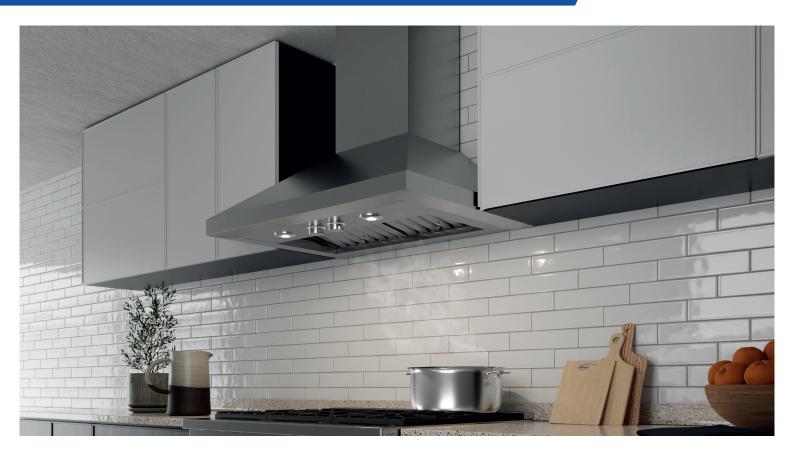


Give a splash of Italian design to your professional kitchen with crisp lines, seamless welded corner craftsmanship, beveled rim and gleaming stainless steel.

This model has the extra depth (24") and power 1200 CFM needed to support professional ranges and cooktops. No ear plugs required with our HUSH sound suppression system, which enables you to comfortably talk and entertain, even when cooking up a storm. Available in 36" width, this hood features backlit hidden knob controls, which operate the 4-speed blower and LED lighting.

### MOUNTING HEIGHT RANGE

 $\begin{array}{c|c}
 & \bullet \\
 & \bullet \\
 & \geq 24" \geq 30"
\end{array}$ 



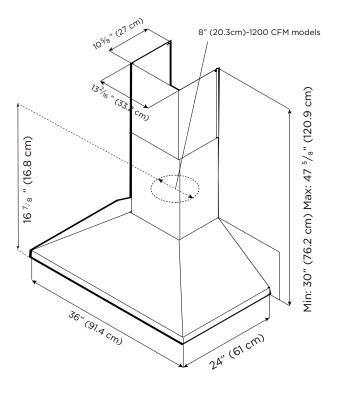

## **PCHLV136S1**

## Wall-mount PRO Chimney Hood



### **SPECIFICATIONS**

Width:	36" Unit
Model:	PCHLV136S1
Dimensions:	36"W x 24"D x 12 1/8"H
Blower Type(internal):**	1200 CFM(4-speed)
Noise (sones):**	Min: 1.7 , Max: 8.5
Finish:	Stainless Steel
Controls:	Fully retractable rotating knobs with white backlighting
Illumination: (Replaceable Lamps 1 Intensity)	2 LED, 7.5 Watts 3000 KELVIN 540 LUMEN/Lamp
Grease Filter:	Professional stainless steel baffle (3)
Duct Transition:	8" Round with BackDraft Damper (top only)
Installation Type:	Ducted or Recirculating with Kit
Mounting Height Range:	Reach ceilling hights of 7'6"- 10'0" (ducted), 8'0" - 10'0" (recirculating)
Electrical:	120V - 60 Hz, 913 Watts
ACCESSORIES:	
Long Chimney Ext.	ACC02785 (can reach up to 13' ceillings) ACC01935 (can reach up to 11'4" ceillings)
External Blower Shell Kit:	ACC0179547 (8" or 10" duct size compatible)
Inline Blower Shell Kit:	ACC0179549 (8" or 10" duct size compatible)
Recirculating Kit: Carbon filters:	ACC0192765 (Contains 4 round carbon filters)
Deflector:	ACC0192759 (Metal recirculating deflector for 8" ducting)
WARRANTY:	Two (2) years parts & in-home labor

#### **FEATURES**



QUIET SYSTEM - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



Grease Collecting Baffle Filters - Intended for high airflow cooking, Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.



Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.



Superior performance - High performance ventilation with a 1200 CFM blower.

#### **AIRFLOW CONTROL**

Air Flow Control technology enables the user to reduce the maximum blower CFM of your hood achieving <300 CFMs, to meet local code requirements.

This model includes an Electronic Bypass Kit that needs to be placed at the moment of installing.







 $<sup>^{</sup>st}$  The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>\*\*</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.