PUCCM636S1 Undercabinet






Available in 30" width this model features professional styling, seamless welded corner craftsmanship, a powerful 600 CFM blower with high airflow, heavy duty stainless steel baffle grease filters, replaceable LED lighting, plus backlit hidden metallic in/out knobs for convenience and safety.

It also delivers higher efficiency and easy maintenance for a cleaner kitchen.

MOUNTING **HEIGHT RANGE**



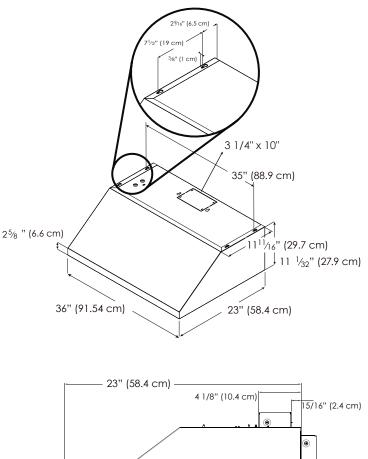

11111

1 1/2" (3.7 cm)



SPECIFICATIONS

Width:	36" Unit
Model:	PUCCM636S1
Dimensions:	36"W x 23"D x 11 1/32" H
Blower Type(internal):**	600 CFM(4-speed)
Noise (sones):**	2.0 - 7-0 Sones
Finish:	Stainless Steel
Controls:	Fully retractable rotating knobs with white backlighting
Illumination: (replaceable lamps 1 intensity)	2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp
Grease Filter:	(2) Grease Collecting Stainless Steel Baffle
Duct Transition:	3 1/4" x 10" with Backdraft Damper (top and rear)
Installation Type:	Ducted or Recirculating with Kit
Mounting Height Range:	Electric ≥ 24 ", Gas ≥ 30 "
Electrical:	120V - 60 Hz, 457 Watts
ACCESSORIES: Long Chimney Ext 6": Long Chimney with grates: Long Chimney Ext 12": Stainless Steel Backsplash: Recirculating Kit:	ACC02158 ACC0207174 ACC02161 ACC0142867 ACC02770 (contains 2 round carbon filters & cabinet grate)
Inline Blower Shell Kit: External Blower Kit:	ACC0205342 (600 CFM, 6" duct size), ACC0154387 (1200 CFM, 8" or 10" duct size compatible) ACC0153054 (1200 CFM, 8" or 10" duct size compatible

WARRANTY:

()

1111)

AFC

Two (2) years parts & in-home labor

FEATURES

QUIET SYSTEM - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.

Grease Collecting Baffle Filters - Intended for high airflow cooking, Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.

Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.

AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs,to meet local code requirements.

Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.

Superior performance - High performance ventilation with blowers ranging from 600 to 1200 CFM.

AIRFLOW CONTROL

Air Flow Control technology enables the user to reduce the maximum blower CFM of your hood achieving <300 CFMs, to meet local code requirements.

This model includes an Electronic Bypass Kit that needs to be placed at the moment of installing.



* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.