**BOSCH** 

800 Series Dryer with Home Connect® - WQB245AXUC



WQB245AXUC Pearl Steel

The 800 Series dryer is a perfect companion to the 800 series washer, matching in quality, performance and design.

### **Features & Benefits**

With the Home Connect® app, control and monitor your appliance remotely and receive helpful notifications on your smart device, including when a cycle is complete.

The heat pump dryer with Self-cleaning Condenser™ rinses lint with every cycle and simplifies dryer maintenance.

Reduce wrinkles and minimize ironing with new Steam Restore feature.

The 4.0 cu. ft. drum has a large capacity to fit a variety of loads.







General Properties	
Dryer type	Heat Pump
Drum material	Stainless Steel
Interior light	Yes (LED)
Ventless drying (no ducting)	Yes
Stackable	Yes with Stacking Kit Accessory
Silence level	62 dBA
Programs (No.), [Special]	(14) [Steam Restore, Sportswear]
Options (No.), [Special]	(8) [Smart Dry, Dryness Level]
Home Connect® (Wi-Fi enabled)	Yes
Energy consumption	125 kWh/yr
ENERGY STAR® certified	Most Efficient 202
Capacity	
Capacity	4.0 cu. ft.
<b>Design Elements</b>	
Door ring	Chrome
Control type	
<b></b>	Premium LED touch
Dial	touch
	touch
Dial	touch Illuminated jog dia
Dial Bosch logo on door glass	touch Illuminated jog dia
Dial Bosch logo on door glass Technical Details	touch Illuminated jog dia Yes
Dial Bosch logo on door glass Technical Details Energy source	touch Illuminated jog dia Yes Electric
Dial Bosch logo on door glass Technical Details Energy source Watts	touch Illuminated jog dia Yes Electric 900 W
Dial Bosch logo on door glass Technical Details Energy source Watts Circuit breaker	touch Illuminated jog dia Yes  Electric 900 W 15 A*
Dial Bosch logo on door glass Technical Details Energy source Watts Circuit breaker Volts	touch Illuminated jog dia Yes  Electric 900 W 15 A* 208/220-240 V
Dial Bosch logo on door glass Technical Details Energy source Watts Circuit breaker Volts Current	touch Illuminated jog dia Yes  Electric 900 W 15 A* 208/220-240 V 4 A 60 Hz (Yes)
Dial Bosch logo on door glass Technical Details Energy source Watts Circuit breaker Volts Current Frequency Power Cord (included)	touch Illuminated jog dia Yes  Electric 900 W 15 A* 208/220-240 V 4 A 60 Hz (Yes) [240V; NEMA 6-15
Dial Bosch logo on door glass Technical Details Energy source Watts Circuit breaker Volts Current Frequency Power Cord (included) [Type]	touch Illuminated jog dia Yes  Electric 900 W 15 A* 208/220-240 V 4 A 60 Hz (Yes) [240V; NEMA 6-15 3-prong]

Dimensions & Weight	
Overall appliance dimensions (HxWxD)	33 1/4" x 23 1/2" x 26"
Net weight	121 lbs
Minimum stack height	67 3/4"

## †ADA compliance

- Meets ADA height and access requirements when installed on pedestal.
- Meets ADA operable parts requirements for controls and lint filter.

#### **Accessories**

#### **Dryer Stacking Kits**





WTZ2750XUC Kit w/Shelf

WTZ2751XUC Kit w/out Shelf

#### **Power Adapters**









WTZPA20UC 4-Prong

WTZPA30US 3-Prong

Bosch Dryers are supplied with WTZPA20UC adapter to fit a standard 4-Prong, 30A, Dryer receptacle (NEMA 14-30R) to power both Bosch Washers and Dryers.

Note: – 3-Prong Adapter may be ordered directly from Bosch (not supplied with Washer or Dryer).

 Use of two individual NEMA 6-15R or 6-20R receptacles/circuits may be used as alternative means to power Washer and Dryer.



**WTZPW2XD** Dryer Pedestal



WMZ20600 Drying Rack

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.


<sup>\*</sup>Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit.

<sup>\*</sup>To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.



800 Series Dryer with Home Connect® - WQB245AXUC

## **Installation Details**

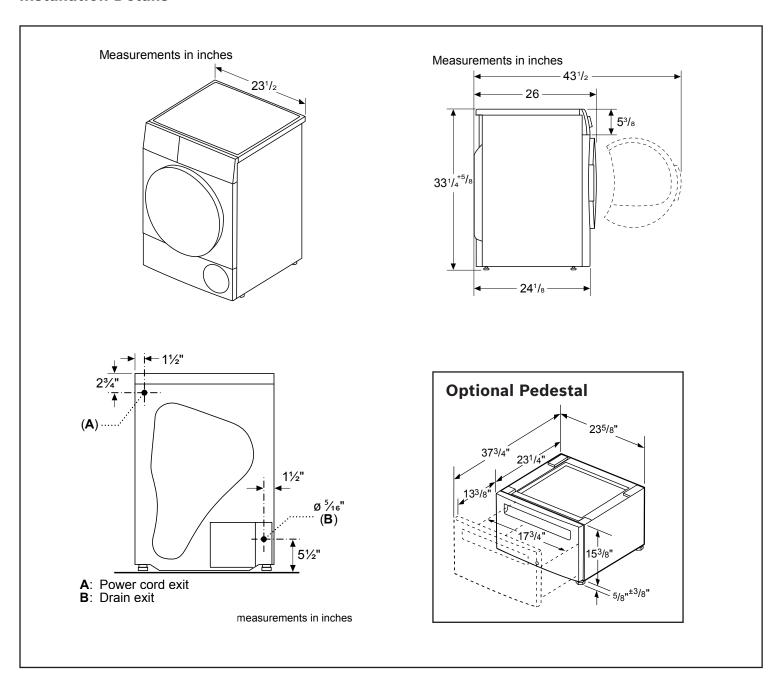


Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.



800 Series Dryer with Home Connect® - WQB245AXUC


## **Installation Details**



- A: Dryer
- B: Washer
- C: Power Adapter
  All references to NEMA 14-30R
  Dryer receptacles in this document
  have the orientation with the
  ground pin up.

Use of two individual NEMA 6-15R or 6-20R receptacles may be used as alternative means to power Washer and Dryer.

Dimensions reflect use of stacking kits.

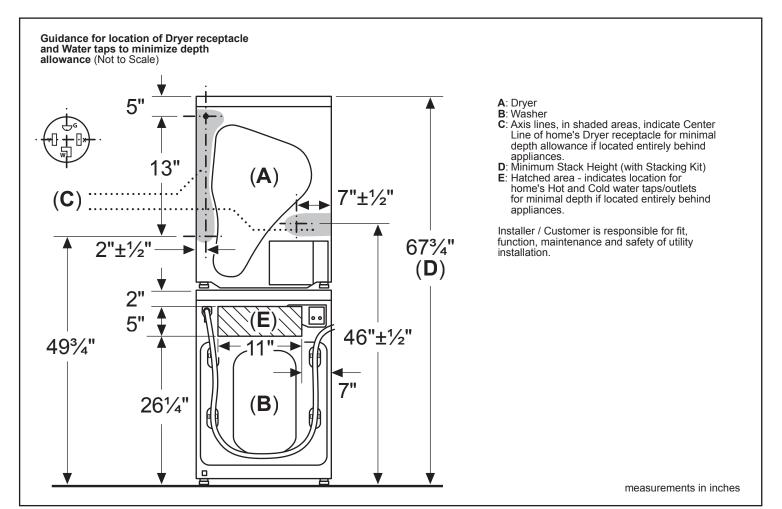

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.



800 Series Dryer with Home Connect® - WQB245AXUC

## **Installation Details**





## Minimum clearance requirements (Stacked, Stand Alone or Side by Side): A: Both sides (left and right) – 1/2"

**B**: Top – 61/4" **C**: Rear – 3"

**D**: Front – ½"

Minimum door undercut (louvered area): E: Undercut height (Top and Bottom) – 1¼" Louvered areas of equal total sizes and split between upper and lower portions of door are permitted.


F: Undercut width (Top and Bottom):

– 24" minimum for Stacked and Stand Alone

– 48" minimum for Side by Side

For shortest drying times keep closet door open while dryer is operating. When closet doors are closed, open areas only allow minimal drying results (expect long drying times).

### **Under Counter**



# Minimum opening dimensions: A: Depth -28" B: Width -23% C: Height -34%

Front of appliance fully open. No doors or coverings.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.