

MODEL#

FM7431-Q

ASSEMBLY INSTRUCTIONS

TOOLS REQUIRED



Allen Wrench

(Included)



Phillips Screwdriver

(Not Included)



2 - People Recommended

ASSEMBLY RATING





ASY —

- DIFFICULT

The Assembly Rating is a 5-point system showing the level of effort needed to assemble a specific product.

VERSION # 26-12-19

PRE ASSEMBLY INTRODUCTION

We understand building ready-to-assemble furniture can be a challenging experience for some. To help avoid confusion, we have provided some helpful tips that may speed up the process.





Teamwork

ALWAYS have at least two people to help with transporting and assembling the product to avoid potential injury and/or damage.





Suitable Location

Assembling near the area of the intended location is highly recommended.





Sufficient Space

Make sure you have enough space to move around during the assembly.





Avoid Scratches

Use cardboard, blankets or a carpeted area while assembling furniture to prevent scratches.





Flat Surface

Make sure the furniture rests on a flat and level surface with each log evenly touching the floor.

ASSEMBLY AND CARE ADVICE




FAILURE TO FOLLOW THE GUIDELINES BELOW MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.



Position each part correctly and insert screws or bolts into their respective holes.



Use the appropriate hand tools or power tools for assembly. Select steps, such as tightening screws and/or bolts, may require hand tools to avoid causing damage during assembly.



Turn clockwise to tighten and only tighten when step is completed or when instructed to do so.



Save the instructions and store any supplied tools for later maintenance.



After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.


IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.


BED


FM7431-Q



- Please keep instructions for future reference.
- Check the quantity and irregularity of parts and hardware before you start.

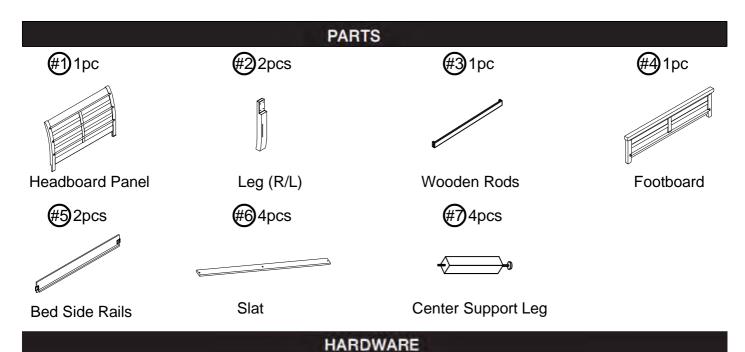

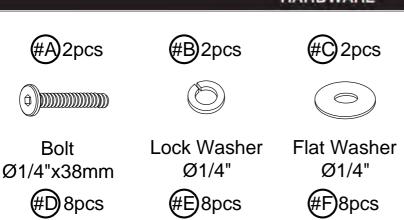




Bolt Lock Washer Flat Washer Allen Wrench Screw Ø5/16"x40mm Ø5/16" Ø5/16" M4 4x30mm

(#H)8pcs

Exploded View

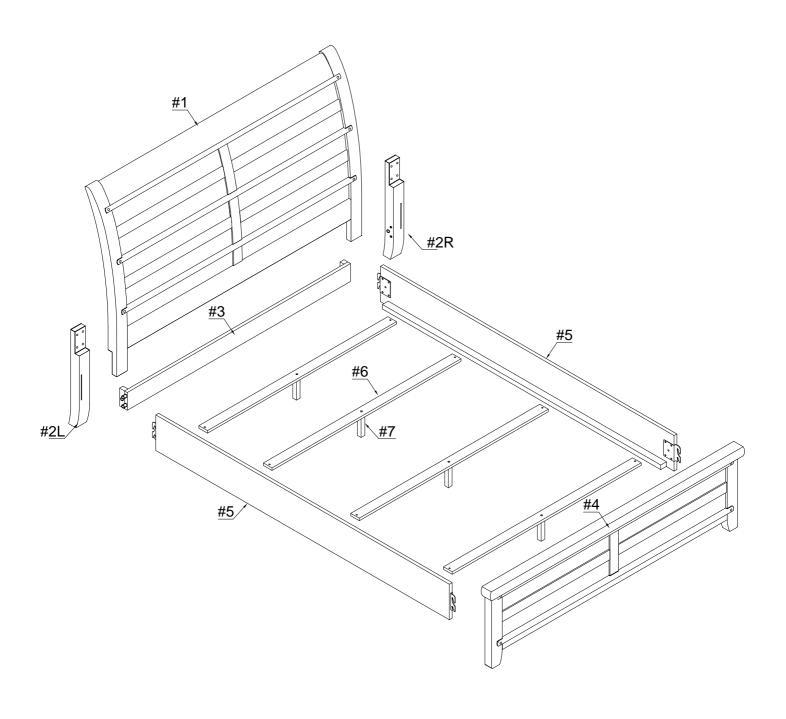

FM7431-Q is packed in 3 cases

Carton	Disignation	Part		Hardware	
FM7431-Q-HB	Headboard panel	#1			#A x2pcs
				6	#B x2pcs
					#C x2pcs
	Leg(R/L)	#2			#D x8pcs
				6	#E x8pcs
	Wooden Rods	#3			#F x8pcs
					#G x1pc
FM7431-Q-FB	Footboard	#4			
	Slats Rolls	#6		Ommon	#H x8pcs
	Center Support Leg	#7	₹		
FM7431-Q-R	Bed Side Rail	#5			

ASSEMBLY INSTRUCTIONS

1

Part #1 x 1pc
Part #2 x 2pcs

Part #3x 1pc

Hardware #Ax 2pcs

Hardware #Bx 2pcs


Hardware (E) x 2pcs

Hardware (Dx 8pcs

Hardware #Ex 8pcs

Hardware #Fx 8pcs

Hardware (x 1pc

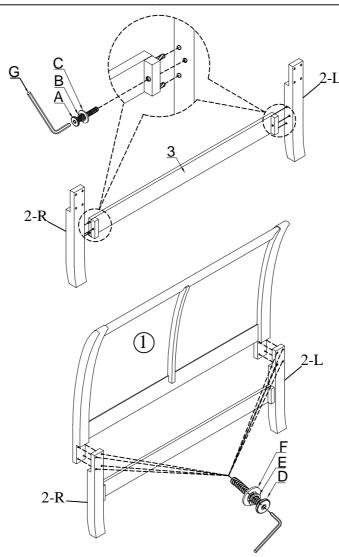



2

Part #1 x 1pc

Part #4x 1pc

Part #5 x 2pcs

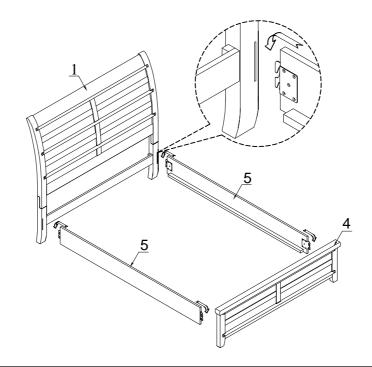

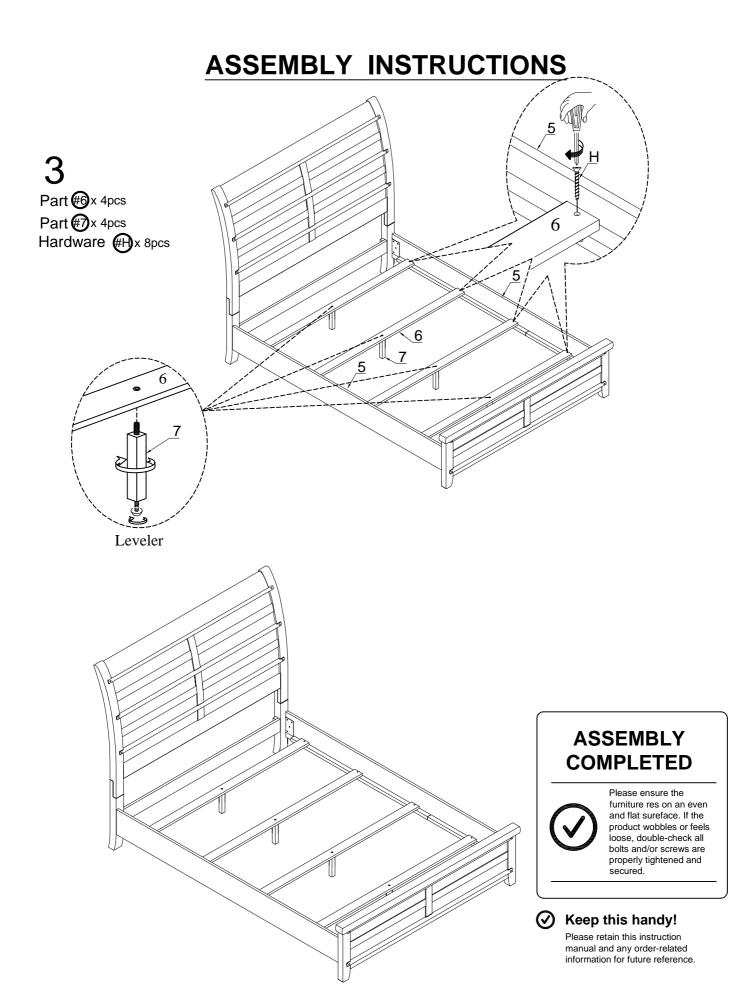

ASSEMBLY INSTRUCTIONS

Wall Mounting and Fixing



EXPANSION WALL ANCHOR

Our provided expansion wall anchors are only suitable for masonry walls, such as drywall, plaster or concrete, and are best for holding lightweight items or for anti-tip prevention. If you are unsure of the correct wall anchor to use with the product, please request professional guidance. liability for product damage or failure due to using the incorrect anchors will fall on the installer.




CHECK BEFORE PROCEEDING

Prior to drilling or hammering, please check for wires or pipes. We recommend using a stud finder to locate a stud, which will offer more appropriate resistance and hold more weight.

QUICK TIPS


 If unsure of the proper size, always choose a larger screw and wall anchor.






Match the drill bit to the wall anchor and hole size.

 Only drill horizontally.
 Do not force the drill or enlarge the hole for the wall anchor.





4. Take extra care when drilling into high walls or ceramic tiles. Wall anchors should be a tight tit for the hole. Never use wall anchors in ceilings.





We recommend a yearly check to see if the wall anchor or screw has loosened. If so, please remove the existing wall anchor and screw, and use a new anchor.