
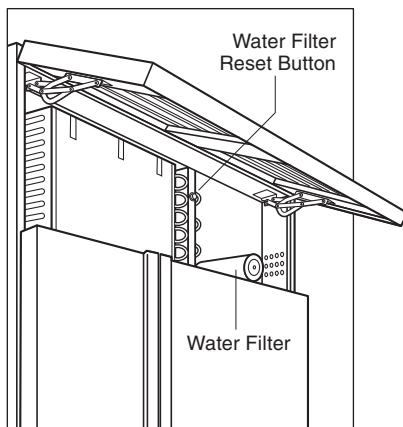


INSTALLING THE WATER FILTER BYPASS PLUG


- 1) Lift the grille assembly to access the water filter. To lift the grille, pull out on the bottom edge of the grille and tilt the grille frame forward.
- 2) To remove the filter cartridge, simply push the cartridge in and then pull it out. There will be water in the filter cartridge, so it is normal for a small amount of water to spill out. Refer to the illustration below.
- 3) Remove the filter bypass plug from its packaging and carefully remove the caps.
- 4) Line up the plug so that the tabs will slide around the filter base.
- 5) Push the bypass plug in until you hear a click.
The bypass plug is securely installed if it cannot be removed by pulling on it slightly.
- 6) Once the bypass plug has been installed, press the filter reset button five times within a seven second period to deactivate the filter life monitor. The filter life monitor has been successfully deactivated if the  indicator is no longer displayed in the control center display panel. Refer to the illustration below for the location of the filter reset button.

IMPORTANT NOTE: If you wish to reinstall a water filter after use of a bypass plug, be sure to reactivate the filter life monitor. After filter installation, press the filter reset button five times within a seven second period. The filter life monitor is now active.

Contact Sub-Zero at 800-222-7820 for further information.



Water filter location

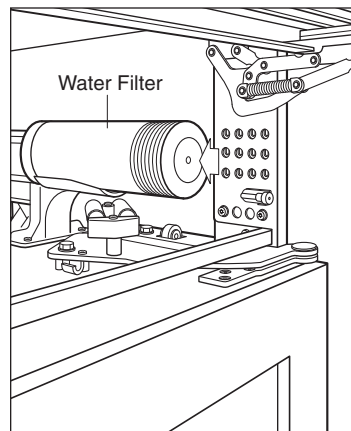

Water filter cartridge removal