

30" Built-In Over-and-Under

Over-and-under model BI-30U offers easyaccess refrigerated storage with a roll-out freezer drawer. Sub-Zero dual refrigeration along with new air purification and water filtration systems guard the freshness of your food and water like nothing before. Framed, overlay, flush inset and stainless steel design options are available. The flush inset installation allows the unit to sit flush with surrounding cabinetry. Model BI-30U is ENERGY STAR® qualified.



FEATURES

- Dual refrigeration system ensures the freshest food and energy efficiency.
- Electronic microprocessor constantly monitors entire unit to ensure proper food storage environment.
- Air purification system reduces odors, bacteria, viruses and ethylene gas.
- Advanced water filtration system.
- Illuminated touch control panel.
- Bright interior lighting throughout, including storage drawer area.
- Adjustable spill-proof glass shelves, door shelves and dairy compartment.
- Soft-close crisper and deli drawers form a lower temperature zone ideal for produce and meats.
- Easy-access flip-up grille.
- Informational freshness cards.
- Full-extension, roll-out freezer drawer.
- Max ice feature increases production for a 24-hour period.





Air purification system.

Flip-up grille.



MODEL OPTIONS BI-30U/O BI-30U/S/TH BI-30U/S/PH Overlay/Framed/Flush Inset Design Stainless Stainless Grille Panel Stainless Stainless Handle Tubular Pro

INTERIOR FEATURES

Refrigerator

13.2 cu ft Capacity Air Purification System

- 3 Adjustable Glass Shelves
- 1 Stationary Glass Shelf
- 1 High-Humidity Drawer with Divider
- 1 Storage Drawer with Divider
- 2 Adjustable Door Shelves
- 1 Stationary Door Shelf Adjustable Dairy Compartment

Freezer

4.1 cu ft Capacity Water Filtration System Full-Extension Roll-Out Freezer Drawer Two-Tier Wire Storage Baskets Automatic Ice Maker







ACCESSORIES


- Grilles for 83" or 88" finished height (84" is standard).
- Framed front panels in white or stainless
- Flush inset and dual flush inset panels in stainless steel with tubular or pro handles.
- Dual installation kit with or without dual wide grille, 84" finished height.
- Custom front panel mounting kit.
- Side panel in white or stainless steel.
- Stainless steel kickplate.
- Framed grille insert and full-length handles.
- Stainless steel tubular and pro handles.
- Dozen egg container.
- Replacement air purification cartridge and water filter.
- 90° door stop.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

^{*}Handle not included to allow for design flexibility.



OVERALL DIMENSIONS

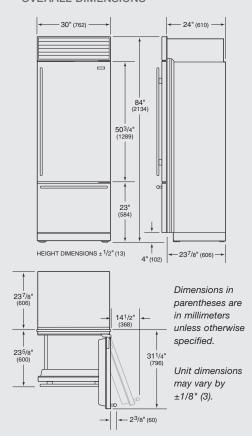

SPECIFICATIONS

Overall Dimensions	30"W x 84"H x 24"D
Door Clearance	Standard 31 ¹ / ₄ " Flush Inset 31 ³ / ₄ "
Opening Width Flush Inset Width	29 ¹ / ₂ " 32"
Opening Height Flush Inset Height	83 ³ / ₄ " 84"
Opening Depth Flush Inset Depth	24" 26 ³ / ₁₆ "
Electrical Requirements	s 115 V AC, 60 Hz 15 amp circuit
Plumbing Requirements 1/4" OD copper, braided stainless steel or PEX tubing 35–120 psi	
Shipping Weight	462 lbs


INSTALLATION NOTES

Built-In models may be used in a standard installation or in a flush inset installation which allows the unit to be flush with surrounding cabinetry.


Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

INSTALLATION SPECIFICATIONS


Standard Installation

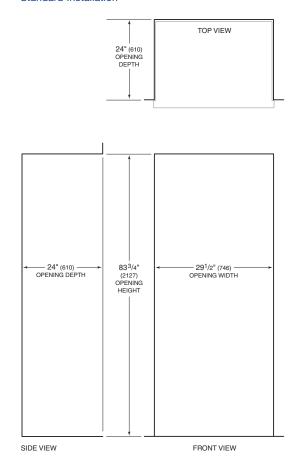


Flush Inset Installation

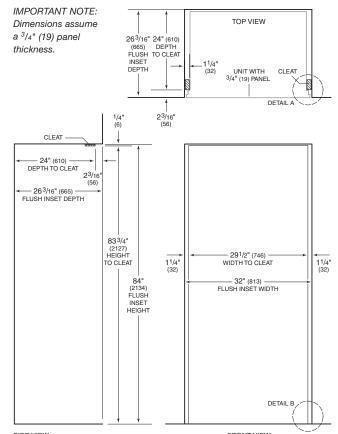

Location of **Electrical Supply**



Location of Water Supply-Rear



Location of Water Supply-Bottom

