





# INFINITY

## MASSAGE CHAIRS


- 4 Step 4:** Grab the footrest with both hands and lift it out of the seat pad. Place the footrest upright near the massage chair.

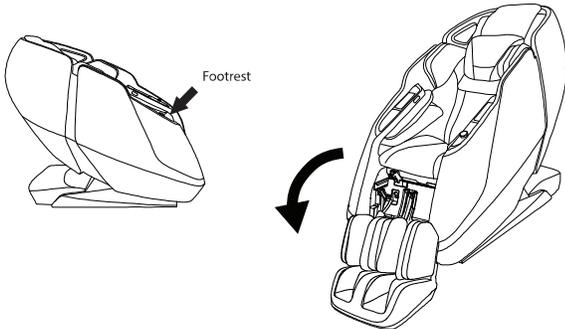


- 6 Step 6:** Lift the metal bracket on the left and right side of the chair body, position the two footrest shafts into the metal brackets. Close the bracket cover on both, insert a small screw on each side, turn until tight.

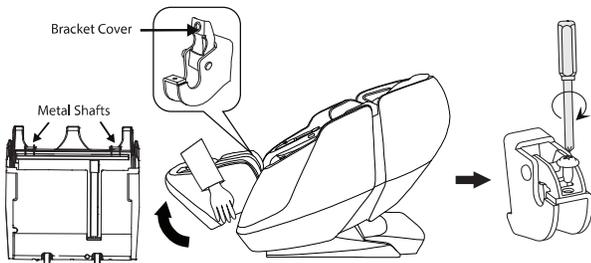


- 5 Step 5:** Unscrew the small screw from each side of the metal brackets located on the legrest within the massage chair footrest area. Notice the electrical port and air nozzle port. Move the footrest to the massage chair, locate the air nozzle and electrical plug on the back of the footrest. Firmly push in both electrical plug and air nozzle into the electrical port and air nozzle port in the massage chair's footwell area.

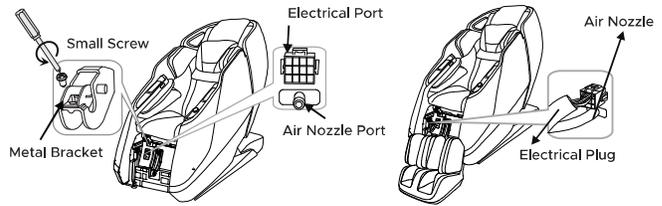


- 7 Step 7:** Locate the tablet holder, align the keyed post with the receiver on the right arm and gently push down until it clicks into place.

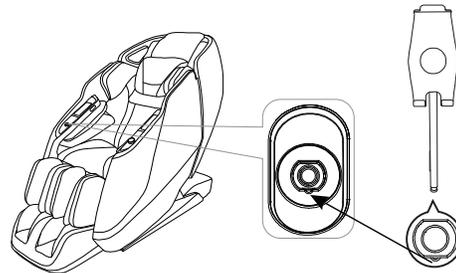


- 8 Step 8:** Slide the bottom of the tablet into the holder, then snap the top into place. Locate the tablet's connection port between the seatpad and right armrest, then align the notch key and pins and gently push the plug in. Screw the collar to secure the connection, then tuck the cord back between the seatpad and armrest.

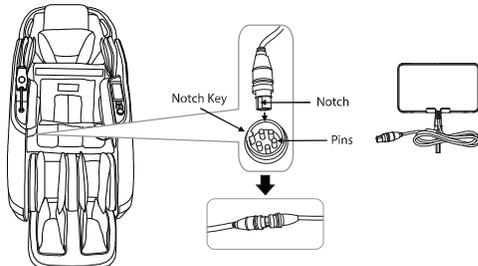

- 9 Step 9:** Remove any protective covering on the velcro, if attached. Lift the seat pad up and notice the two straps underneath the seat cushion, pass them through the rings on the bottom of the seatpad. Connect them with the velcro. Next, notice the air hose ports and air hose nozzles. Both of them should be connected together, if not, push them together until tight. Check to make sure that the heat plug and port on the left side of the seatpad is connected. Now, attach the legrest velcro to the front of the seat.



- 10 Step 10:** Locate the zippers on the massage chair's backrest, zip up both sides until secure. Position the seatpad on top of the velcro in front of the seat pad, attaching them to secure.

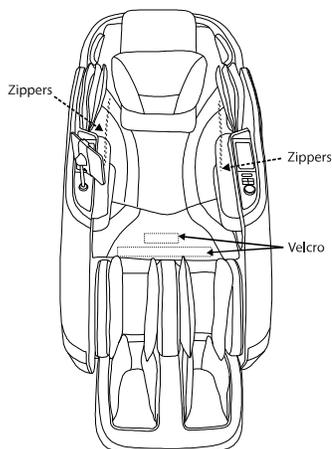

- 11 Step 11:** Grab the power cord and place the plug into a grounded 120V outlet. Plug the other end into the back lower bottom of the massage chair. Now, press the switch to "ON" or "I". Locate the smart dial on the left side of the armrest, press the power button to turn on the massage chair's touch screen tablet. Tap the warning screen confirmation and choose an auto program.

