## Foster Induction hob

## S4000 Bridge - 7323 945

### HIGHLIGHTS




**Extended cooking area** Bridge function allow to associate two zones forming a single extended cooking area for pots of large size, or for more than one cooking simultaneously, with maximum exibility in pot positioning.



Slider control

The Slider control allows an extremely quick temperature setting: with a light touch of the finger you may select the desired power level on the TOUCH display.



#### **Bevelled edge**

Special slanting edge that gives a clean and elegant finish with both the installation methods (flush-mount and overmount).

#### Recal

This feature allows you to call back the last settings selected in the previous cooking.

FOSTER MILANO INC. 6001 NORTH POWERLINE ROAD FORT LAUDERDALE, FLORIDA 33309 info@foster-us.com www.foster-us.com



#### Powerboost

Booster function [P], which provides increased power to the selected plate. In particular, when it is activated, the plate works for ten minutes at a very highpower that allows to heat quickly large quantities of water.



#### T-chef

Allows to set particular temperatures (melt 70°C/158°F, simmer 94°C/201°F) and keep them constant during cooking. Elaborate preparations can be easily obtained, with chef-like results.

#### Pause

Allows you to distract your attention from cooking, interrupting and restoring the settings immediately.

#### Full Safety System

Centralised power-off function; Child-proof safety lock; Residual heat warning lights. Safety System that turn off the hob in the absence of the pot; Overflow detector that automatically turns off the plate in case of liquid overflow; Automatic deactivation to prevent accidents caused by forgetfulness.




#### Series S4000 bridge Induction cooker hob 15" x 20 15/32" Dimensions Maintop Black ceramic glass Edge bevelled edge Installation overmount 14 11/64" x 19 19/64" overmount cut-out Power settings 9 settings plus powerboost Commands 4 slider commands Special functions Bridge function T-chef function Pause and Recall indipendent timer Security security lock residual heat light overflow detection **Technical requirments** Electrical supply 208-240 V 50/60Hz



# Foster Induction hob

S4000 Bridge - 7323 945

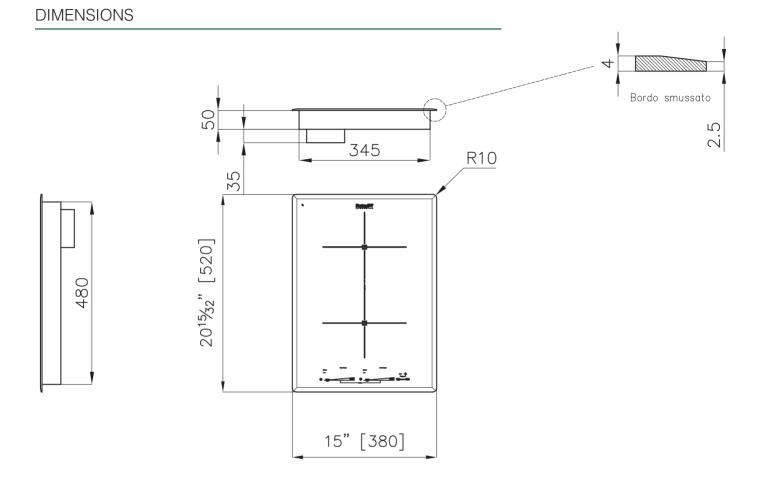

## CUT OUT

14 <sup>11/64</sup>" X 19 <sup>19/64</sup>"



FOSTER MILANO INC. 6001 NORTH POWERLINE ROAD FORT LAUDERDALE, FLORIDA 33309 info@foster-us.com www.foster-us.com