RS36A72UC1

36" ActiveSmart™ Built-in Stainless Steel French Door Refrigerator with Ice & Water



DCS built-in refrigerators take smooth integration to a new level with a high quality stainless steel finish. These refrigerators will provide a cool, clean look to your kitchen while helping to keep your food fresher longer with unique ActiveSmartTM technology. With the slimline water dispenser, internal ice making and SmartTouch controls these refrigerators are designed to match with our family of kitchen appliances.

Features	Benefits	Specifications
Seamless Integration	The Built-in series minimizes gaps through heavy- duty inline hinges and adjustable doors enabling	FINISH
	minimal gaps to create consistent lines throughout	
	your kitchen. The series fits flush with cabinetry	DIMENSIONS
	to reduce disruption and deliver design freedom.	(excluding door panels)
Sized to Suit	The spacious 36" French Door refrigerator is	CABINETRY HEIGHT
cieca io out	designed for family life, with double doors for	(with included trim kit)
	easy access to uninterrupted refrigerator space.	
		CAPACITY
Fresher Food for Longer	ActiveSmart™ technology helps keep your food	Refrigerator
	fresher for longer by constantly monitoring how	Freezer
	you use your fridge and adapting to maintain a	Total
	controlled environment and optimum temperature.	
		ENERGY STAR Certified
Easy Cleaning	Removable, spill-safe cantilevered glass shelves	PERFORMANCE
	are designed to contain drips and spills that can	ActiveSmart [™] technolog
	be simply wiped away, while leaving the interior	
	walls completely smooth and easy to clean.	Frost free freezer
	Storage bins just need a wipe to keep spotless.	Adaptive defrost
		Humidity control system
Flexible Living	These refrigerators adapt to suit your lifestyle	Sabbath mode
	by streamlining food preparation and organization	Internal ice making
	with SmartTouch controls, flexible shelving and	External water dispensi
	storage options, and slide out bins and trays. The	
	water filter is easily accessible for quick cleaning	ACCESSORIES
	or replacement. LED lighting in all compartments	Stainless steel
	lights up all the shelves, bins and trays.	door panel set 72"
Efficient	These ActiveSmart™ refrigerators intelligently	SKU (door panel set)
	adapt to daily use to help save energy, cooling	Water filter part numbe
	and defrosting only when they need to without	
	compromising on food care.	WARRANTY
	-	Parts & labor
		Additional sealed

_ .

....

24 Hours 7 Days a Week Customer Support T 1.888.936.7872 W dcsappliances.com




Specifications

	Door Panel Set sold separately
DIMENSIONS (excluding door panels)	H71 ²⁷ / ₃₂ " x W35 ²¹ / ₃₂ " x D23 ³ / ₄ "
CABINETRY HEIGHT (with included trim kit)	72"
CAPACITY	
Refrigerator	11.7 cu.ft
Freezer	5.1 cu.ft
Total	16.8 cu.ft
ENERGY STAR Certified	•
PERFORMANCE	
ActiveSmart [™] technology	•
Frost free freezer	•
Adaptive defrost	•
Humidity control system	•
Sabbath mode	•
Internal ice making	•
External water dispensing	•
ACCESSORIES	
Stainless steel door panel set 72"	RD3672CU
SKU (door panel set)	24344
Water filter part number	842802
WARRANTY	
Parts & labor	2 years
Additional sealed	3 years
system parts	
SKU	24340
UPC Code	822843243402
UPC Code (door panel set)	822843243440

Stainless Steel Pre-finished

For full specifications visit dcsappliances.com

Cavity Preparation

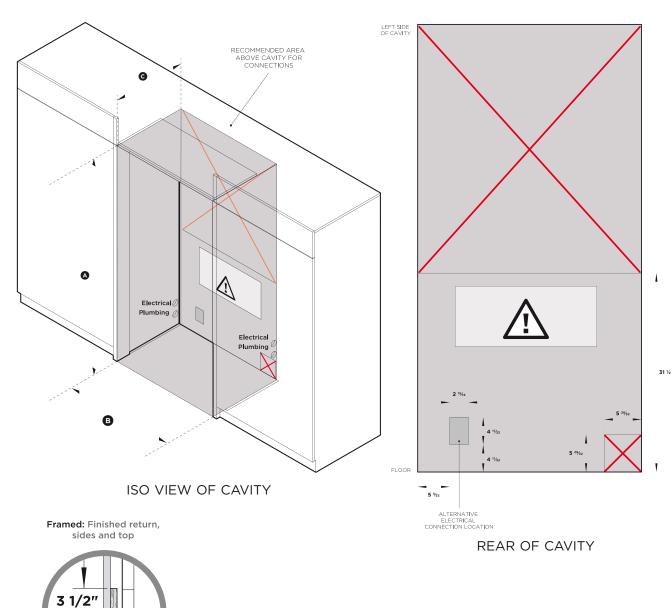

36" ActiveSmart™ Built-in Refrigerator

Model no:

RS36A72UC1 (with Stainless Door panels PART NO. RD3672CU)

Cavity Dimensions	in	
Overall height of cavity	72"	
Overall width of cavity		
when adjoining cabinetry cannot share 5/32" door gap	36"	
© Overall depth of cavity		

115 VAC, 60 Hz
10 amp circuit
1/4" (6mm) PEX hose or copper tubing (to suit local regulations)*
min 22 psi (150 kPa) max 120 psi (827 kPa) @ 68°F (20°C)

NOTE: Recommended that the electrical & water connection be located above the fridge cavity. Optional to locate in an adjacent cabinet to either side of the fridge.

igma Do not locate water or electricity in this area, keep clear of connections.


▲ CAUTION: Central area can only fit electrical plug if it is placed within a recessed cavity.

* Customer to supply.

IMPORTANT NOTE: The product dimensions and specifications apply at the date of issue. Under our policy of continuous product improvement, these dimensions and specifications may change at any time. Dimensions may vary by $\pm 3/32''$. Please read the installation manual for detailed information on installing the product or visit dcsappliances.com.



Data Sheet

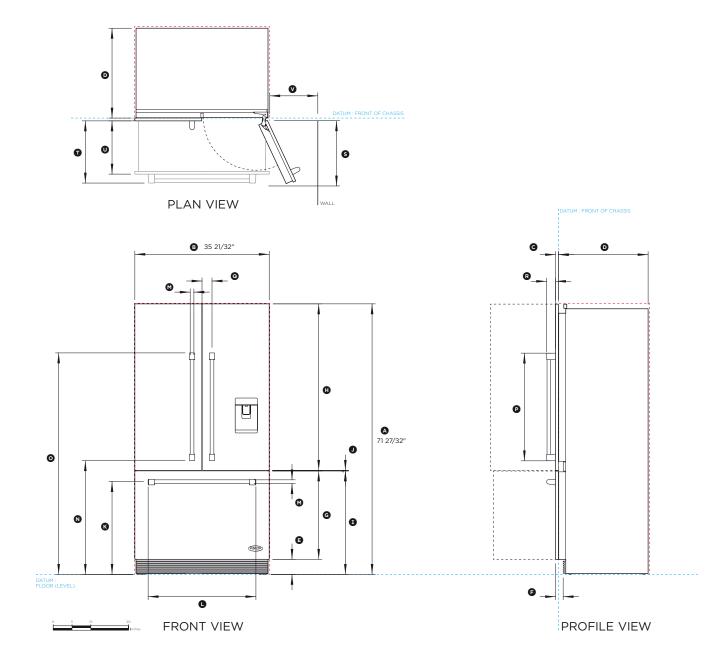

36" ActiveSmart™ Built-in Refrigerator

Model no:

RS36A72UC1 (with Stainless Door panels PART NO. RD3672CU)

Product Dimensions	in
Overall height of fridge	71 27/32"
Overall width of fridge	35 21/32"
© Depth of fridge front panels (excl. handles)	3/4"
 Overall depth of fridge (excl. front door panels) 	23 3/4"
E Height from bottom datum to top of toekick	4"
© Depth of toekick measured from front of door	2"
© Height of bottom drawer panel	23 15/32"
Height of top door panels	44 7/32"
Height from bottom datum to top of drawer panel	27 15/32"
 Gap between top and bottom door panels 	5/32"
© Height from bottom datum to centre of bottom handle	24 21/32"
© Overall width of bottom handle	28 5/8"
${}_{\scriptsize \ensuremath{ \odot}}$ Thickness of handles (not including standoffs)	31/32"
(8) Height from bottom datum to bottom of top handle	30 3/16″
◎ Height from bottom datum to top of top handle	58 13/16″
Overall height of top handles	28 5/8"
Distance from centre of fridge to the centre of top handles	2 5/8″
® Depth of handle (measured from front of door)	1 5/8″
© Depth of door (widest opening) measured from front of door	17 5/16"
⑦ Depth of drawer (open) measured from front of drawer, including handle	15 3/4″
© Depth of drawer (open) measured from front of drawer, excluding handle	14 3/16″
\odot Minimum door clearance to adjacent wall (115° - full internal access)	12 3/4"

Clearances Dimensions	
Minimum cabinetry gap clearance from edge of product	5/32"
Overall height of cavity	72"
Overall width of cavity	
when adjoining cabinetry cannot share 5/32" door gap	36"
Overall depth of cavity	25″

IMPORTANT NOTE: The product dimensions and specifications apply at the date of issue. Under our policy of continuous product improvement, these dimensions and specifications may change at any time. Dimensions may vary by $\pm 3/32''$. Please read the installation manual for detailed information on installing the product or visit dcsappliances.com.

