

# 3024ZWC



## 24" Wine Captain® Model • Modular 3000 Series

### FEATURES & BENEFITS



STAINLESS  
FRAME



STAINLESS  
FRAME (LOCK)



INTEGRATED  
FRAME (STAINLESS  
HANDLELESS PANEL)\*



INTEGRATED  
FRAME



INTEGRATED  
SOLID



INTEGRATED  
SOLID (STAINLESS  
HANDLELESS PANEL)\*

#### PERFORMANCE

- Volume of 4.7 cu ft holds up to 43 wine bottles (750 ml)
- Temperature range: 34°F - 65°F
- U-Select® Control offers four distinct modes:  
Beverage: 34°F - 65°F, Sparkling Wine: 38°F - 50°F,  
White Wine: 45°F - 55°F, Red Wine: 55°F - 65°F
- U-Select® Control with digital OLED display
- Independently controlled dual-zones
- Rubber mounted compressor virtually eliminates vibration

#### INTERIOR/EXTERIOR

- Black interior is illuminated with LED theater lighting that automatically turns off when the door is closed, or can be set to stay on for 3, 6, or 24 hours
- Robust full-extension black coated wine racks allow for easy access and prevent bottles from shifting
- Wine racks accommodate a variety of bottle shapes and sizes; the third and sixth racks allow for larger diameter wine and champagne bottles
- LowE coated, argon gas filled triple thermopane glass door provides protection from harmful UV light
- Stainless steel handle (7/8" diameter)
- The door swing on non-lock models is field reversible, and is shipped right-hand hinged
- Lock models must be ordered right-hand or left-hand hinged

#### INTEGRATION

- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable grille can be shifted front-to-back and up-and-down
- Integrated model requires 3/4" custom panel of your choice, or can accept U-Line Euro Style Handleless Stainless Panel Accessory (must be ordered separately)
- Grille can accept an integrated toe-kick
- Four independently adjustable leveling legs

### MODEL DETAILS

| Model            | Voltage/Hz | Door Swing        | Finish                 | Shipping Weight |
|------------------|------------|-------------------|------------------------|-----------------|
| U-3024ZWCS-00B   | 115 / 60   | Field Reversible  | Stainless Frame        | 160 lb          |
| U-3024ZWCS-13B   | 115 / 60   | Right-Hand Hinged | Stainless Frame (Lock) | 160 lb          |
| U-3024ZWCS-15B   | 115 / 60   | Left-Hand Hinged  | Stainless Frame (Lock) | 160 lb          |
| U-3024ZWCINT-00B | 115 / 60   | Field Reversible  | Integrated Frame       | 157 lb          |
| U-3024ZWCINT-60B | 115 / 60   | Field Reversible  | Integrated Solid       | 150 lb          |


### ACCESSORIES

| Model          | Description                      | Finish    | Shipping Weight |
|----------------|----------------------------------|-----------|-----------------|
| ULASHP24FRAME* | Stainless Handleless Panel Frame | Stainless | 8 lb            |
| ULASHP24SOLID* | Stainless Handleless Panel Solid | Stainless | 12 lb           |


\*Installs on integrated models.

## DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with ¾" integrated panel/frame installed.

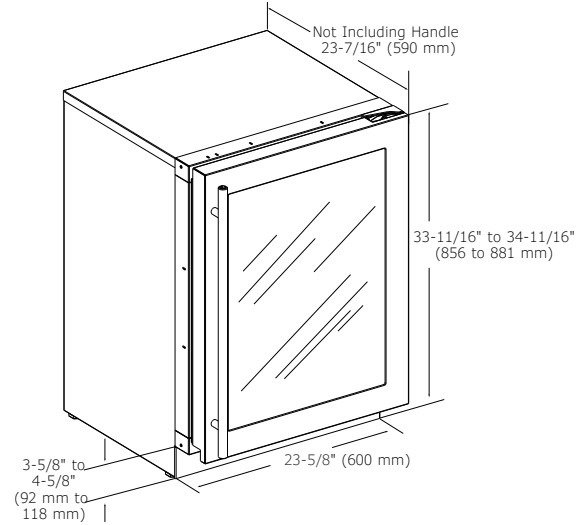

## CABINET CUT-OUT

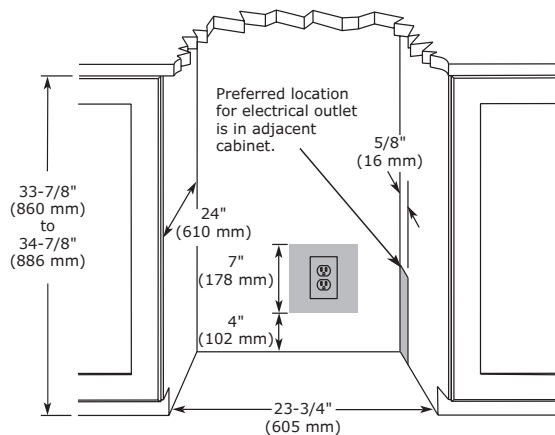

## INSTALLATION NOTES

When installing adjacent to wall, ensure 2 ½" clearance on hinged side for 90° door opening, allowing ample room for door handle.


No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

## SPECIFICATIONS

|                                |                                                      |
|--------------------------------|------------------------------------------------------|
| Model                          | 3024ZWC                                              |
| Amps: Running                  | 1.2                                                  |
| Capacity: Volume (cu ft)       | 4.7                                                  |
| Capacity: Wine Bottle (750 ml) | 43                                                   |
| Control Type                   | U-Select®                                            |
| Dimensions: Product Depth      | 23 7/16" / 590 mm                                    |
| Dimensions: Product Height     | 33 11/16" / 856 mm                                   |
| Dimensions: Product Width      | 23 5/8" / 600 mm                                     |
| ENERGY STAR                    | N/A                                                  |
| Panel Height                   | 30" / 762 mm                                         |
| Panel Thickness                | ¾" / 20 mm                                           |
| Panel Type                     | 2 ¾" / 70 mm Frame Panel or Solid Panel (-60 suffix) |
| Panel Width                    | 23 1/2" / 595 mm                                     |
| Product Weight: Max            | 150 lb                                               |
| Refrigerant Type               | R600a                                                |
| Sabbath (Star K Certified)     | Yes                                                  |
| Temperature Range              | 34°F - 65°F                                          |

## COOLING SYSTEM



## ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Please visit [u-line.com](http://u-line.com) to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.