









Assembly Instructions

DFLT / DFDT45524 / DFWT145524

BENCH

PARTS LIST






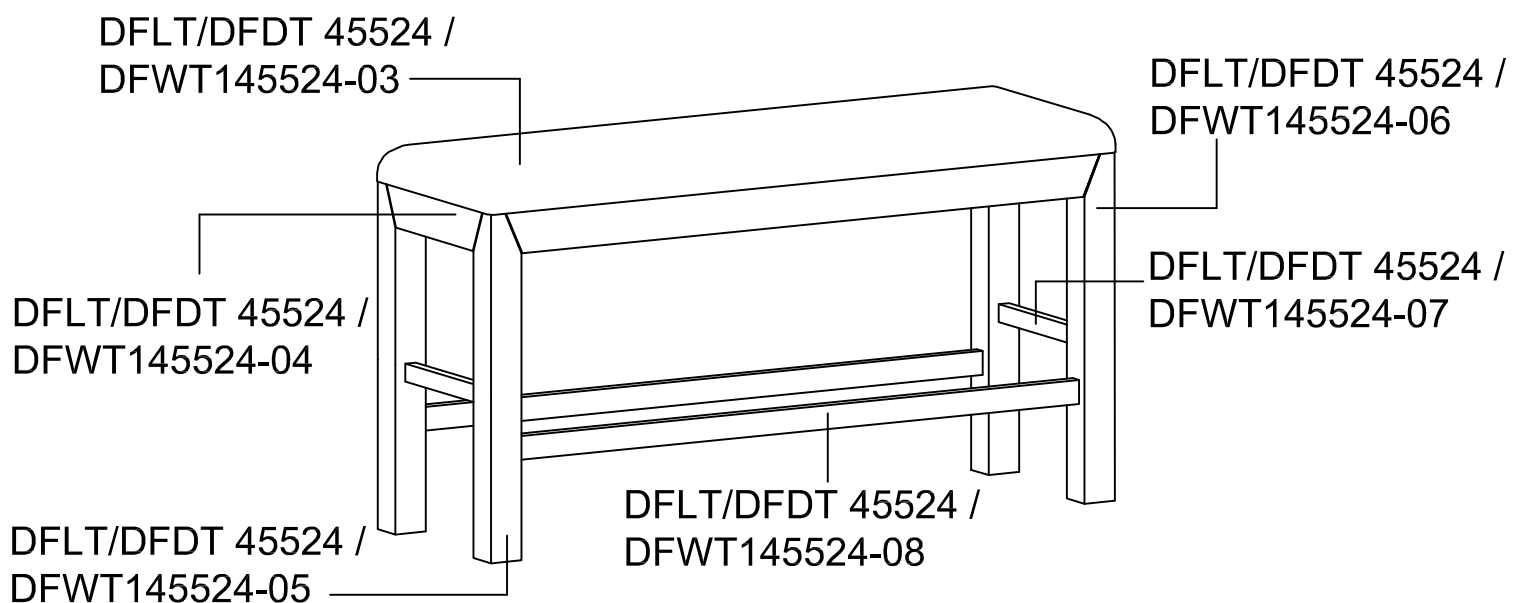PART NO	FIGURE	DESCRIPTION	Q'TY
DFLT/DFDT 45524 / DFWT145524-01		Hardware Bag	1 Pc
DFLT/DFDT 45524 / DFWT145524-03		Cushion Seat	1 Pc
DFLT/DFDT 45524 / DFWT145524-04		Seat Frame	1 Pc
DFLT/DFDT 45524 / DFWT145524-05		Left Leg	2 Pcs
DFLT/DFDT 45524 / DFWT145524-06		Right Leg	2 Pcs
DFLT/DFDT 45524 / DFWT145524-07		Side Stretcher	2 Pcs
DFLT/DFDT 45524 / DFWT145524-08		Front Stretcher	2 Pcs



Assembly Instructions

DFLT / DFDT45524 / DFWT145524
BENCH


HARDWARE PARTS :

 JCBC Bolt 63mm 8 pcs	 Lock Washer 8 pcs	 Flat Washer 8 pcs	 Wood Screw 8 pcs	 Allen Key 1 pc
---	---	---	--	--




ASSEMBLY:

1. Position the Seat Frame on a soft surface such as a carpet. Place the Stretcher into the pre-drilled hole and place the Left and Right Leg to the Corner Block of the frame.
- 2.1 Insert the 63mm JCBC Bolt through a Lock Washer and a Flat Washer and the pre-drilled holes of Corner Block into the pre-drilled holes on the Left and Right Leg by using the provided Allen Key. But do not fully tighten the bolts yet.
- 2.2 Insert Wood Screw into Side Stretcher through the pre-drilled holes, tighten with Screw-Driver (not included).

STEP 1

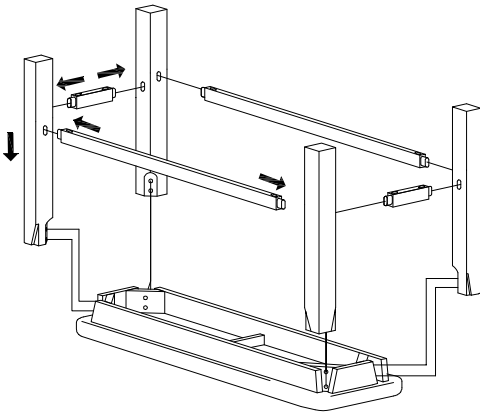


STEP 2

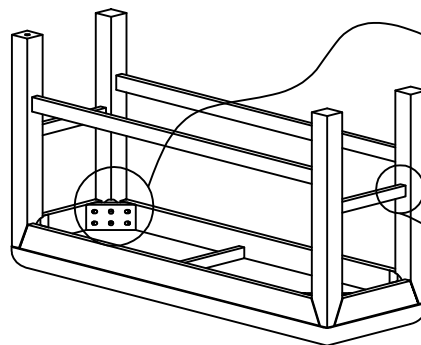

STEP 3

Turn the bench to standing position. Check its balance and tighten all screw and bolt to complete the assembly.

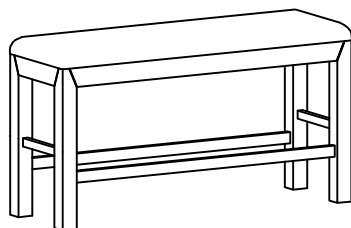

CARE INSTRUCTION

- Be sure to use the same type of polish consistently. Your furniture will appear cloudy or streaky if oil based or wax based polishes are interchanged.
- Spray your furniture surface evenly. Wipe in a circular motion with a soft clean cloth.