









Black Solid





White Solid

Integrated Solid

Key Features

- Makes crescent shaped cubes approx. $^{1}/_{2}$ " W x $^{3}/_{4}$ " H x 2 $^{1}/_{4}$ " L
- Daily ice production is approximately 4 times greater than the average household refrigerator
- White interior
- Produces and stores up to 25 lb (11 Kg) of ice per day
- Stainless steel full-wrap door and handle (1/8" diameter)
- Stainless steel grille (stainless model), black metal grille (black, white, & integrated models)

- Field reversible door is shipped right-hand hinged
- Integrated model requires $\frac{3}{4}$ custom door panel and handle (not supplied by U-Line)
- Built-in or freestanding
- Four adjustable leveling legs
- No drain required

Model Details


Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHCR115-SS01B	115 / 60	Field Reversible	Stainless Solid	91 lb
UHCR115-IS01B	115 / 60	Field Reversible	Integrated Solid	87 lb
UHCR115-BS01B	115 / 60	Field Reversible	Black Solid	91 lb
UHCR115-WS01B	115 / 60	Field Reversible	White Solid	91 lb


Accessories

Model	Description	Finish	Shipping Weight
ULAWATERHOOKUP	Braided Water Supply Line Kit	N/A	2 lb

28" (711 mm) 34 ½" to 35 ½" (867 mm to 892 mm)

Front

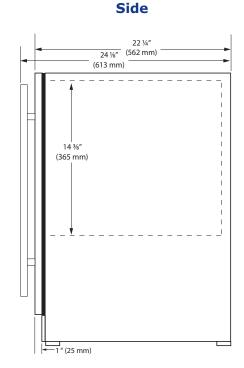

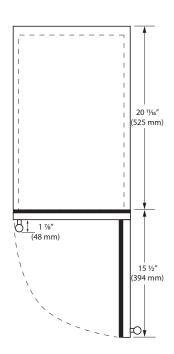


Top


Specifications

Model	HCR115
Amps: Running (115 v)	2.5 A
Capacity Ice	25 lb (11 Kg)
Defrost Type	Manual
Dimensions: Product Depth	22 ¹ / ₄ " / 562 mm
Dimensions: Product Height	34 ½" / 867 mm
Dimensions: Product Width	14 ¹⁵ / ₁₆ " / 379 mm
ENERGY STAR	N/A
Energy Consumption: Avg. Per Year	N/A
Ice Production	25 lb (11 Kg)
Ice Type	Crescent Ice
Panel Height	30 ¹ / ₄ " / 768 mm
Panel Thickness	3/4" / 20 mm
Panel Type	Solid Panel
Panel Width	14 ¾" / 375 mm
Refrigerant Type	R600a

Back



Cabinet Cut-Out



Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



Installation Notes

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow





Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.