

Refrigeration Equipment Bar Equipment 3-glass door Refrigerator, 20.8 cu.ft, 72" (R290)

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738274 (KCHBB72G)

3-door back bar refrigerator
with glass door, 72", R290
refrigerant gas, +33/+41°C

Short Form Specification

Item No.

Back bar refrigerator with glass doors. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel in painted steel; interior back and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control.

Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External digital temperature display.
- External temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.


Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Optional Accessories

- 3 shelves for 72" back bar (one right and one left shelves) PNC 880610 ☐
- shelf clips PNC 880611 ☐

APPROVAL: _____

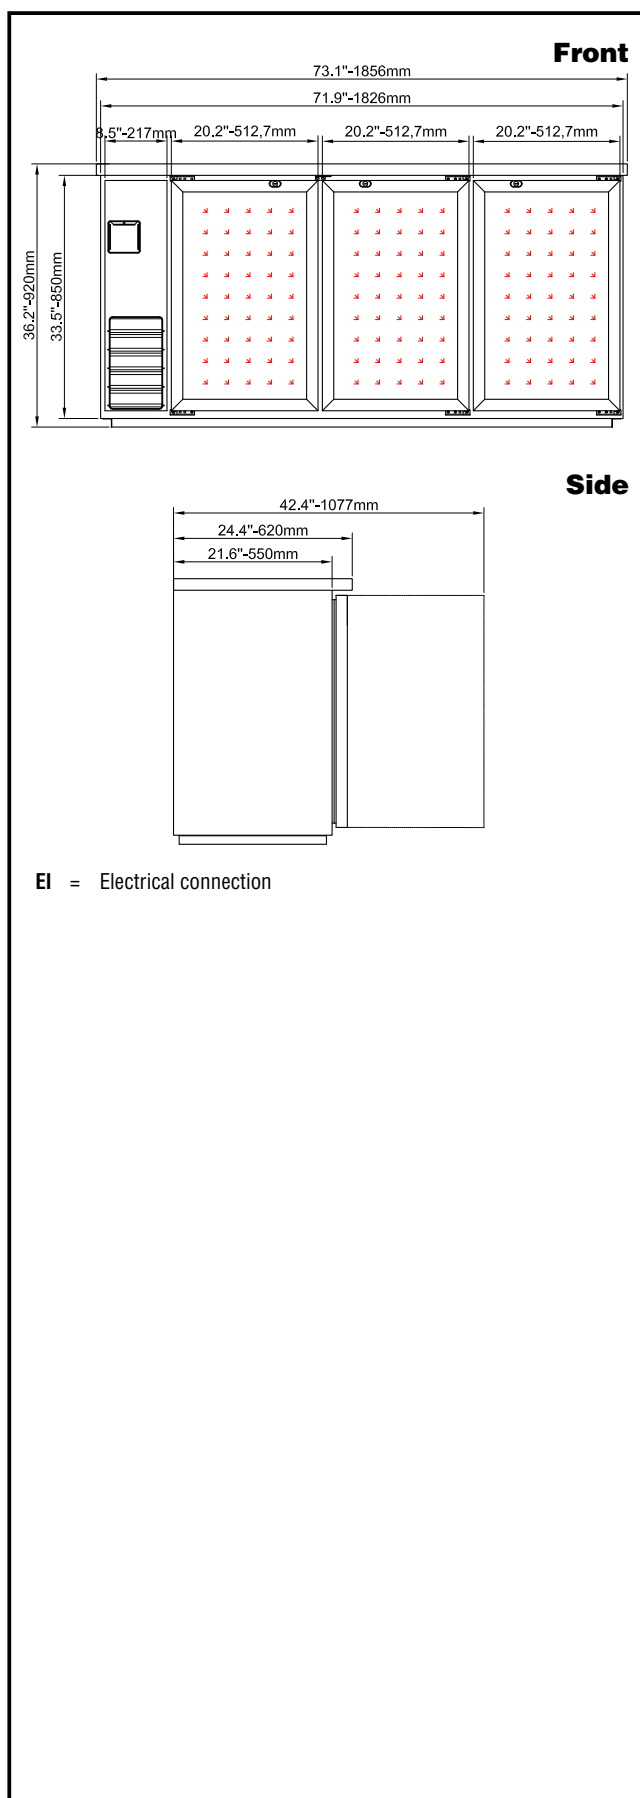

Electric

Supply voltage:	115 V/1 ph/60 Hz
738274 (KCHBB72G)	
Electrical power, max:	0.3 kW
Current consumption:	3 Amps
Plug type:	USA NEMA 5-15P

Capacity:

Gross capacity:	20.8 cu.feet
-----------------	--------------

Key Information:

Door hinges:	1 Left+2 Right
External dimensions, Width:	73 1/16" (1856 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	36 3/16" (919.48 mm)
Number and type of doors:	3 Glass
Internal Dimensions (depth):	18 1/2"
Internal Dimensions (height):	28 15/16"
Internal Dimensions (width):	60 3/16"
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	417 lbs (189 kg)
Shipping volume:	47.8 ft ³ (1.35 m ³)
Number and type of grids (included):	6 - Vinyl-Coated Steel
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/4
Refrigerant type:	R290
Refrigerant weight:	130 g
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube