



HIGH-VALUE FEATURES IN AN ECONOMICAL PACKAGE

4.1 Cu. Ft Impeller Washer

MLV41N1AWW White

The Midea Impeller Top Load Washer features a large, 4.1 Cu. Ft. capacity and 8 pre-set cycles including extra rinse and soak options, a stainless-steel tub and a look-through lid.

Large, 4.1 Cu. Ft. Capacity

The larger tub sizes let you fit more towels and sheets in a single load saving time and effort.

Look-Through Lid

Easily see where your laundry is in the cycle without opening the lid and stopping the washer.

8 Pre-set Cycles

A variety of pre-sets let you match the cycle to the garments you're washing: Normal, Delicate, Heavy Duty, Drain and Spin, Rinse and Spin, Bulky Items, Tub Clean, Quick Wash.

4.1 Cu. Ft. Impeller Washer

Model MLV41N1AWW



SPECIFICATIONS

Models	MLV41N1AWW	
UPC	810004812536	
Color	White	
PERFORMANCE		
DOE	Yes	
ENERGY STAR®	-	
IMEF (cu. ft./kWh/cycle)	1.57	
IWF (gallons/cycle/cu. ft.)	6.5	
Max Spin Speed (RPM)	680	
Vibration Reduction	Yes	
UL Certification	Yes	
FEATURES		
Capacity (cu. ft.)	4.1	
No. of Cycles	8 (Normal, Delicate, Heavy Duty, Drain & Spin, Rinse & Spin, Bulky Items, Tub Clean, Quick Wash)	
No. of Options	6 (Delay, Child Lock, Soak, Extra Rinse, Fabric Softener, Water Plus)	
Automatic Temperature Control	Yes	
Automatic Load Sensing	Yes	
No. of Soil Levels	4 (Extra Heavy, Heavy, Medium, Light)	
No. of Temperature Selections	4 (Hot, Warm, Cold Tap, Cold)	
Detergent Dispenser	Bleach, Softener	
Delay Start	Yes, up to 24 hours	
Child Lock	Yes	
Water Plus	Yes	
Extra Rinse	Yes	
Soak	Yes	
Safe Shut Lid	Yes	
Time-Remaining Display	Yes	
End-Of-Cycle Signal	Yes	
ELECTRICAL		
Power Supply	120V/60hz	
Input Power (W)	600	
Amperage (A)	10	
UL Listed	Yes	
Power Cord Included	Yes	
PHYSICAL ATTRIBUTES		
Tub/Drum Material	Stainless Steel	
Included Accessories	Drain Hose, Hose Holder, Hose Clamp & Screw	
Control Panel	Dial / Membrane	
Lid / Trim	Glass / White	
Color	White	
Dimensions (W*D*H)	in	27 x 28.1 x 43.3
	cm	68.6 x 71.4 x 110
Warranty	Parts & Labor, 1 Year	

4.1 Cu. Ft Impeller Washer & 6.7 Cu. Ft. Front Load Dryer

Models MLV41N1AWW, MLE41N1AWW, MLG41N1AWW


Alcove or Closet or Wall Insert/Recessed Installations

Minimum clearances between the unit and adjacent walls or other surfaces:

Sides (in / cm)	1 / 2.5	Rear (in / cm)	6 / 15.2
Top (in / cm)	24 / 61	Closet Front (in / cm)	2 / 5.1
Gap between the end of water valve and the wall (in / cm)	5 / 12.7		

If installing in an alcove or closet, minimum clearances for closet door:

Minimum total area of two unobstructed air openings (in ² / cm ²)	72 / 465	Minimum clearance at the top and bottom (in / cm)	3 / 7.6
--	----------	---	---------

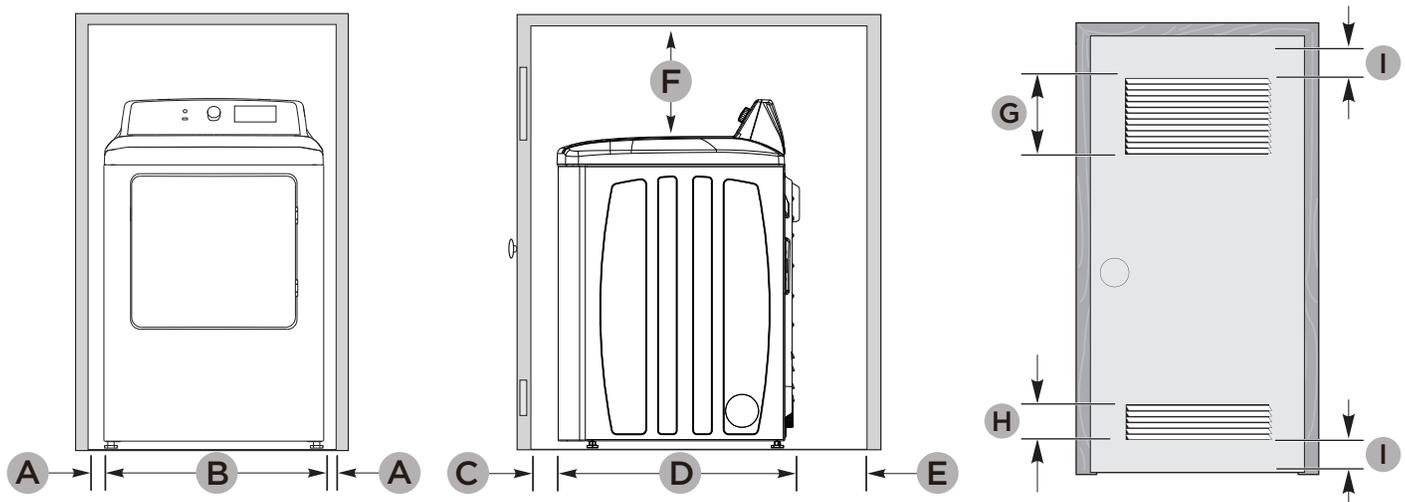

A (in / cm)	1 / 2.5
B (in / cm)	27 / 68.6
C (in / cm)	2 / 5.1

D (in / cm)	30.1 / 76.5
E (in / cm)	5 / 12.7
F (in / cm)	24 / 61

G (in ² / cm ²)	48 / 310
H (in ² / cm ²)	24 / 155
I (in / cm)	3 / 7.6

WARNING

- The dryer must be exhausted to the outside to reduce risk of fire when installed any place inside the house.
- No other fuel-burning appliance should be installed in the same closet as the dryer.



VERSATILE DRYING OPTIONS. AFFORDABLE PRICE POINT.

6.7 Cu. Ft. Front Load Dryer

MLE41N1AWW White (Electric)

MLG41N1AWW White (Gas)

Our versatile, 6.7 Cu. Ft. Dryer has 8 pre-set cycles and 4 temperature settings along with a convenient auto-dry feature. The reversible door can be adjusted to open from the left or right for maximum placement versatility.

Large, 6.7 Cu. Ft. Capacity

Dry everything at once including king-size comforters, towels and linens with the extra-large drum.

Sensor Dry

A sensor detects when your clothes are dry and automatically stops the dryer saving energy.

8 Total Cycles

5 Sensor Dry: Normal, Delicate, Casual, Heavy Duty, Bulky

3 Manual: Quick Dry, Time Dry, Air Fluff

6.7 Cu. Ft. Front Load Dryer

Models MLE41N1AWW, MLG41N1AWW

SPECIFICATIONS

Models	MLE41N1AWW (Electric) / MLG41N1AWW (Gas)	
UPC	810004812543 / 810004812550	
Color	White	
PERFORMANCE		
ENERGY STAR®	-	
FEATURES		
Capacity (cu. ft.)	6.7	
No. of Cycles	Total	8
	Sensor Dry	Normal, Delicate, Casual, Heavy Duty, Bulky
	Manual Dry	Quick Dry, Time Dry, Air Fluff
No. of Options	4 (My Cycle, Child Lock, Time Adjust, Wrinkle Care)	
Sensor Dry	Yes	
No. of Dryness Level Selections	4 (Very Dry, More Dry, Normal, Less Dry)	
No. of Temperature Selections	4 (High, Medium, Low, No Heat)	
Interior Light(s)	-	
Lint Filter	Yes	
Lint Filter Indicator Light	Yes	
My Cycle	Yes	
Steam Function	-	
Reversible Door	Yes	
3-Way Venting	Yes	
Exhaust Vent Location	Rear (Bottom, Left)	
End-Of-Cycle Signal	Yes	
ELECTRICAL		
Voltage (V)	120/240 (Electric) / 120 (Gas)	
Amperage (A)	23 (Electric) / 11 (Gas)	
UL Rated	Yes	
Power Cord Included	- (Electric) / Yes (Gas)	
PHYSICAL ATTRIBUTES		
Tub/Drum Material	Aluminized Alloy Steel	
Drum Rear	Stainless Steel	
Double Layer Drying Rack	-	
Control Panel / Color	Dial, Membrane / White	
Door / Trim	Injection White	
Color	White	
Dimensions (W*D*H)	in	27 x 30.1 x 43
	cm	68.6 x 76.5 x 109.2
Warranty	Parts & Labor, 1 Year	

4.1 Cu. Ft Impeller Washer & 6.7 Cu. Ft. Front Load Dryer

Models MLV41N1AWW, MLE41N1AWW, MLG41N1AWW


Alcove or Closet or Wall Insert/Recessed Installations

Minimum clearances between the unit and adjacent walls or other surfaces:

Sides (in / cm)	1 / 2.5	Rear (in / cm)	6 / 15.2
Top (in / cm)	24 / 61	Closet Front (in / cm)	2 / 5.1
Gap between the end of water valve and the wall (in / cm)		5 / 12.7	

If installing in an alcove or closet, minimum clearances for closet door:

Minimum total area of two unobstructed air openings (in ² / cm ²)	72 / 465	Minimum clearance at the top and bottom (in / cm)	3 / 7.6
--	----------	---	---------

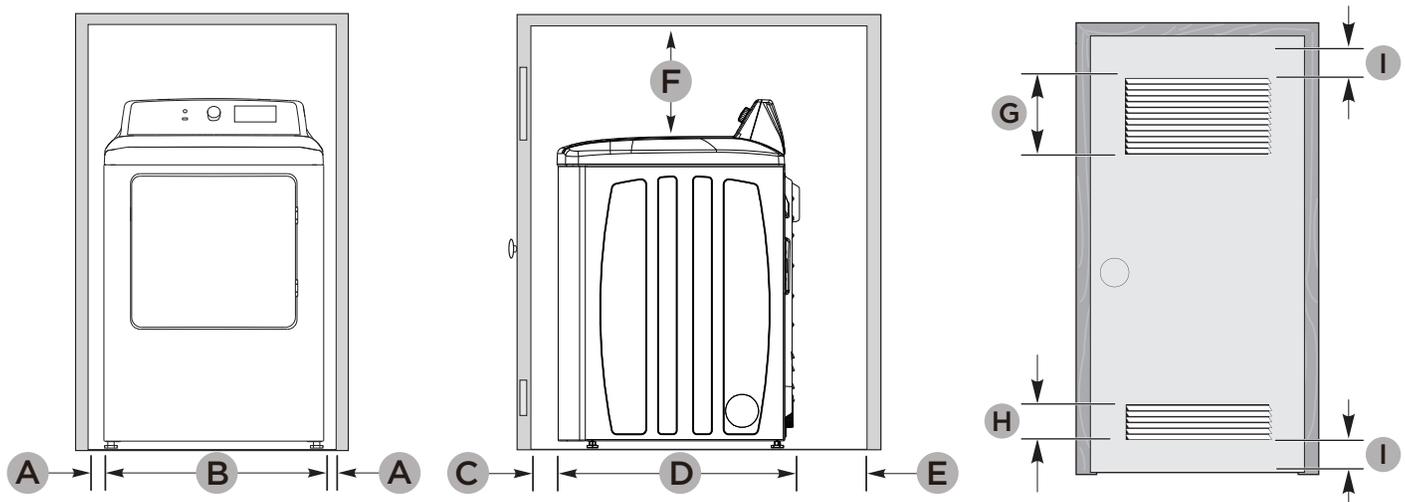

A (in / cm)	1 / 2.5
B (in / cm)	27 / 68.6
C (in / cm)	2 / 5.1

D (in / cm)	30.1 / 76.5
E (in / cm)	5 / 12.7
F (in / cm)	24 / 61

G (in ² / cm ²)	48 / 310
H (in ² / cm ²)	24 / 155
I (in / cm)	3 / 7.6

WARNING

- The dryer must be exhausted to the outside to reduce risk of fire when installed any place inside the house.
- No other fuel-burning appliance should be installed in the same closet as the dryer.