



SEDONA BY LYNX™ SERIES OUTDOOR KITCHEN REFRIGERATION

24" OUTDOOR REFRIGERATOR

(S24REF)



PRODUCT OVERVIEW

- Seriously Spacious—5.0 cu. ft. to load up all your favorites
- Custom Fit—field-reversible door
- Ample Access—24" wide refrigerator to keep everything chilled
- Generous Capacity—providing 5.0 cubic feet of space
- Sturdy Storage—3 heavy duty metal shelves
- Flawless Finish—has a seamless stainless steel cabinet and door
- Unparalleled Precision—sleek electric control panel
- Helpful Illumination—included interior lighting
- Dramatic Impact—stylish black interior
- Adaptable Configuration—suitable for built-in or freestanding use
- Precision Cooling—dial in your ideal cool (32°F - 50°F) with easy controls
- Tested Safety—UL certified for outdoor use



SHOWN: S24REF




OPEN VIEW





FOR A COMPLIMENTARY CUSTOM DESIGN FOR YOUR OUTDOOR KITCHEN, VISIT LYNXGRILLS.COM/DESIGN-CENTER

PRODUCT DIMENSIONS

ROUGH-IN OPENING DIMENSIONS			CABINET DIMENSIONS					
A	B	C	D	E	F	G	H	J
24-1/4" (61.6 cm)	34-1/8" to 35-1/8" (86.7 cm to 89.2 cm)	24" (61 cm)	24" (61 cm)	33-5/8" to 34-5/8" (85.4 cm to 88 cm)	21-1/4" (54 cm)	22-3/4" (57.8 cm)	24" (61 cm)	47-1/2" (120.7 cm)

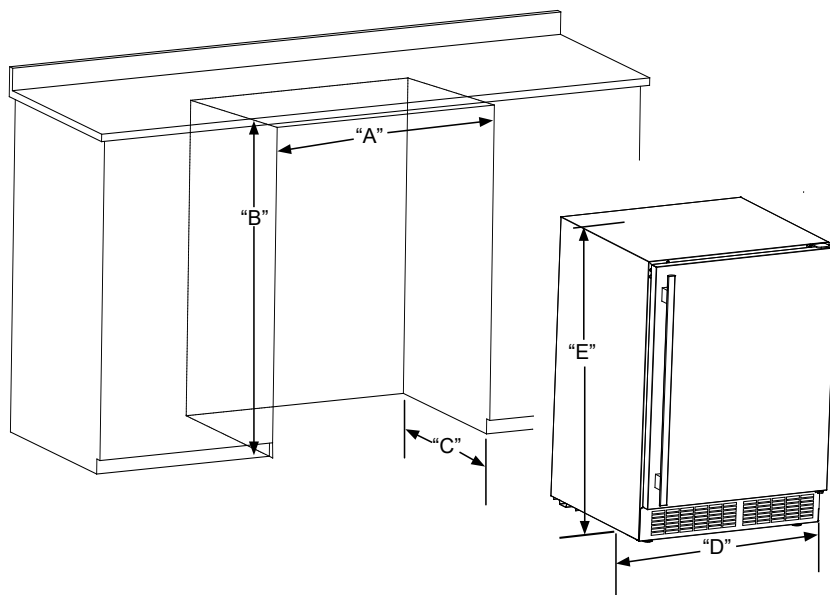

If necessary to gain clearance inside the rough-in opening a hole can be cut through the adjacent cabinet and the power cord routed through this hole to a power outlet. Another way to increase the available opening depth is to recess the power outlet into the rear wall to gain the thickness of the power cord plug. Not all recessed outlet boxes will work for this application as they are too narrow, but a recessed outlet box equivalent to Arlington #DVFR1W is recommended for this application.

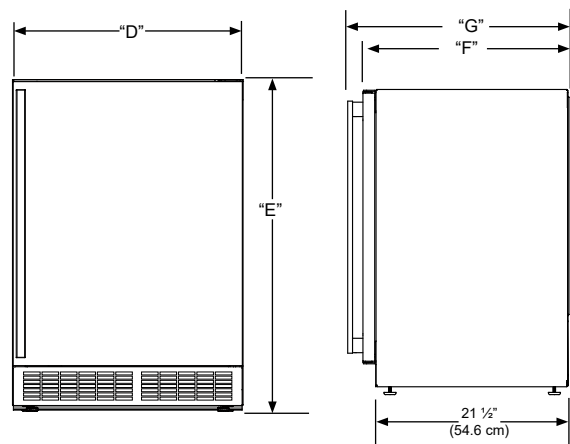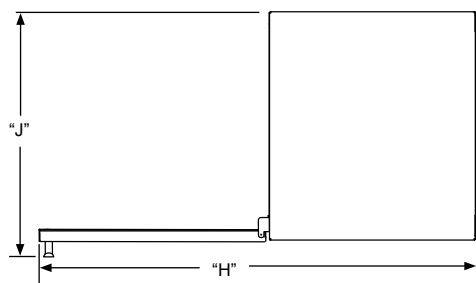

Minimum rough-in opening is required to be larger than the adjusted height of the cabinet.

A grounded 15-amp dedication circuit is required. Follow all local building codes when installing electrical and appliance.

