3-Series™ Control Card - 8 Relay Ports

The C3RY-8 is a 3-Series™ control card that provides eight isolated, low-voltage relay closures. Each relay is rated 1 Amp at 30 Volts. The card is designed to install in a control card expansion slot of a 3-Series Control System® model PRO3 or AV3[1], or 3-Series Card Interface model CEN-CI3-1 or CEN-CI3-3.

SPECIFICATIONS

Connectors

RELAY OUTPUT 1 – 8: (2) 8-pin 3.5mm detachable terminal blocks comprising (8) normally open, isolated relays;
Rated 1 Amp, 30 Volts AC/DC;
MOV arc suppression across contacts

Environmental

Temperature: 41° to 113°F (5° to 45°C)
Humidity: 10% to 90% RH (non-condensing)
Heat Dissipation: 10 BTU/Hr

Construction

Occupies one control card expansion slot of a 3-Series Control System® or 3-Series™ Card Interface
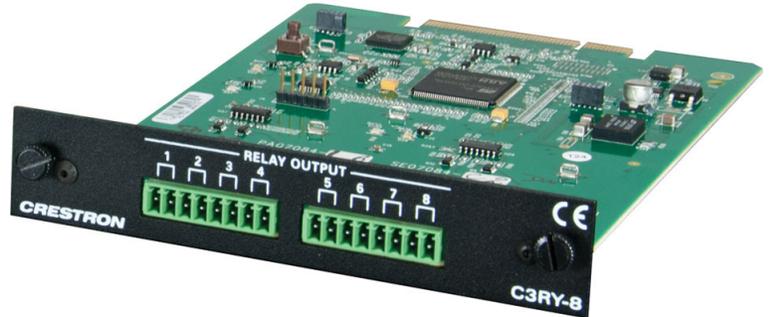
Weight

4.0 oz (114 g)

MODELS & ACCESSORIES

Available Models

C3RY-8: 3-Series™ Control Card - 8 Relay Ports

Notes:

1. AV3 requires CAGE3 Control Card Expansion Cage accessory to enable use of 3-Series control cards.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

6.98 in
(17.72 cm)

6.79 in
(17.25 cm)

RELAY OUTPUT
1 2 3 4   5 6 7 8

CRESTRON   C3RY-8

0.98 in
(2.49 cm)

5 in
(12.7 cm)