

UTTERMOST

ASSEMBLY INSTRUCTIONS


21412

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

We suggest a licensed professional electrician for installation

Installation Steps

1. Turn power off at fuse or circuit box before starting installation process.
2. Carefully unpack your new fixture and lay out all the parts on a clear surface.
3. Remove Lock ball and Hex nut from Crossbar assembly.
4. Adjust the Chain & wire to the desired length remove extra links and extra wire as needed. Thread wire through chain. Connect one end of the Decorative chain to the fixture loops with one Quick link. Connect the other end of the Decorative chain to the holes with the remaining Quick link.
5. Thread the Ground screw into the hole of the Crossbar. Secure the Crossbar assembly to the outlet box with the Outlet box screws.
6. The Lanyard is provided as a means to support the fixture from the outlet box while connecting the electrical wires. This enables the fixture to hang from the outlet box and your hands are free to make the wire connections. Hang the hook of the Lanyard on the Crossbar and ensure the hook is hung stably. Slowly release the fixture to make sure it is supported by the hook. Proceed to Step 7. Once wiring is complete, the Lanyard will push into the outlet box when the Canopy is Attached to the ceiling.
7. Make Wire connections with Wire Connector:
 - The Smooth side of Wire from Fixture to Black Wire from power source.
 - The Ribbed side of Wire from Fixture to White Wire from power source.
 - Attach the Ground Wire and house ground wire to the Crossbar with the green Ground screw.
8. Carefully tuck wires back into the outlet Box.

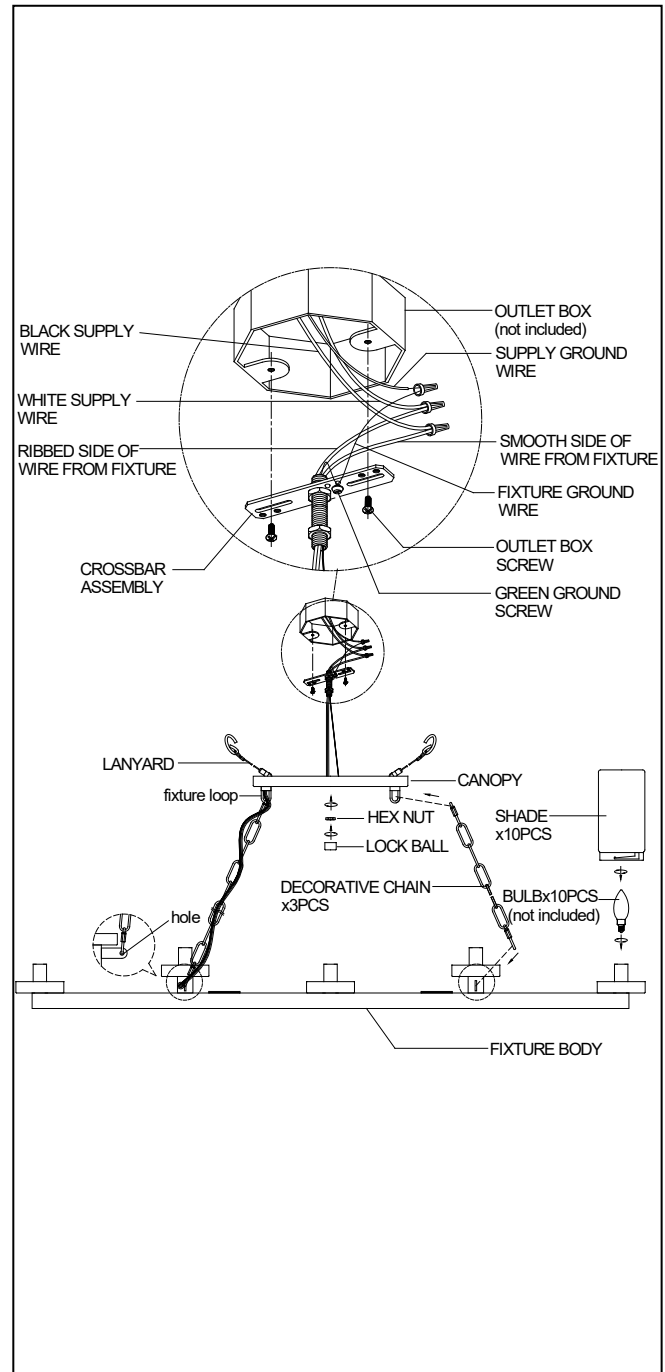

UTTERMOST

ASSEMBLY INSTRUCTIONS

21412

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

We suggest a licensed professional electrician for installation

Installation Steps

9. Attach the Canopy to the Crossbar assembly. Secure with the previously removed Hex nut.
Then, attached the Lock ball over the Canopy.
10. Install the light bulbs (Not Supplied) in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
11. Align the slots on the Shade to the studs on the cap on the Fixture body and twist the Shade until it is secure.