EQUILITY™ (Formerly LYNDON®)
SINGLE LEVER AND VESSEL FAUCETS



- Cast brass spout
- Ceramic disc valve cartridge
- 3/8" compression braided, stainless steel flexible supply hose
- Lead Free—faucet contains ≤0.25% total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/ CSA B125.1, NSF 61/Section 9

EPA WaterSense™ Certified

Certified Compliant with ≤0.25% Weighted Average Lead Content Regulations

CEC and CALGreen® Compliant

AVAILABLE FINISHES	FINISH CODE
Polished Chrome	100
Brushed Nickel	144
Matte Black	243

DESCRIPTION	PRODUCT NUMBER
1.5 gpm (5.7 L/min)	
Vessel Faucet	★ D35109150.144
1.2 gpm (4.5 L/min)	
Single Lever Faucet	D3510910C.XXX
Single Lever Faucet with Grid Drain	D35109152.XXX
Vessel Faucet	D3510915C.XXX
Vessel Faucet with Grid Drain	D35109151.XXX

ROUGH-IN DIAGRAM
SHOWN ON NEXT PAGE

★DISCONTINUED. Available while supplies last.


CALGreen® is a registered trademark of California Building Standards Commission.

Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.


©2018 AS America Inc.

EQUILITY™ (Formerly LYNDON®)
SINGLE LEVER AND VESSEL FAUCETS

D3510910C

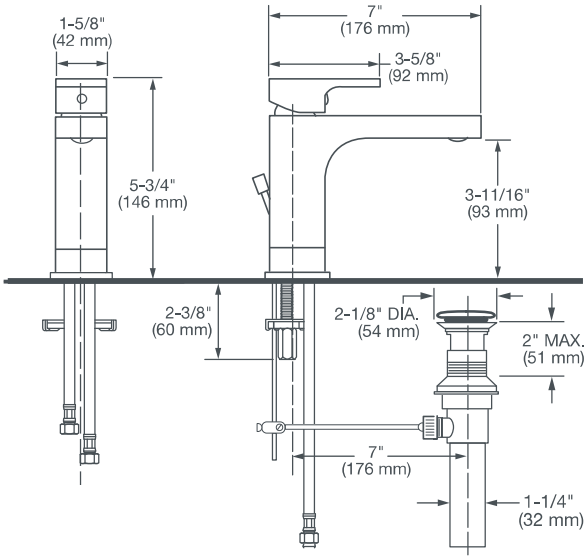


D35109150
D3510915C

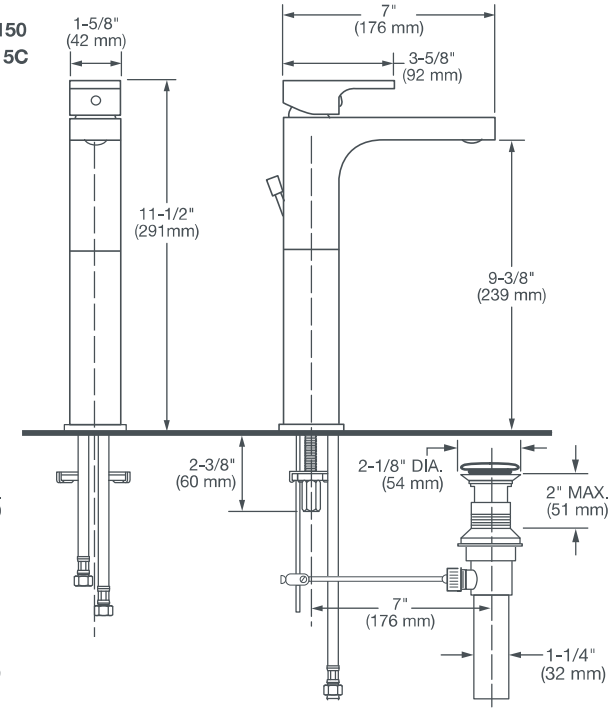


NOTE: MOUNTING HOLES ARE 1-3/8" D. (35 mm)

D35109152

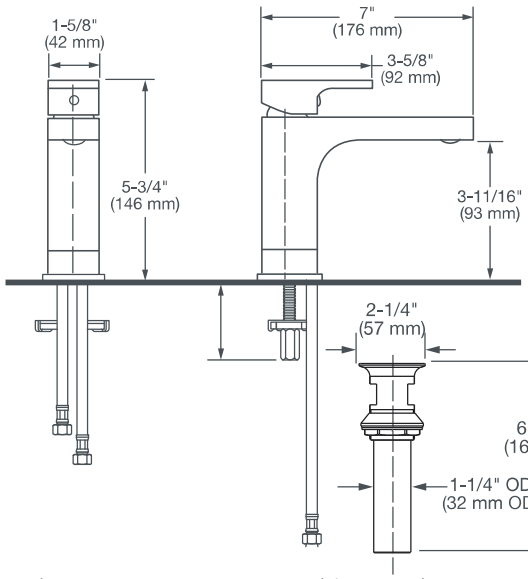

D35109151

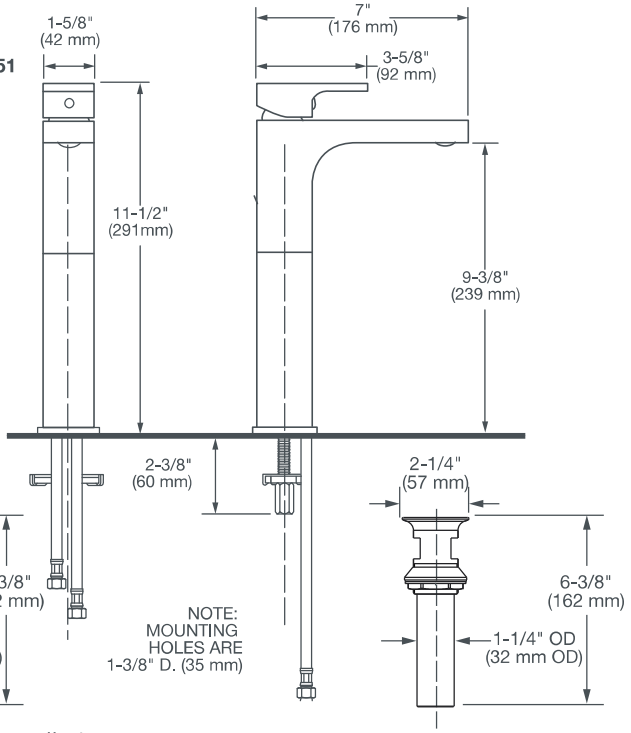

IMPORTANT: These measurements are subject to change or cancellation.
No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL

©2018 AS America Inc.