



Product Specifications

Style Number VV800

Construction Solid Polymer Core


Edge Profile Enhanced Integrated Bevel

Nominal Dimensions 7" wide, 48" long

	US Units	Metric Units
Actual Product Width	7.13"	18 cm
Actual Product Length	49"	124 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.236"	6 mm
Core Thickness	0.197"	5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment	0.039"	1 mm
Thickness		
Installation Methods	Floating or Direct Glue	2
Profile	Angle/Tap	
Country of Origin	Imported	
Dookoging		
Packaging		
Area per Box	16.97 sq ft	2 sq m
Pieces per Box	7 pcs	

36.2 lbs

70 boxes

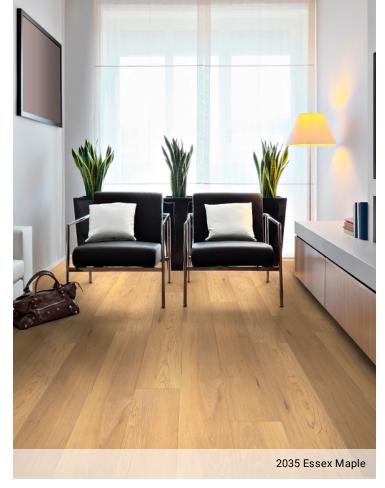

Colors

Weight per Box

Boxes per Pallet



16.42 kg

PP HD INTEGR 7"



Performance

Static Load (ASTM F970) **Passes** Residual Indentation (ASTM F1914) **Passes** Resistance to Heat (ASTM F1514) Passes Resistance to Light (ASTM F1515) **Passes** Resistance to Chemicals (ASTM F925) **Passes** Smoke Density (ASTM E662) **Passes** Radiant Panel (ASTM E648) Passes, Class I Slip Resistance (ASTM D2047) ADA compliant


Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof


15 Year Light Commercial

Coordinating Trim

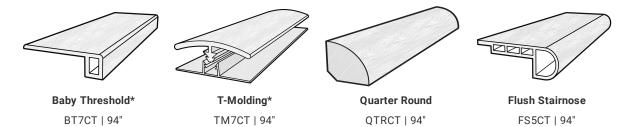

*Packaged with molding track

Coordinating Metal Trim

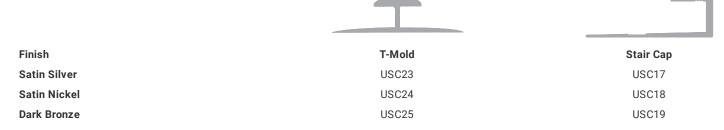

Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

PP HD INTEGR 7"



Stair Tread

Stair Tread

03Z70 | 48"