Advanced Clean® 100 SpaLet® Toilet

BARRIER FREE

Advanced Clean® 100 SpaLet® Toilet

❑ **297AA204-291 -** Advanced Clean 100 combo

- Two independent water sprays for front and back cleansing
- The dual water spray system is self cleansing. Each nozzle is rinsed with water before and after each use.
- Instant heating provides unlimited warm water on demand
- Automatic open/slow-close lid and seamless seat
- The warm air dryer has 3 air temperatures (Low, Medium, High: 104°F to 131°F)
- Adjustable, automatic flush setting (off, 2, 6, 10, 15 second delay options)
- The heated seat function has 5 levels: 3 preset and 2 additional customer settings. Temperature can be easily adjusted for comfort
- The massage feature alternates between strong and mild sprays, creating a pulsating effect that indulges the user. Posterior spray only.
- 5 Nozzle positions to personalize your cleansing experience
- Room Refresh and Air Shield technology to deodorize the air in and around the bowl
- The auto deodorizer uses active charcoal to reduce the odors in the bowl. Operation begins once the user sits down on the seat and continues for 5 seconds after the user stands up
- Night light for soothing guide at night.
- Vitreous China compact elongated bowl with low height design
- One-touch power save (8 hours)
- Triple Vortex Flush: 2 powerful water streams plus the siphon jet
- External manual flush button for power outages
- In-line easy to access water strainer
- WaterSense® Dual Flush 1.32 - 0.92 gpf/4.9 - 3.4 Lpf
- Smart remote control included
- Toilet weighs 34 kg/75 lbs (Seat unit: 12 kg/26>5 lbs, toilet bowl: 22 kg/48.5 lbs)

Nominal Dimensions:
14-3/4" x 25-1/16" x 20-9/16"
(375 x 650 x 523 mm)

Components:
3970A101-291 - Advanced Clean 100 Bowl
8017A60GRC-291 - Advanced Clean 100 Seat



SEE REVERSE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

To Be Specified:
❑ Color: ❑ 291 Alabaster White

Compliance Certifications -
Meets or Exceeds the Following Specifications:
ASME A112.19.2 / CSA B45.1,
ASME A112.4.2 / CSA B45.16, UL 1431,
CSA C22.2 No. 68-14 Update No. 3,
CSA C22.2 No. 64-14
EPA WaterSense® Certified

Rated Power Source : 120 VAC, 60 Hz
Rated Power Consumption : 1,300 W
Power Cord Effective Length : 39-3/8" (1.0m)


Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for Accessible and Usable Building Facilities-Check Local Codes.


EPA WaterSense® Certified | Dual Nozzle | Instant Heating | Auto Open Close Seat


© 2019 AS America Inc.


Advanced Clean® 100 SpaLet® Toilet

BARRIER FREE

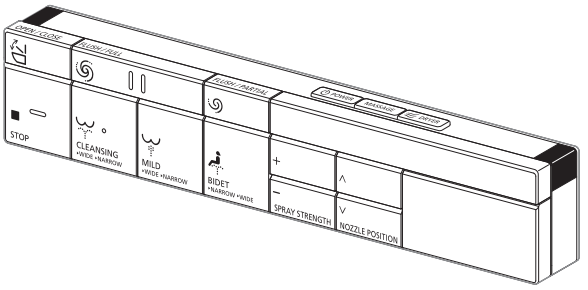

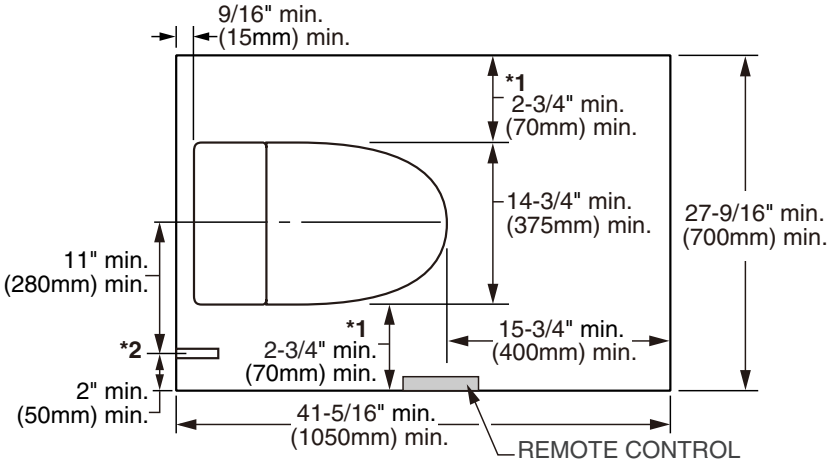

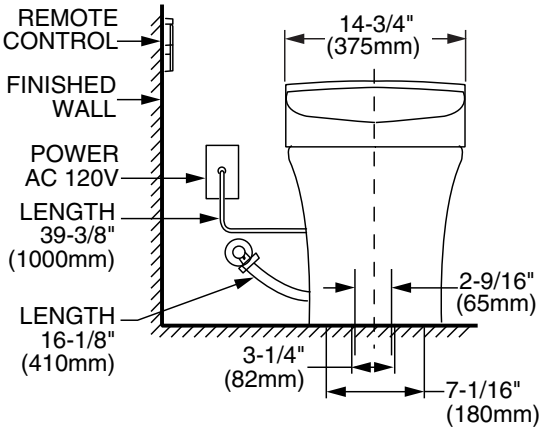

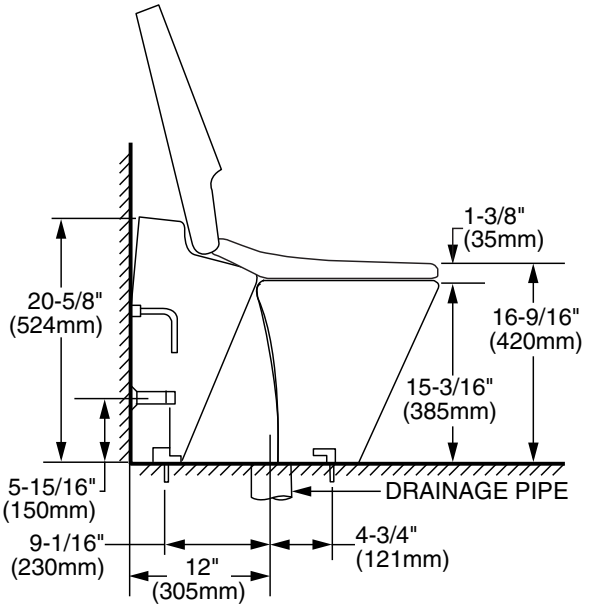

NOTES: This bidet toilet is designed to rough-in at a minimum dimension of 12" (305 mm) from finished wall to C/L of outlet.

Includes flex supply with integral shutoff valve, seat and bolt caps.

Dimensions shown for location of supply is suggested.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2019 AS America Inc.