

## 27-INCH SINGLE WALL OVEN

## HWO127 | HERITAGE COLLECTION



## **AVAILABLE MODELS**

HWO127ES

HWO127FC

	with Epicure Style Handle	
HWO127PS	Heritage 27" Single Wall Oven - Stainless Steel with Pro Style Handle	
HWO127FS	Heritage 27" Single Wall Oven - Stainless Steel with Flush Handle	
HWO127EB	Heritage 27" Single Wall Oven - Black Glass with Epicure Style Black Handle	
HWO127PB	Heritage 27" Single Wall Oven - Black Glass with Pro Style Stainless Steel Handle	
HWO127EC	Heritage 27" Single Wall Oven - DacorMatch Color System with Epicure Style Color Matching Handle	
HWO127PC	Heritage 27" Single Wall Oven - DacorMatch Color System with Pro Style Color Matching Handle (End Caps in Stainless Steel)	

Heritage 27" Single Wall Oven - DacorMatch Color System with Flush Handle

Heritage 27" Single Wall Oven - Stainless Steel


# FEATURES & BENEFITS

- → Four-Part Pure Convection System provides superior heat distribution, and eliminates flavor transfer.
- RapidHeat™ Broil Element uses an 8-pass radiant ribbon element to broil food quickly and evenly.
- → 4.5 cu. ft. oven capacity.
- → 7 rack positions for multi-rack cooking.
- → SoftShut<sup>™</sup> doors.
- → GlideRacks
- → Self-Cleaning mode.
- Sabbath mode.

ACCESSORIES (INCLUDED)	
GLIDERACK™	2
STANDARD RACK	1
TEMPERATURE PROBE	1
ACCESSORIES (OPTIONAL)	
COOKIE SHEETS (SET OF 3)	ACSRO273
BROIL-ROASTING PAN SET	AORPVR
PIZZA STONE	ABS16
GENERAL PROPERTIES	
COOKING MODES	PURE CONVECTION™ CONVECTION BAKE CONVECTION BROIL CONVECTION ROAST BAKE BROIL
ADDITIONAL FEATURES	
CLEANING TYPE	SELF CLEAN & GREENCLEAN™
RACK POSITIONS	7
CONVECTION TYPE	PURE CONVECTION™
LIGHTING	HALOGEN
OVEN PERFORMANCE	
BAKE ELEMENT	3,000W - 8 PASS
BROIL ELEMENT	3,500W - 8 PASS
CONVECTION ELEMENT	2,200W
CONTROL FEATURES	
DELAY TIME COOKING	YES
TIMED COOKING	YES
AUTOMATIC HOLD	YES
10-KEY PAD	YES
CLOCK	YES
TWO TIMERS	YES
SABBATH MODE	YES
CHILD LOCK	YES
ADDITIONAL MODES	
KEEP WARM	YES
PROOF DEHYDRATE	YES
TEMPERATURE PROBE	YES YES
TECHNICAL DETAILS	
CIRCUIT BREAKER (A)	30
VOLTS (V)	240
FREQUENCY (HZ)	60
ENERGY SOURCE	ELECTRIC
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	27 3/4" X 26 7/8" X 24"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	26 3/4" X 25 5/8 X 24"
OVEN CAPACITY (CUBIC FEET)	4.5
WARRANTY	
LIMITED, PARTS AND LABOR	1 YEAR





APPLIANCE DIMENSIONS			
27"			
А	26 7/8" (68.3CM)	WIDTH (FACE)	
В	25 1/2" (64.8CM)	WIDTH (CHASSIS)	
С	27 3/4" (70.5 CM)	HEIGHT (OVERALL)	
D	26 5/8" (67.6 CM)	HEIGHT (CHASSIS)	
Е	11/8" (2.9 CM)	TOP OF CHASSIS TO TOP OF CONTROL PANEL	
F	6 1/2" (16.5 CM)	UTILITY CUTOUT (WIDTH)	
G	5" (12.7 CM)	UTILITY CUTOUT (HEIGHT)	
Н	7 7/8" (20.0 M)	UTILITY CUTOUT (DEPTH)	
J	11/8" (3.2 CM)	CONTROL PANEL (DEPTH)	
K	23 5/8" (60 CM)	DEPTH (CHASSIS)	




## INSTALLATION CUTOUT DIMENSIONS INSTALL DIMENSION Ν 27" (68.6CM) MINIMUM MIN 25 5/8" (65.1CM) RECOMMENDED MAX 26 1/8" (66.4CM) MIN. 26 3/4" (67.9 CM) RECOMMENDED R MAX. 27 1/2" (69.9 CM)

### WALL CABINET

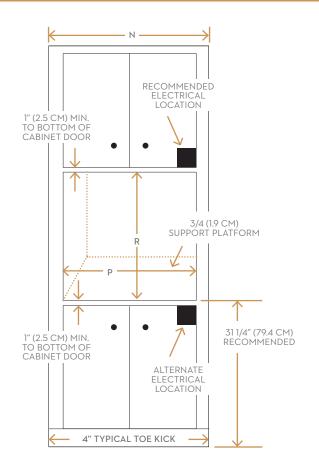



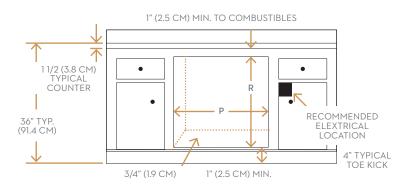

All tolerances: ±/- 1/16 (+/-1.6MM) unless otherwise stated.