

Helpers needed to assemble: 2

Estimate time frame to assemble: 10 minutes

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts, which may come loose inside the carton during shipment. Please identify and count all parts and compare with the HARDWARE LIST below.







Caution: Please read instructions carefully before unpacking assembly parts. Sharp, exposed staples can cause injury, therefore, for your protection, please remove any exposed staples used in packing.


Step 1: Turn the chair up and place the leg underneath to connect. Place 1pc flat Washer (3) and 1pc spring washer(2) on the bolt 5/16" x 2" 3/8 (1) in the as shown to tighten the leg. Make sure the plate aligns with the washers and bolt holes on the seat.

Step 2: Repeat step 1 for the remaining three legs.

Step 3: Flip the chair over upright as seen. Test the chair is firmly on the ground and the seat does not wiggle.

Step 4: Sit and enjoy your new chair.

| # | Picture | Description | Q'TY |
|---|---|----------------------------|------|
| A |  | Seat frame | 1 |
| B |  | Frame leg | 4 |
| 1 |  | Ø 5/16" x 2" 3/8 Bolts | 8 |
| 2 |  | Ø 1/4" x Ø12 Spring washer | 8 |
| 3 |  | Ø1/4"x Ø19 Flat washer | 8 |
| 4 |  | Allen key | 1 |

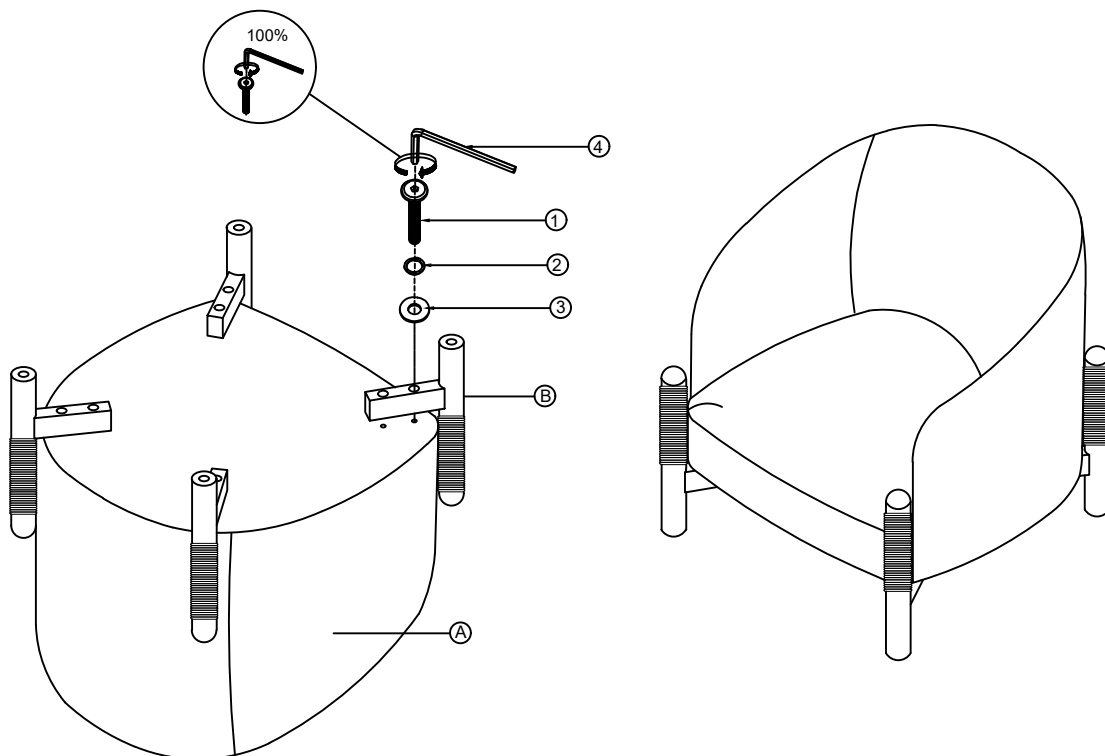

* Retain the Allen key. For regular maintenance, we recommend tightening all screws every three months to ensure continued stability and performance.

1. We recommend to assemble this product with the assistance of another person. This will provide a smooth assembly process, and can help eliminate self injuries or damage to the product during assembly.
2. Please do not over tighten screws or bolts until the assembly is completed.
3. Please put all parts on a smooth, flat surface before assembly, and carefully follow the assembly steps to assemble your newly purchased product correctly and efficiently.