



Culinary warming drawer
Gaggeneau Expressive series
GW 083

GW 083 790

Fully integrated.
 Not push-to-open, requires handle.
 Custom-panel ready.
 Width 30" (76 cm),
 Height 8 7/16" (21.5 cm).

Installation accessories

Part No. 12039458
 Bracket (set of 2) anti-tilt.

Highlights

- Integrable in 8 1/4" (21 cm) high cut out.
- Bright interior lighting.
- Soft-close closing system.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 85 °F to 180 °F.
- Also for low-temperature cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

Heating methods

Preheating of small beverage containers/cups.
 Warming cookware/plates.
 Keeping meals warm.
 Low-temperature cooking.
 Direct temperature control.
 Personalization function via Home Connect®.
 16 additional programs via Home Connect®.

Operation

Touch key operation.

Features

Oven cavity size 1.7 cu.ft. (47 liters).
 Volume capacity: Dinner service for 10 people including ø 10 3/8" (27 cm) plates and soup bowls, additional bowls and a serving dish depending on size.
 Capacity load max. 55 lbs. (25 kg).
 Usable interior dimensions W 27 5/8" x H 6 3/16" x D 15 15/16" (701 mm x 166 mm x 405 mm).
 Heating system for even heat distribution and stable cavity temperature.
 Glass bottom made of safety glass.

Selected digital services


(Gaggeneau Home Connect®)
 Additional programs and recipes.
 Remote control and monitoring.
 Timing function.

Planning notes

Plan the cut out without back wall.
 Installation directly above the drawer without intermediate shelf.
 Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.
 Front weight up to 6.6 lbs. (3 kg).
 Necessary lateral gap between appliance front and cabinet panel of min. 3/16" (5 mm)
 Built-in under countertop or in single cut out.
 If the culinary warming drawer is built-in under a countertop or in a single cut out by itself, please add an additional 3/32" (2 mm) clearance in the overall planning height. Additionally, please order Part No. 12039458 Anti-tilting bracket.
 The electrical box must be accessible and located outside the built-in cut out.
 The electrical box can be planned behind the appliance.

Rating

Total rating: 820 W (120 V).
 Total amps: 6.8 A.
 Minimum fuse protection: 10 A.
 120 V, 60 Hz.
 Plug (NEMA 5-15P), 68 7/8" cable.

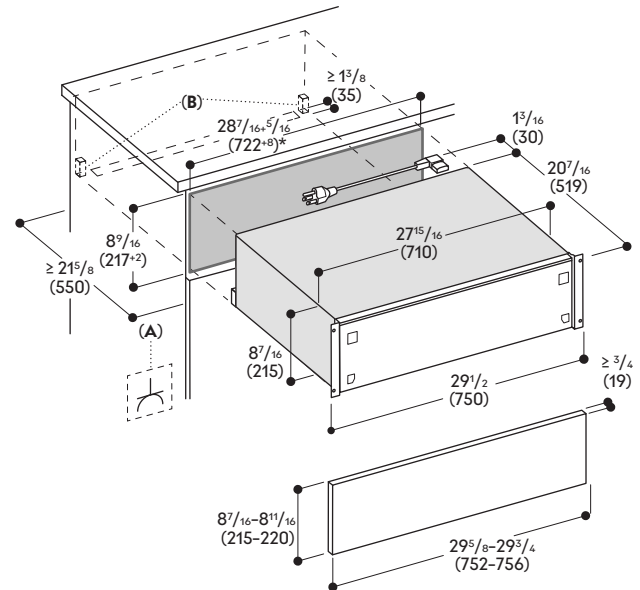

A: Accessible electrical connection

B: Anti-tilting

* The width tolerance as shown in the drawing indicated by the + 5/16" (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between 5/8" - 13/16" (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.