

DAS 2920
Built-in ventilation hood
with EasySwitch controls for convenient operation




- Classic design – stainless-steel panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495857 / Material number: 11878500 / Old Material Number: 28S2920SUSA

| | |
|--|-----------------|
| Construction type | |
| Built-in ventilation hood | • |
| Operating modes | |
| Recirculated mode | Convertible |
| Recirculation conversion kit (order separately) | DUU 151 |
| Design | |
| Color | Stainless steel |
| Control panel | |
| Electronic controls | • |
| Touch controls on glass | • |
| Cleaning convenience | |
| Easy-to-clean canopy interior – CleanCover | • |
| Filter system | |
| Number of dishwasher-safe stainless-steel grease filters | 1 |
| Lighting | |
| LED | • |
| Number x W | 1 x 3,0 W |
| Light intensity in lx | 300 lx |
| Color temperature in K | 3500 Kelvin |
| Blower | |
| Dual-action blower | • |
| AC motor | • |
| Safety | |
| Safety shut-off | • |
| Technical data | |
| Canopy width in in.(mm) | 35 3/8 (896) |
| Canopy height in in.(mm) | 1 1/2 (36) |
| Canopy depth in in.(mm) | 10 3/4 (273) |
| Net weight in lbs. (kg) | 36 (16.0) |
| Length of electrical wire in ft (m) | 2 (0.8) |
| Standard plug fitted | • |
| Minimum distance above electric cooktops in in. (mm) | 24 1/8 (610) |
| Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm | 26 (660) |
| Total connected load in kW | 0.35 |
| Voltage in V | 120 |
| Fuse rating in A | 15 |
| Number of phases | 1 |
| Frequency in Hz | 60 |
| Installation notes | |
| Vent connection at top | • |
| Accessories supplied | |
| Non-return flap | • |
| Optional accessories | |
| OdorFree charcoal filter | Nein |

DAS 2920 Built-in ventilation hood with EasySwitch controls for convenient operation

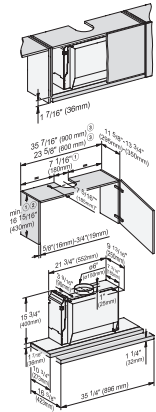

DAS2920, DAS4920, drawing – US

1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts., 2) Exhaust air, recirculation with DUU 150 conversion kit., 3) Installation is also possible in a 600 mm wide cabinet., , *In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.