


L7S15®



RECOMMENDED AMP RMS POWER .

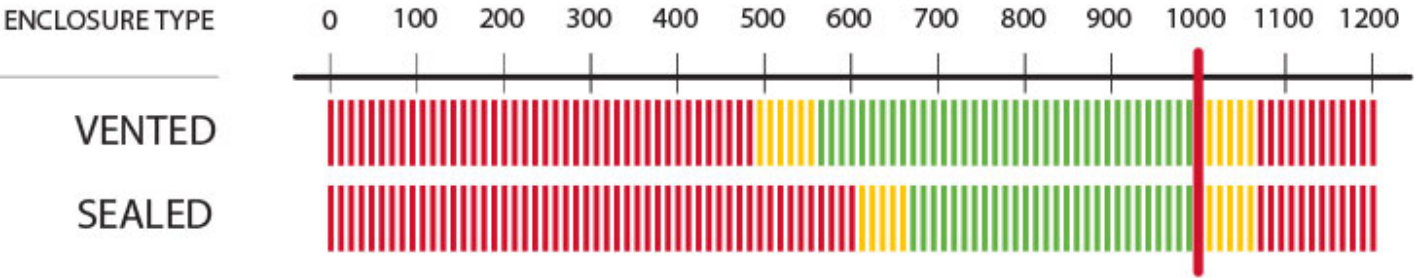

Specifications

Thiele/Small Parameters



44L7S152 T/S Parameters PDF

(/app/products/caraudio/subs/solobaricl7s/solo_baric_l7s_15_2_ohm_subwoofer/files/44L7S152.pdf)

Size (IN.,CM)

15, 38.1

Impedance (OHMS)

2 DVC

Recommended Amplifier Power (watts RMS)

1000

Peak Power (watts, per ANSI/CTA-2031-A)

2000

Sensitivity (dB 1w/1m)

89.4

Frequency Response (Hz)

18-100

Mounting Depth (IN.,CM)

8-11/16, 22.1

Mounting Cutout, Square (IN.,CM)

13-3/4, 34.9

Min Rec Sealed Box Volume (CU. FT., Liters)

2.0, 56.64

Max Rec Sealed Box Volume (CU. FT., Liters)

6.0, 169.9

Min Rec Vented Box Volume (CU. Ft., Liters)**

3.0, 85.0

Max Rec Vented Box Volume (CU. Ft., Liters)**

6.0, 169.9

What's in the box?

one 15-inch subwoofer, one owner's manual, two stickers

*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

**Port Volume Excluded.

Due to continual development, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

You may also like these related products*

**08GL715**

15" Square Grille

(08GL715)