

# T24UR920LS

## UNDER-COUNTER GLASS DOOR REFRIGERATOR

PROFESSIONAL SERIES HANDLE – LEFT HINGED



Also Available:

T24UR920RS – Right Hinged with Professional Series Handle  
T24UR910LS – Left Hinged with Masterpiece® Series Handle  
T24UR910RS – Right Hinged with Masterpiece® Series Handle  
T24UR900LP – Left Hinged Custom Panel-Ready  
T24UR900RP – Right Hinged Custom Panel-Ready

### FEATURES & BENEFITS

- Customizable cooling modes – Fridge, Pantry and Bar
- SoftClose® door hinges for ultra-smooth closing
- Fully adjustable tempered glass shelves
- Door Open Alarm
- LED theater Lighting
- Sabbath Mode
- Touch electronic controls for temperature management

### GENERAL PROPERTIES

|                               |              |
|-------------------------------|--------------|
| SoftClose® Door               | Yes          |
| Lighting                      | LED Lighting |
| Tempered Glass Shelves        | 4            |
| Door Open Alarm               | Yes          |
| Quick Chill                   | Yes          |
| Touch Electronic Controls     | Yes          |
| STAR-K Certified Sabbath Mode | Yes          |

### CAPACITY

|                          |             |
|--------------------------|-------------|
| Total Capacity (cu. ft.) | 5.1 cu. ft. |
|--------------------------|-------------|

### TEMPERATURE RANGES

|                       |                                                                 |
|-----------------------|-----------------------------------------------------------------|
| Refrigerator          | 33°F (0.5°C) to 58°F (14.5°C)                                   |
| Pre-Set Cooling Modes | Refrigerator 37°F (3°C)<br>Pantry 53°F (12°C)<br>Bar 34°F (1°C) |
| Quick Chill           | Refrigerator 33°F (0.5°C) for approximately 24 hours            |

### TECHNICAL DETAILS

|                         |             |
|-------------------------|-------------|
| Watts (W)               | 150 W       |
| Current (A)             | 15 Amp      |
| Volts (V)               | 115 V       |
| Frequency (Hz)          | 60 Hz       |
| Power Cord Length (in.) | 60"         |
| Plug Type               | 120V 3-Wire |

### DIMENSIONS & WEIGHT

|                                        |                           |
|----------------------------------------|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 34 1/4" * x 23 7/8" x 24" |
| Required Cutout Size (H x W x D) (in.) | 35" x 24 3/16" x 24 9/16" |
| Net / Gross Weight (lbs.)              | 190 / 205 lbs.            |

### EFFICIENCY

|                           |         |
|---------------------------|---------|
| ENERGY STAR® Qualified    | Yes     |
| Annual Energy Consumption | 274 kWh |

### WARRANTY

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

2 Year

Limited Warranty for Sealed Refrigeration System\*; Parts and Labor

3rd to 6th Year

Limited Warranty for Sealed Refrigeration System\*; Parts Only

7th to 12th Year

\*Height adjustable + 1/2" (13 mm) with legs fully extended

\*\*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing


# T24UR920LS

## UNDER-COUNTER GLASS DOOR REFRIGERATOR


### PROFESSIONAL SERIES HANDLE – LEFT HINGED




#### GLASS DOOR REFRIGERATOR PRODUCT DIMENSIONS

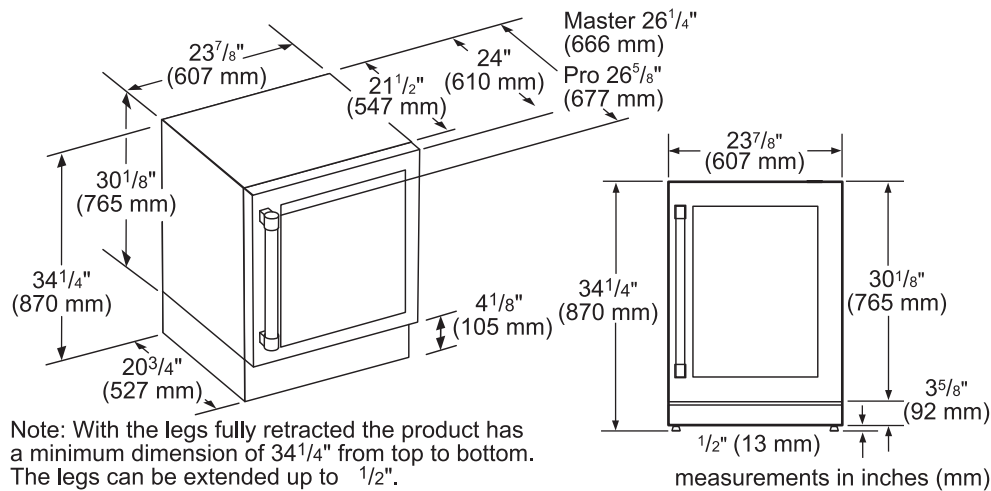


#### GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS

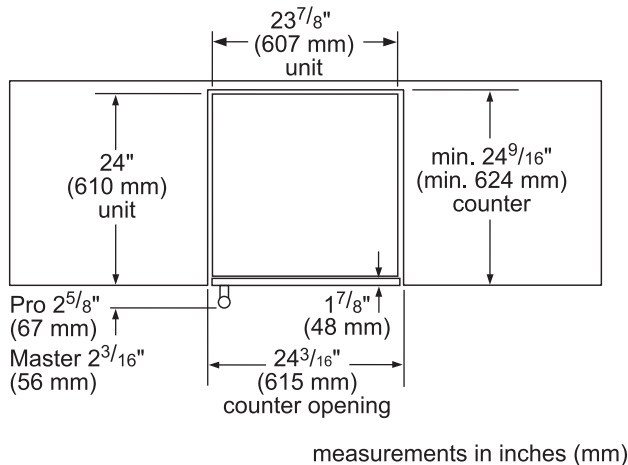

Frontal view

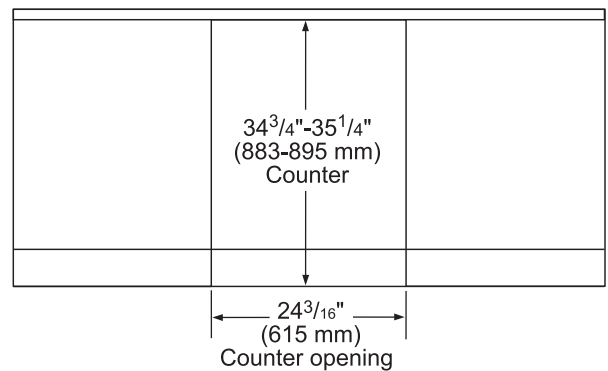

#### GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS & ELECTRICAL LOCATION

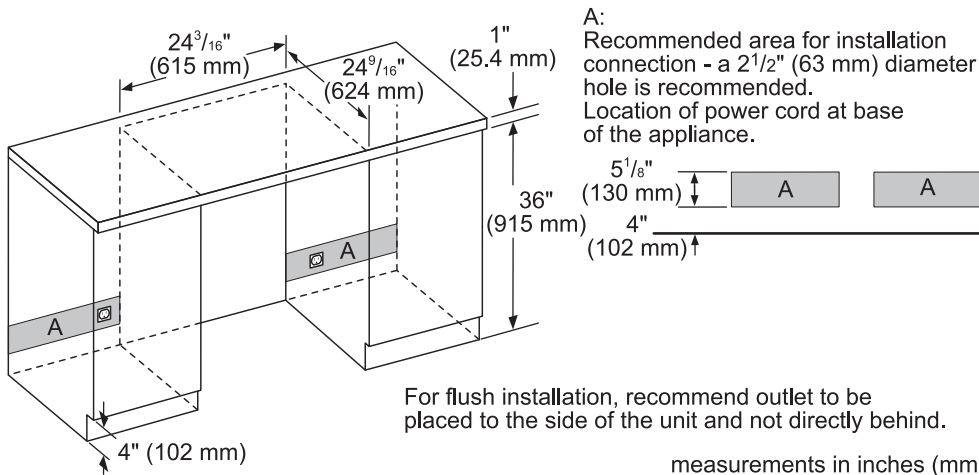


# T24UR920LS

## UNDER-COUNTER GLASS DOOR REFRIGERATOR


### PROFESSIONAL SERIES HANDLE – LEFT HINGED



#### GLASS DOOR REFRIGERATOR CUTOUT & DOOR SWING DIMENSIONS

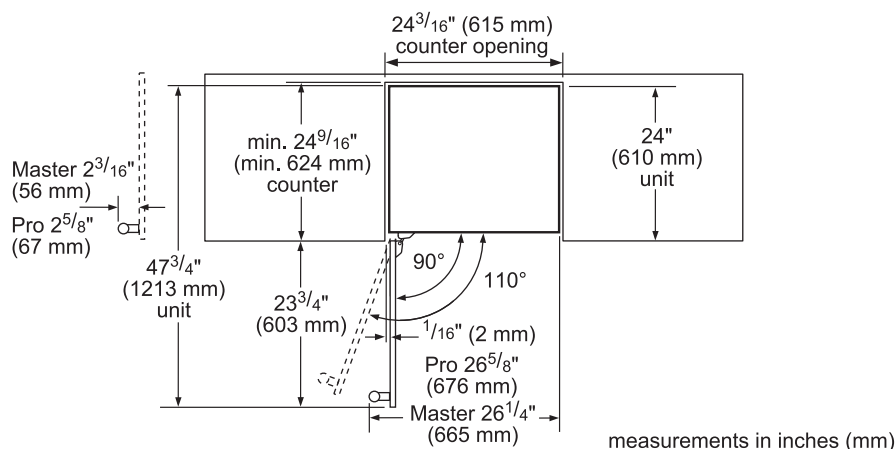

#### GLASS DOOR REFRIGERATOR SIDE-BY-SIDE INSTALLATION

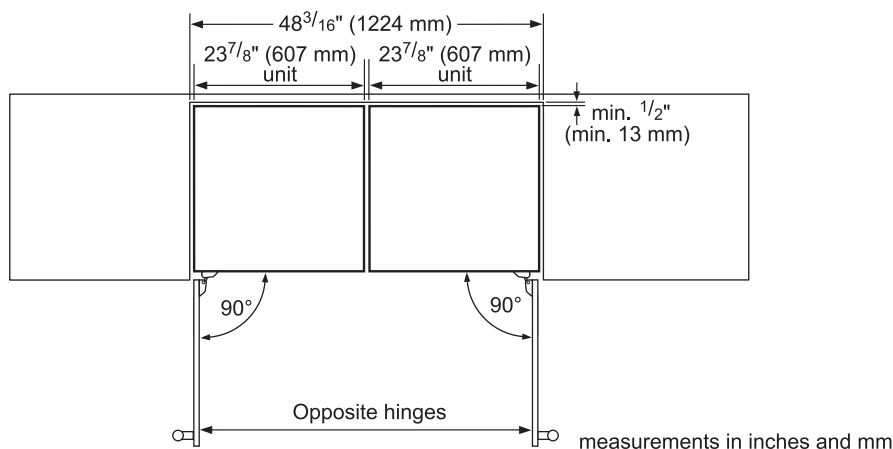

#### ACCESSORIES (OPTIONAL)

##### HANDLES

NOTE: Choose one handle for each glass door model, choose 2 handles for each double drawer model.



PR22HNDL20  
22-Inch Professional Series Handle

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.