

# ORISTA

PWLORX36SS, PWLORX48SS

## Don's Appliances

Exceptional Brands and Service Since 1971





Compatible with 600 and 1200 CFM blower, this model is capable of effectively removing smoke, steam, and cooking odors from your kitchen.

Designed with sharp lines, and a tempered shape it comes with stainless front and side rim, decorative banding and rivets to give a unique and elegant look to your kitchen.

### MOUNTING HEIGHT RANGE

↓ ↑   ↓ ↑  
≥ 24" ≥ 30"

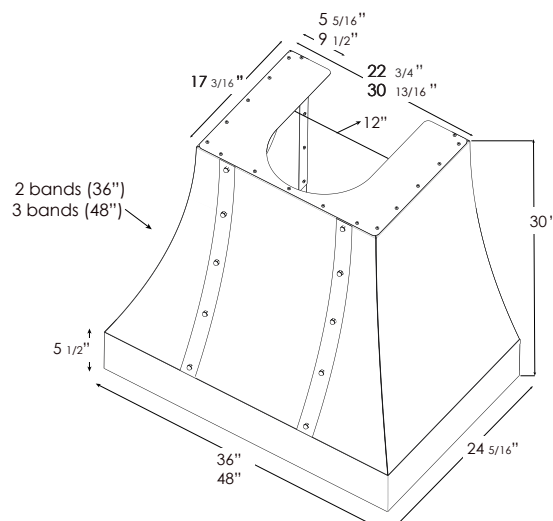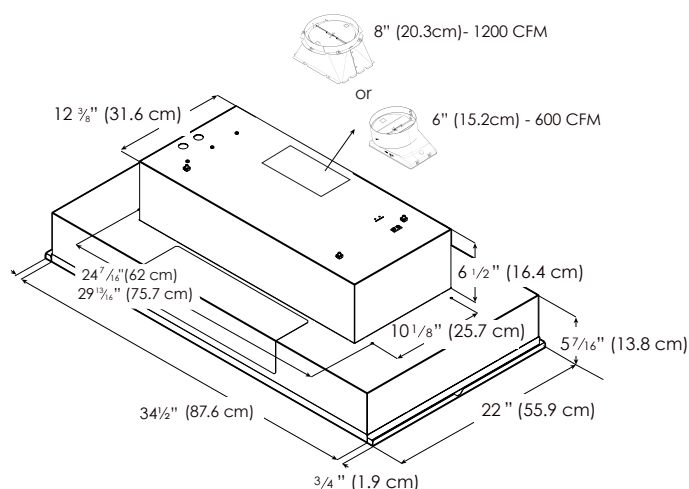

## SPECIFICATIONS

<b>Width:</b>	36" Unit	48" Unit
<b>Model:</b>	PWLORX36SS	PWLORX48SS
<b>Dimensions:</b>	36"W x 24"D x 30"H	48"W x 24"D x 30"H
<b>Blower Type (sold separately):</b>	Requires purchase of insert hood PINAR634SS (600 CFM) PINAR134S4 (1200 CFM)	Requires purchase of insert hood PINAR146SS (1200 CFM)
<b>Blower Performance:**</b>		
<b>Power (CFM):</b>	600 CFM / 1200 CFM	1200 CFM
<b>Noise (sones):</b>	1.5 - 7 Sones / 2.0 - 8.5 Sones	2.0 - 8.5 Sones
<b>Finish:</b>	Stainless Steel with Stainless Steel Front and Side Rim, 2 Bands and Rivets	Stainless Steel with Stainless Steel Front and Side Rim, 3 Bands and Rivets
<b>Controls:</b>	Fully Retractable Rotating Knobs with White Backlighting	Fully Retractable Rotating Knobs with White Backlighting
<b>Grease Filter:</b>	(2) Grease Collecting Stainless Steel Baffle	(3) Grease Collecting Stainless Steel Baffle
<b>Installation:</b>	Easy mounting with top & rear outlet capability	Easy mounting with top & rear outlet capability
<b>ACCESSORIES:</b>		
<b>Duct cover extension:</b>	ACC0182781 (36" width x 6" tall) ACC0182782 (36" width x 18" tall)	ACC0182783 (48" width x 6" tall) ACC0182784 (48" width x 18" tall)
<b>Other compatible KITS:</b>	Compatible with PINAR634SS/PINAR134S4 kits.	Compatible with PINAR146SS kits.
<b>WARRANTY:</b>	Two (2) years parts & in-home labor	

## PLUS FEATURES

**Easy Installation** - Hood Installation can be done in a few steps without ladders, or extra costs on specialized duct transitions. With the rear outlet, no duct covers are needed.

**Flexible Outlet Install** - The hood can be installed with a top outlet to the ceiling or a rear outlet to the rear wall for a more flexible configuration.

**Fine precision** - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.

**Superior performance** - High performance ventilation with blowers ranging from 600 to 1200 CFM.

**Thermal barrier** - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.

\*The product images shown are for illustration purposes only and may not be an exact representation of the product.

\*\*CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

