





Jennair® 36" NOIR™ Dual-Fuel Professional-Style Range with Chrome-Infused Griddle and Steam Assist

JDSP536HM

Available Finishes/Colours

 JDSP536HL
Stainless Steel

 JDSP536HM
Floating Glass Black

Dimensions		Details	
Depth	29.81	Cooktop Surface Material	Porcelain Coated Steel
Height	36.0	Convection Functions	Bake; Broil; Roast
Width	35.88	Convection Element Type	Dual Fan

Details		Details	
Convection Element Power Watts	2800	Oven Control Knob Type	Metal
Oven Control Knob Color	Stainless Steel	Broiler Location	Top of Oven
Oven Cleaning Type	Self-Clean	Broiler Element Power	1667W
Number Of Rack Guides	5	Bake Element Power	3000W
Number Of Oven Racks	3	Automatic Shut Off	No
Number Of Oven Lights	3	Rack Guide Type	Molded
Interior Color	Black	Oven Rack Type	Gliding Roll-Out
Hidden Bake Element	Yes		

Precise, dual flames produced by precision-drilled brass burners. Inside the oven cavity, steady heat weaves around each flat tine. From searing select cuts and simmering sauces to succulent roasts, these ranges offer unmistakable firepower.

Top Features

Remote Access

Cast Iron Grates

JennAir® Culinary Center

Manuals & Literature:

 [Dimension Guide](#)  [Installation Instruction](#)


 [Owners Manual](#)  [Warranty Information](#)

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE
Overall Width (A)	29-7/8" (75.9 cm)	35-7/8" (91.1 cm)
Bull nose Height (B)	2-1/8" (5.4 cm)	2-1/8" (5.4 cm)
Control Panel Height (C)	7-1/2" (19.1 cm)	7-1/2" (19.1 cm)
Door Height (D)	20-11/16" (52.6 cm)	20-11/16" (52.6 cm)
Door Bottom to Handle Top: RISE™ (E)	20" (50.8 cm)	20" (50.8 cm)
Door Bottom to Handle Top: NOIR™ (E)	20-5/8" (52.4 cm)	20-5/8" (52.4 cm)
Toe-Kick Height (F)	6-11/16" (17 cm)	6-11/16" (17 cm)

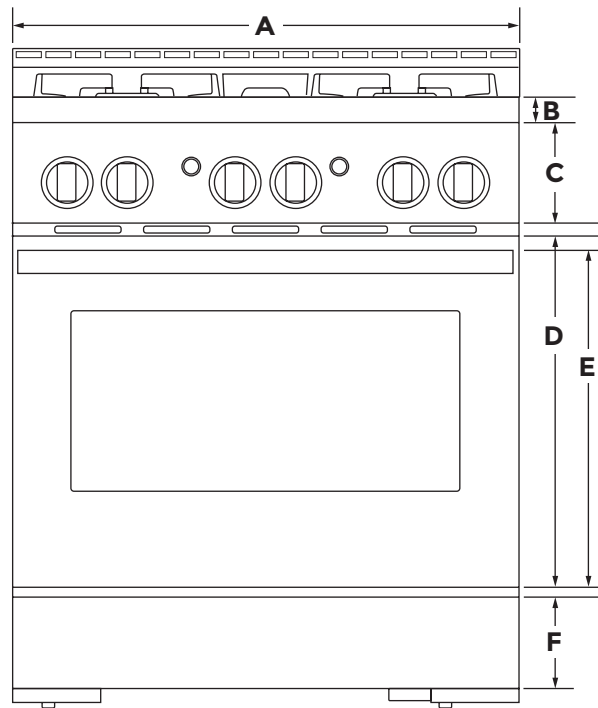

FRONT VIEW




IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE
Depth with Control Panel Overhang (G)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth with Handle: RISE™ (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with Handle: NOIR™ (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Door Fully Open (I)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)

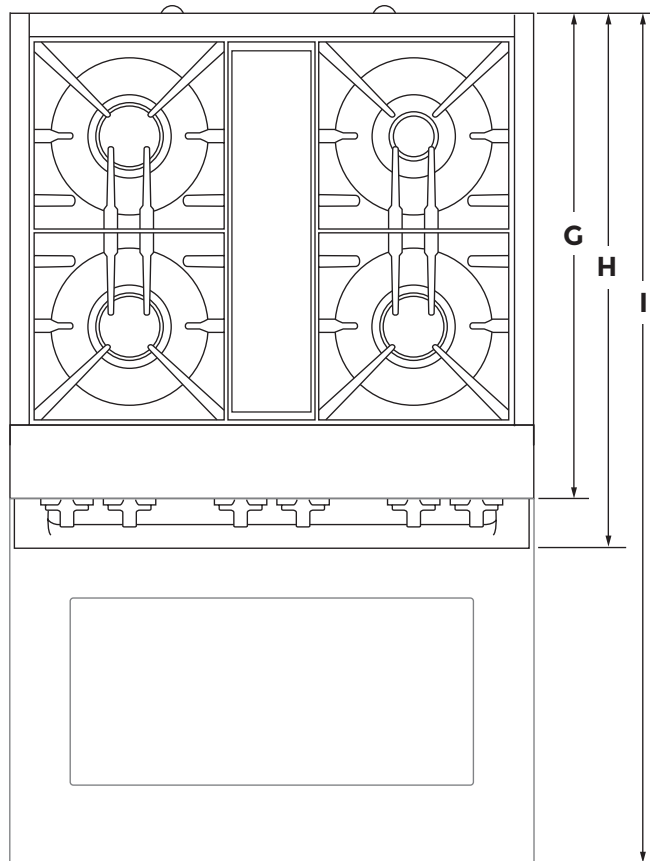


TOP VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Grates Top Height (A)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)
Cooking Surface Top Height (B)	36" (91.4 cm)	36" (91.4 cm)	36" (91.4 cm)
Door Top Height (C)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)
Handle Top Height: RISE™ (D)	27" (68.6 cm)	27" (68.6 cm)	27" (68.6 cm)
Handle Top Height: NOIR™ (D)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)
Toe-Kick Height (E)	6-11/16" (17 cm)	6-11/16" (17 cm)	6-11/16" (17 cm)
	OPTIONAL ACCESSORIES		
Height to Top of 9" Stainless Steel Backsplash (F)	45" (114.3) min.	45" (114.3) min.	45" (114.3) min.

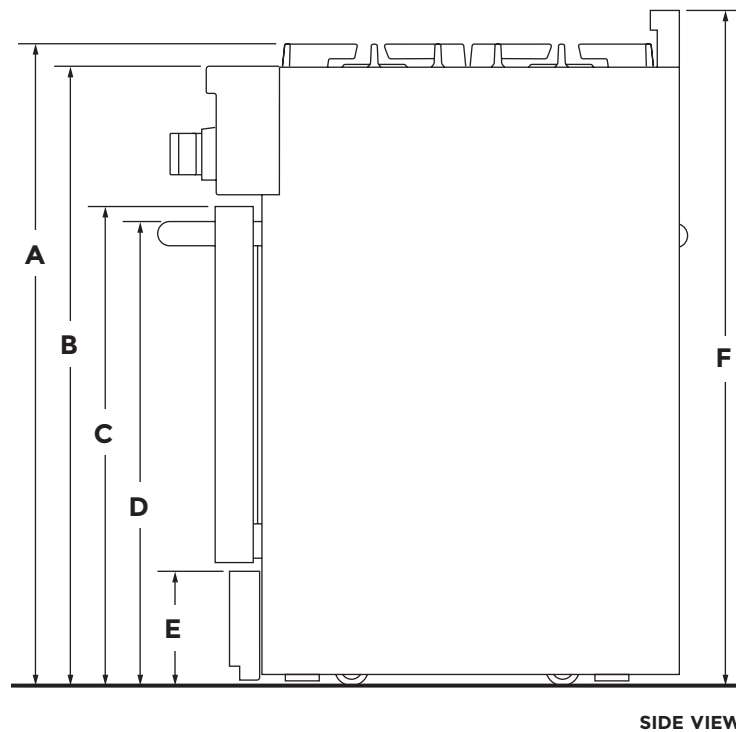

SIDE VIEW




IMPORTANT: Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/4" (4.4 cm) of added height.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Depth with Door Fully Open (G)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)
Depth with RISE™ Handle (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with NOIR™ Handle (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Control Panel Overhang (I)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth to Toe-Kick with Door (J)	26-3/8" (67 cm)	26-3/8" (67 cm)	26-3/8" (67 cm)
Depth with RISE™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)
Depth with NOIR™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)

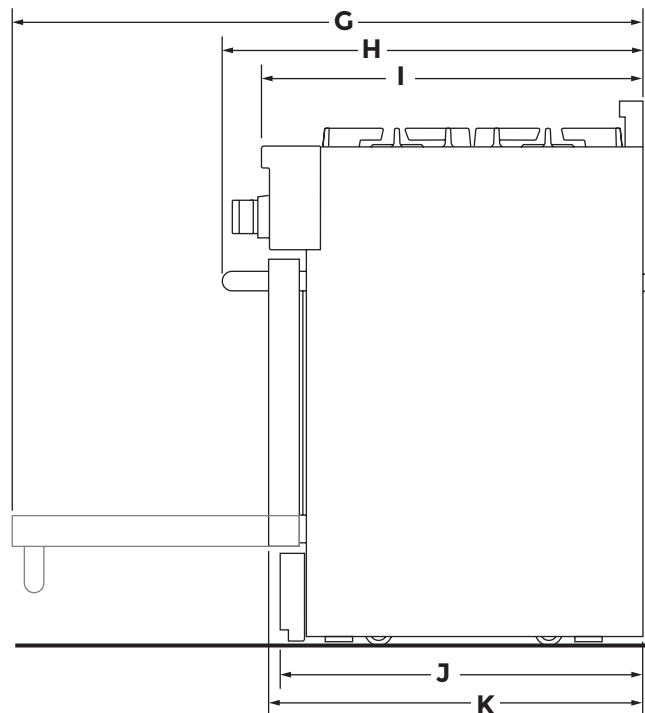


SIDE VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

	48" DUAL-FUEL RANGE
Overall Width (A)	47-7/8" (121.6 cm)
Bull nose Height (B)	2-1/8" (5.4 cm)
Control Panel Height (C)	7-1/2" (19.1 cm)
Door Heights (D)	20-11/16" (52.5 cm)
Door Bo ttoms to Handle Tops: RISE™ (E)	20" (50.8 cm)
Door Bo ttoms to Handle Tops: NOIR™ (E)	20-5/8" (52.4 cm)
Secondary Oven Door Width (F)	17-3/4" (45.1 cm)
Main Oven Door Width (G)	29-5/8" (75.2 cm)
Toe-Kick Height (H)	6-11/16" (17 cm)

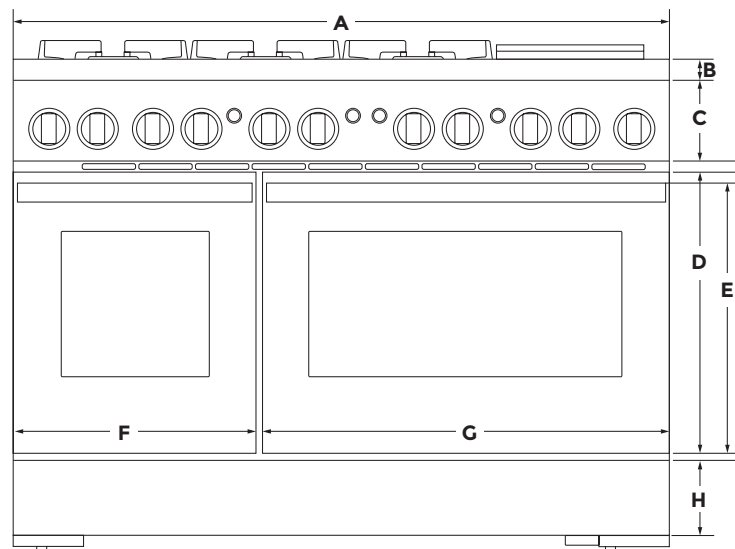


FRONT VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

	48" DUAL-FUEL RANGE
Depth with Control Panel Overhang (I)	27-11/16" (70.3 cm)
Depth with Handles: RISE™ (J)	29-13/16" (75.7 cm)
Depth with Handles: NOIR™ (J)	29-5/16" (74.5 cm)
Depth with Doors Fully Open (K)	46-1/2" (118.1 cm)

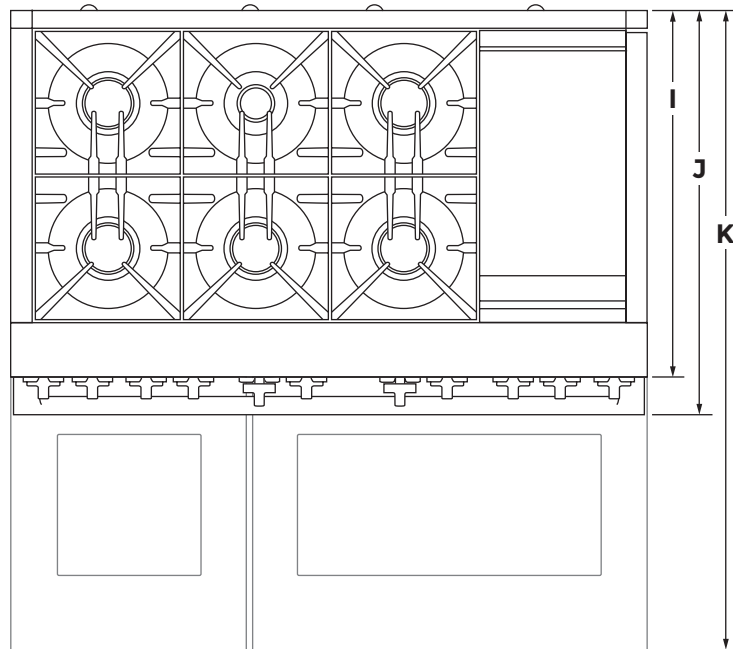

TOP VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Combustible Area Above Cooking Surface Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)*	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Countertop (C)	18" (38.1 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Material (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.
Opening Width (E)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.

*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

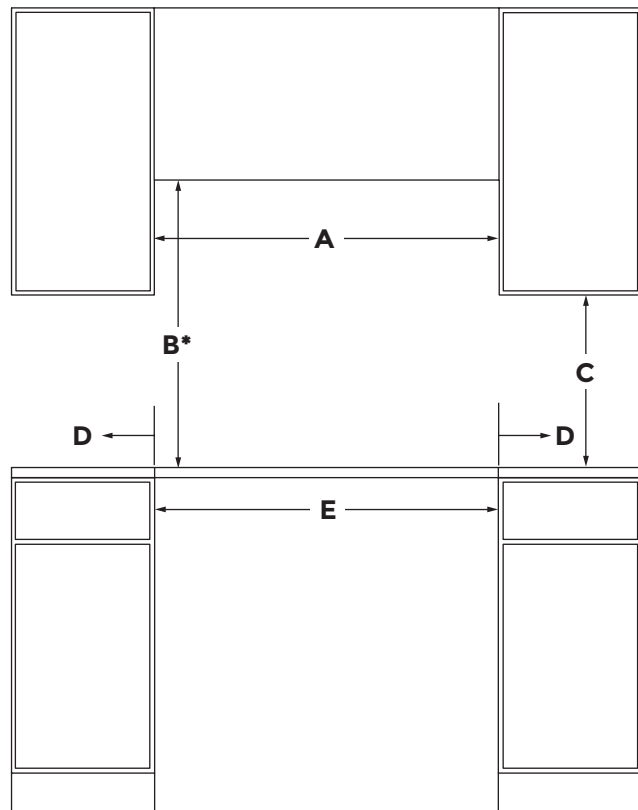

FRONT VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Upper Cabinet Depth (F)	13" (33 cm) max.	13" (33 cm) max.	13" (33 cm) max.
Depth to Wall (G)*	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 1-1/2" (3.8 cm) minimum clearance is required.

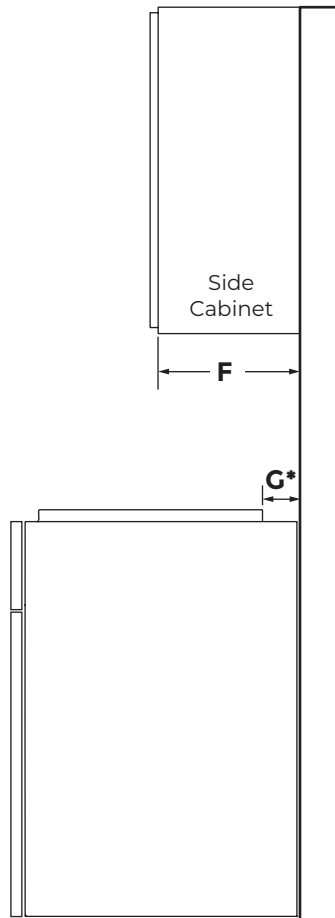

SIDE VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


ELECTRICAL REQUIREMENTS

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Electrical Zone Width (A)	22" (55.9 cm)	28" (71.1 cm)	40" (101.6 cm)
Electrical Zone Height (B)	15" (38.1 cm)	15" (38.1 cm)	15" (38.1 cm)
Electrical Zone Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)


ELECTRIC REQUIREMENTS CHECKLIST

- A 240 volt, 60 Hz, fused, grounded circuit is required.
- For 30" and 36" ranges, use a 40-amp circuit.
- For 48" ranges, use a 50-amp circuit.
- A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL ZONE

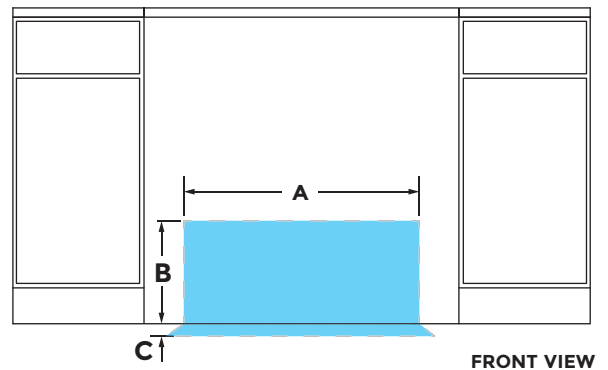

WIDTH TO ELECTRICAL CONDUIT

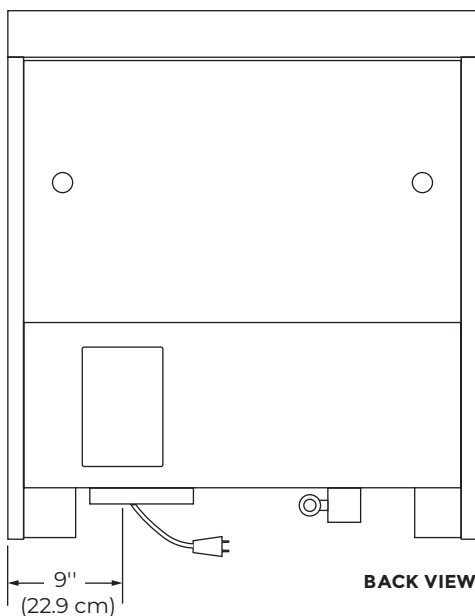

IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN.


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


GAS REQUIREMENTS

	30" CONNECTED DUAL-FUEL RANGE	36" CONNECTED DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Gas Opening Width (A)	6" (15.2 cm)	14" (35.6 cm)	24" (61 cm)
Gas Opening Height (B)	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)
Gas Opening Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)
Distance from Side Cabinet to Gas Opening (D)	6" (15.2 cm)	6" (15.2 cm)	6" (15.2 cm)
Width to Gas Inlet (E)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)

RECOMMENDED GAS ZONE

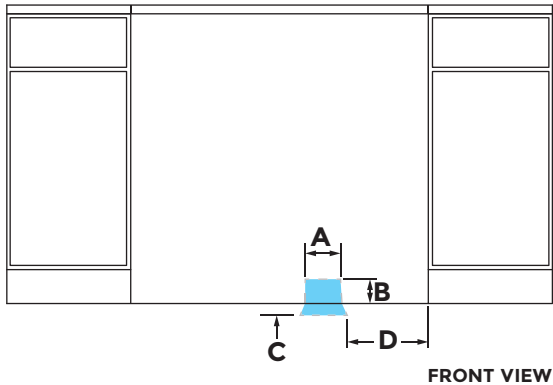

WIDTH TO GAS INLET

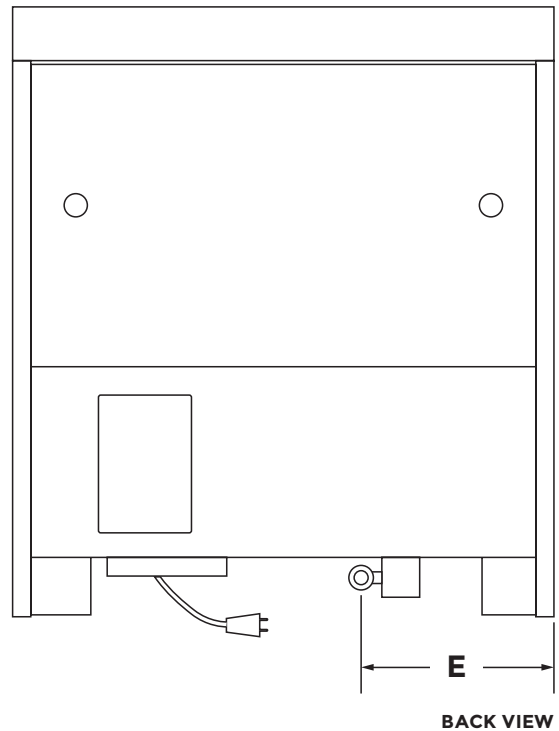

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.