



Culinary warming drawer
Gaggenau Expressive series
GW 083

GW 083 790

Fully integrated.
Not push-to-open, requires handle.
Custom-panel ready.
Width 30" (76 cm),
Height 8 7/16" (21.5 cm).

Installation accessories

Part No. 12039458
Bracket (set of 2) anti-tilt.

Highlights

- Integrable in 8 1/4" (21cm) high cut out.
- Bright interior lighting.
- Soft-close closing system.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 85 °F to 180 °F.
- Also for low-temperature cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

Heating methods

Preheating of small beverage containers/cups.
Warming cookware/plates.
Keeping meals warm.
Low-temperature cooking.
Direct temperature control.
Personalization function via Home Connect®.
16 additional programs via Home Connect®.

Operation

Touch key operation.

Features

Oven cavity size 1.7 cu.ft. (47 liters).
Volume capacity: Dinner service for 10 people including ø 10 5/8" (27 cm) plates and soup bowls, additional bowls and a serving dish depending on size.
Capacity load max. 55 lbs. (25 kg).
Usable interior dimensions
W 27 5/8" x H 6 7/16" x D 15 15/16"
(701 mm x 166 mm x 405 mm).
Heating system for even heat distribution and stable cavity temperature.
Glass bottom made of safety glass.

Selected digital services (Gaggenau Home Connect®)


Additional programs and recipes.
Remote control and monitoring.
Timing function.

Planning notes

Plan the cut out without back wall.
Installation directly above the drawer without intermediate shelf.
Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.
Front weight up to 6.6 lbs. (3 kg).
Necessary lateral gap between appliance front and cabinet panel of min. 3/16" (5 mm)
Built-in under countertop or in single cut out.
If the culinary warming drawer is built-in under a countertop or in a single cut out by itself, please add an additional 3/32" (2 mm) clearance in the overall planning height. Additionally, please order Part No. 12039458
Anti-tilting bracket.
The electrical box must be accessible and located outside the built-in cut out. The electrical box can be planned behind the appliance.

Rating

Total rating: 820 W (120 V).
Total amps: 6.8 A.
Minimum fuse protection: 10 A.
120 V, 60 Hz.
Plug (NEMA 5-15P), 68 7/8" cable.

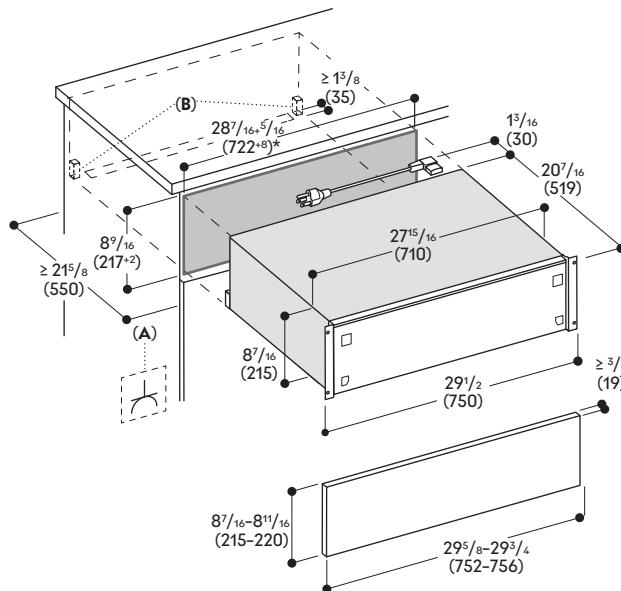

A: Accessible electrical connection

B: Anti-tilting

* The width tolerance as shown in the drawing indicated by the + 5/16" (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between 5/8" - 13/16" (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.