

FRIGIDAIRE GALLERY®

FGVH2177TF

2-IN-1 CONVERTIBLE FREEZER/ REFRIGERATOR

COOL CONNECT™ 20.5 CU. FT.

Smudge-Proof™
Stainless Steel



AVAILABLE
COLORS



PRODUCT DIMENSIONS

Height (Including Hinges)	73-3/16"
Width	34"
Depth (Including Door)	30-1/2"

MORE EASY-TO-USE FEATURES

Smudge-Proof™ Stainless Steel
Resists fingerprints and cleans easily.

Frost-Free Operation

Never defrost your freezer again so you can spend time on more important things.

Bright LED Lighting

Bright LED lighting so you can spend less time digging through your freezer for items.

Built with American Pride

Designed, engineered and assembled in the U.S.A.

CERTIFICATIONS

ENERGY STAR®



SIGNATURE FEATURES



Cool Connect™

Remotely control, monitor, receive alerts, and switch between your refrigerator or freezer with the Frigidaire Gallery® 2-in-1 Cool Connect™ Freezer/Refrigerator.



2-in-1 Freezer or Refrigerator

As your cold storage needs change, our 2-in-1 Freezer or Refrigerator offers you the flexibility to switch between freezer and refrigerator.



SpaceWise® Organization System

Offers organizational solutions you can customize to fit your needs like SpaceWise® Adjustable Door Bins and SpaceWise® Removable Baskets.



ArcticLock™ Thicker Walls

Keeps food frozen for over 2 days if there is a power outage.

FGVH2177TF CONVERTIBLE FREEZER/REFRIGERATOR

20.5 CU. FT.

FRIGIDAIRE
GALLERY

FEATURES

Door Handle Design	Reach-Through
Reversible Door	
Automatic Door Closer	Yes
Leveling Legs	Yes
Defrost	Frost-Free
Adjustable Temperature Control	Electronic Controls
Front Digital Display	Yes
Temp Display Mode	°F/°C
High-Temp Alarm	Yes
Power Failure Alarm	Yes
Interior Lighting	Theatre LED
Temperature Range	Refrigerator: 33 °F - 43 °F Freezer: -10 °F - 10 °F
Full-Width Adjustable Shelves	3 Wire
Full-Width Fixed Shelves	1 Wire
SpaceWise® Lower Basket	1 Wire
Soft Freeze™ Zone	
SpaceWise® Adjustable Door Bins	4 Half-Width Clear
Full-Width Door Bins	2 Clear
Convertible	Yes

CERTIFICATIONS

ENERGY STAR®	Yes
CSA Rating	Household


SPECIFICATIONS

Total Capacity (Cu. Ft.)	20.5
Shelf Area (Sq. Ft.)	131
Annual Energy (kWH)	484
Annual Energy Cost (.12/kWH)	\$58
Power Cord Connection Location	Lower Right Rear
Voltage Rating	115V/60Hz
Connected Load (kW rating) @ 115 Volts¹	0.6
Amps @ 115 Volts	5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	239 Lbs.

¹An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

PRODUCT DIMENSIONS

A - Height (Including Hinges)	73-3/16"
B - Width	34"
C - Depth (Including Door)	30-1/2"
Depth with Door Open 90°	62-1/8"

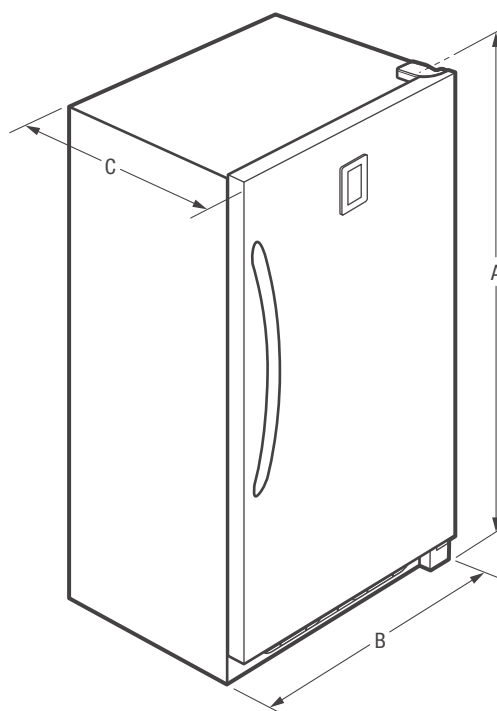

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.

Specifications subject to change. Accessories information available on the web at frigidaire.com



FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGVH2177T 07/17
© 2017 Electrolux Home Products, Inc.

FGVH2177TF CONVERTIBLE FREEZER/REFRIGERATOR

20.5 CU. FT.

FRIGIDAIRE
GALLERY

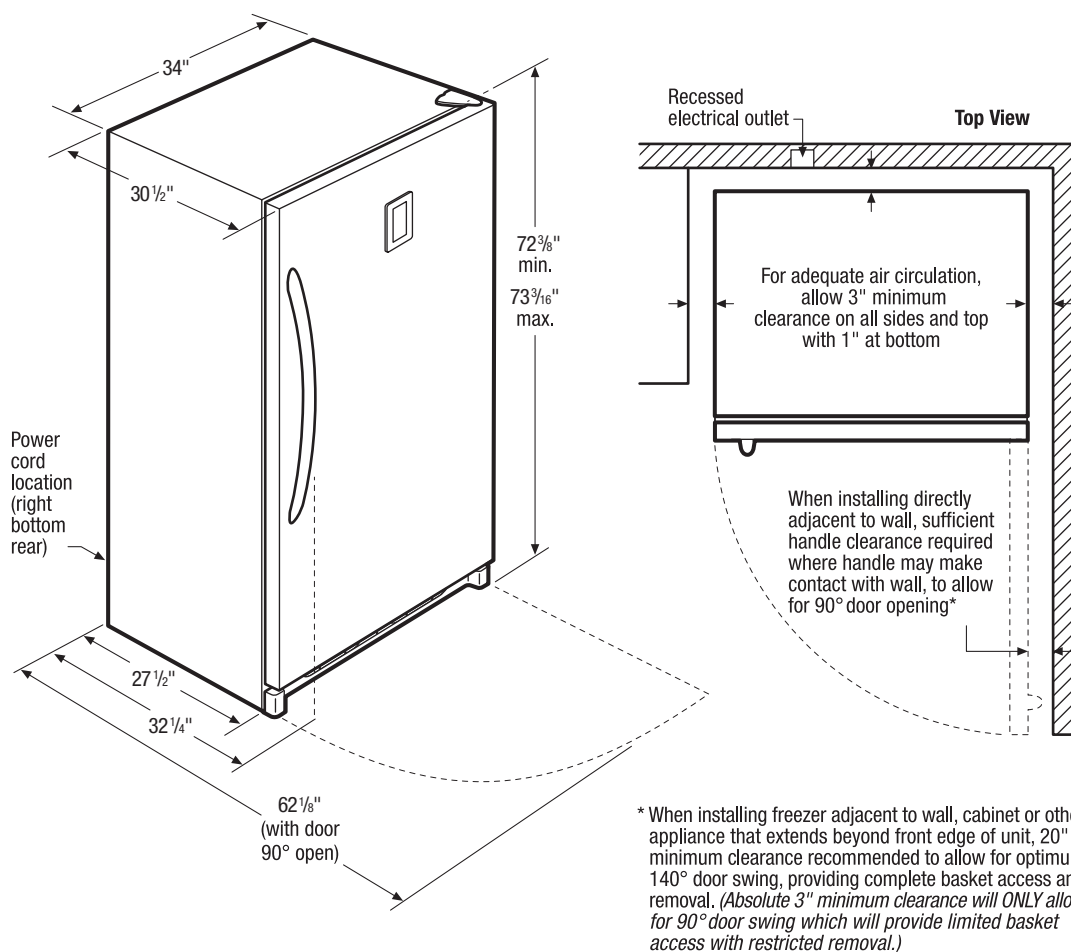

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) – 239 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating – 115V, 60Hz
- Connected Load (kW Rating) @ 115 Volts = 0.6 kW
- Amps @ 115 Volts = 5 Amps
- Always consult local and national electric codes.
- For adequate air circulation, allow 3" minimum clearance on all sides and top with 1" at bottom.
- When installing freezer adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete basket access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited basket access with restricted removal.)
- Locate where surrounding air temperature will not exceed 110°F, to ensure optimum performance. (Temperatures 32°F and below will NOT affect operation.)
- All bottom corners of unit MUST rest firmly on solid level surface of hard material, same height as flooring. Surface must be strong and stable enough to support unit when fully loaded.
- Equipped with adjustable leveling legs to ensure unit is level, which is required in order to function properly.



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.

Specifications subject to change. Accessories information available on the web at frigidaire.com

FGVH2177T 07/17

© 2017 Electrolux Home Products, Inc.