


LITTORA 200 OD SAT 5

Product Sheet

The OD Sat 5 loudspeaker takes the Focal Sound into your outdoor spaces! Its 5" (13cm) speaker driver with the unprecedented Iris IP cone and its Aluminium 'M'-shaped inverted dome tweeter deliver faithful and high-quality sound reproduction. Plus, its integrated transformer makes it 70/100V compatible to cover large spaces with no loss of power. Finally, with its IP55 certification and anti-UV treatment, OD Sat 5 withstands adverse weather and extreme climates to keep you listening all year round. Available in Dark and Light finishes, it boasts a discreet design to blend seamlessly into all outdoor spaces.

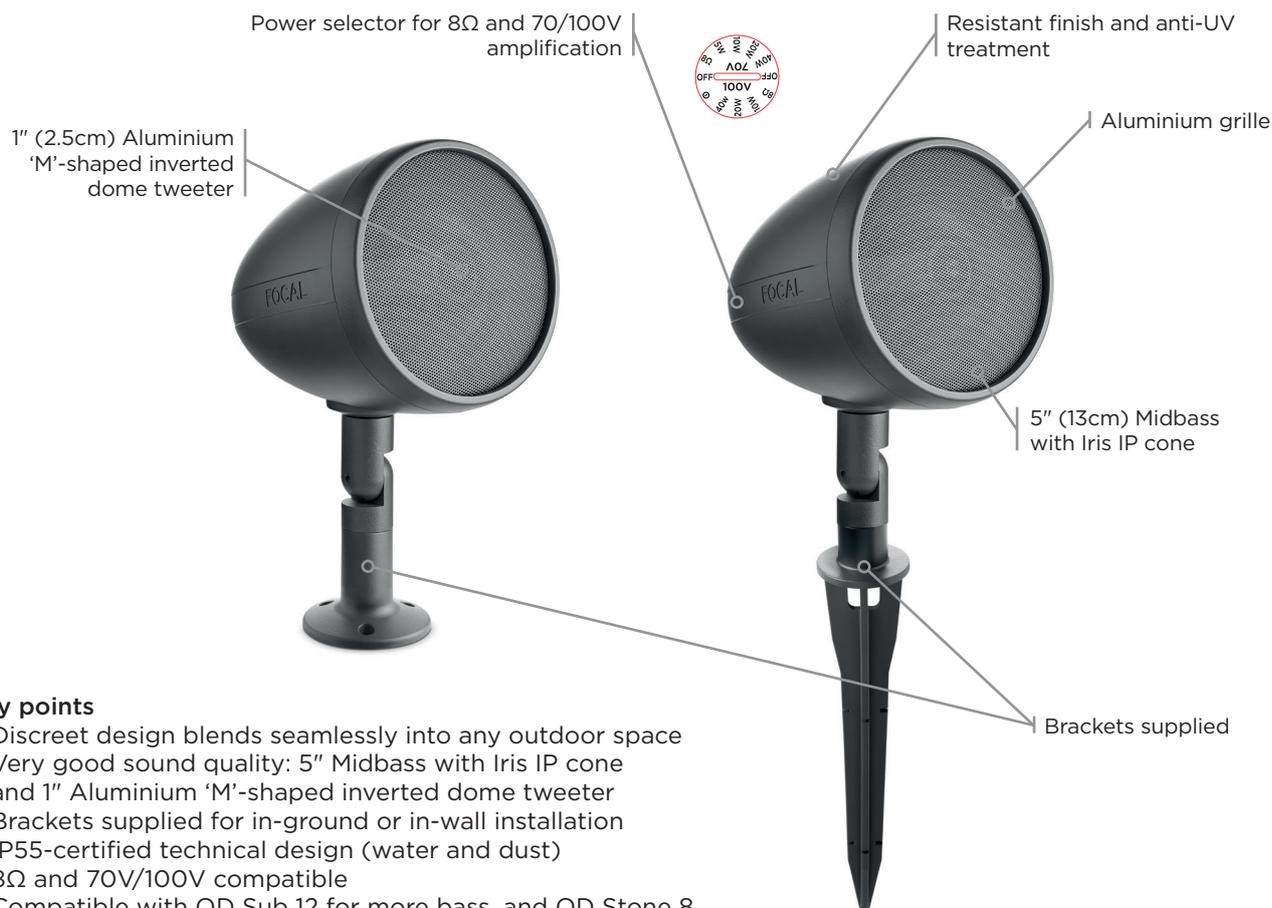

Key points


- Discreet design blends seamlessly into any outdoor space
- Very good sound quality: 5" Midbass with Iris IP cone and 1" Aluminium 'M'-shaped inverted dome tweeter
- Brackets supplied for in-ground or in-wall installation
- IP55-certified technical design (water and dust)
- 8Ω and 70V/100V compatible
- Compatible with OD Sub 12 for more bass, and OD Stone 8

Technical specifications


Type of speaker	2-way outdoor speaker
Speaker drivers	5" (12.7cm) Midbass, Iris IP cone 1" (2.5cm) Aluminium 'M'-shaped tweeter
Bandwidth	90Hz - 28kHz
Impedance	8Ω
Minimal impedance	5.2Ω at 250Hz
Sensitivity	88dB
Power	50W RMS - 100W Peak
Recommended amp power 8Ω	20W - 100W
Transformer positions	70V - 100V / 5W, 10W, 20W, 40W
Temperature tolerance	-20° / 65°
IP rating	IP55
Angle coverage	90°
Dimensions (WxDxH)	12 ^{5/8"} x12 ^{5/8"} x8 ^{1/4"} (32x32x21cm)
Weight	5.5lbs (2.5kg)



Directionality measurements

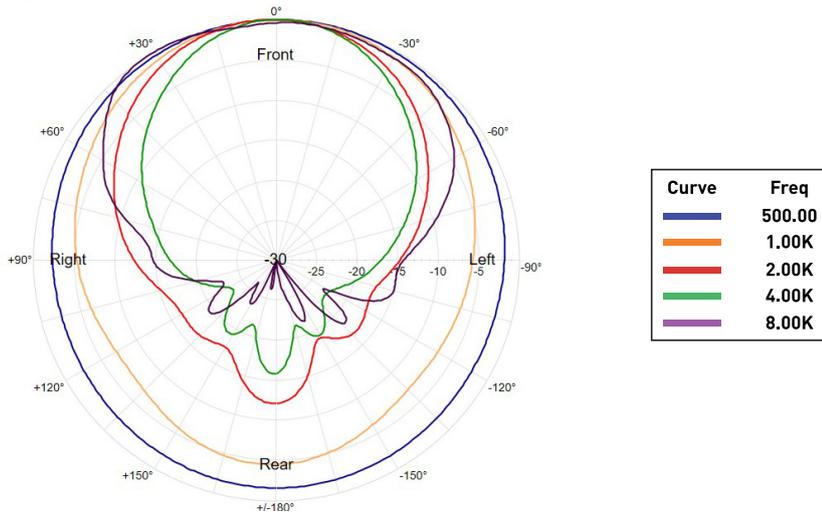

Frequency response

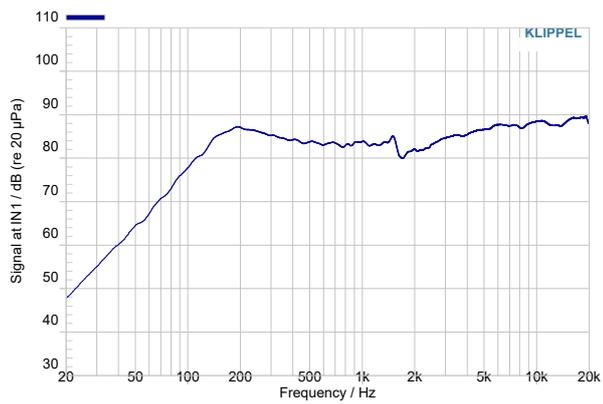

Levels calculation table

Nominal sensitivity	88dB		
Power/Distance	1m	2m	5m
1W (2.83V)	88dB	82dB	74dB
20W (12.6V)	101dB	95dB	87dB
50W (20V)	105dB	99dB	91dB
100W (28.3V)	108dB	102dB	94dB