
Soating Canacity	8 0 Adulte
Seating Capacity Dimensions	92" x 110" x 41 1/2"
	(234 cm x 279 cm x 106 cm)
Corner Radius	. 15" (38 cm)
Dry Weight	. 966 lbs (438 kg)
Filled Weight (Average Fill)	. 5.903 lbs (2.678 kg)
Water Capacity (Average Fill)	. 592 US gallons (2,241 Liters)
Shipping Weight	. 1,110 lbs (503 kg)
Export Shipping Weight:	. 1,160 lbs (526 kg)
Electronic Controls	.D1 SmartHUB™ full color glass touch control
	panel; access to control jets, temperature,
	settings and maintenance schedule
Pump 1	. North America (60 Hz): 2-Speed, 3.6 HP break,
	2.5 HP continuous, 48 Frame
Export (50 Hz):	. 2-Speed, 2.0 HP continuous
	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):	.1-Speed, 2.0 HP continuous
Pump 3	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):	. 1-Speed, 2.0 HP continuous
Circulation Pump	
Fountain Pump	. Yes - 24/7 Filtration (Durgo Cycles 2 v 10 minutes)
Total VCB lota	. 24/7 Filtration (Purge Cycles 2 x 10 minutes)
Total VCR Jets	.50 .2 Euro Cluster Storm Dual Rotator (on side of wall)
Soat 2 lote	. 1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 5 Mini Storm Rotator,
Jeat 2 Jets	1 Power Storm Rotator, 2 Euro Cluster Storm Dual Rotator, 2 Euro Cluster Storm
	Directional
Seat 3 Jets	. 1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 3 Power Storm Dual
	Rotator, 4 Mini Storm Rotator, 4 Euro Cluster Storm Dual Rotator, 2 Euro Cluster Storm
	Directional
Seat 4 Jets	.4 Mini Storm Rotator, 1 Power Storm Dual Rotator, 1 Typhoon (side wall)
Seat 5 Jets	. 2 Power Storm Rotational, 2 Mini Storm Rotator
	. 1 Power Storm Rotator, 2 Euro Cluster Storm Direct
	.1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 2 Power Storm
	Rotator, 4 Power Storm Directional, 6 Mini Storm Rotator
Footwell (8)	.1 Typhoon
Massage Selectors	.2
Special Features	. Tactile Therapy, Spa Status Light, 3 Flex Therapy Pillow, Aux Control
Water Management System	. UltraPure System; Two 75 ft filter cartridge; 8" Weir
LED Lighting	Liquid FX
Optional	
Torracina Cabinet (Ontional)	. Adobe Tan, Stoneridge Grey, Mayan Brown . Driftwood, Caramel Teak, Vintage Cedar, Midnight Maple, Coastal White
	. Moonstone, UltraLife, Sunstone, Smoked Marble, Gray Marble, Desert Stone
Headrests	3 Fley Therany Pillow
	. Rainbow Fountain and Babbling Brook with diverter and flow rate valves; powered by
	the fountain pump
Heater	
Export (50Hz)	. 2.1, 3.4, 5.5 kW
Electrical Requirements:	. North America (60 Hz): 240 VAC@40A or 50A
•	Export (50 Hz): 230 VAC@1x32A, 2x16A, 3x16A or suitably rated circuit breaker
	to comply with local electrical codes. Certain countries may require dual power
	inputs
Warranty*	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell
	Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect
	Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for
	Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo;
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface,
	5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect
	Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System,
Audio System (Ontional)	2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo. Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a
Audio Oystein (Optional)	subwoofer
Wi-Fi (Optional)	
**1-1 1 (Optional)	. Ορα-τα

^{*(}See Warranty Document for Specific Details)

Massage Selector Diagram

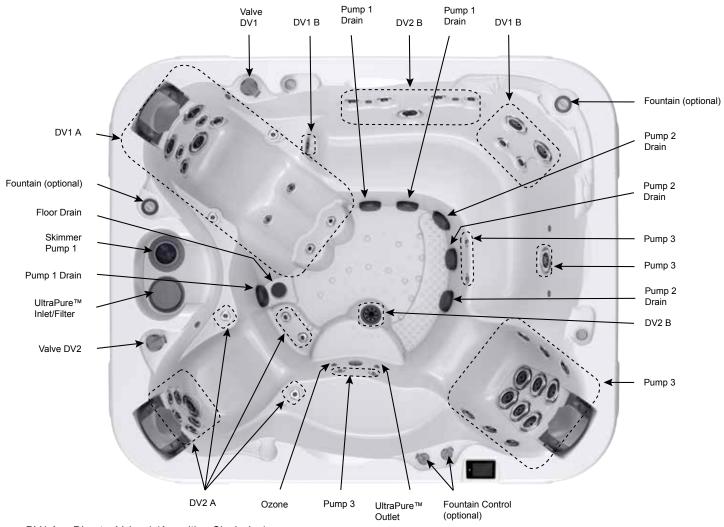

DV1 A = Diverter Valve 1 (A position Clockwise)

DV1 B = Diverter Valve 1 (B Position Counter Clockwise)

DV2 A = Diverter Valve 2 (A position Clockwise)

DV2 B = Diverter Valve 2 (B position Counter Clockwise)

Spa Operation Subject to Change without Notice

Seat Depths

1 = 17.00" (43.18 cm) 7 = 27.50" (69.85 cm) 2 = 17.00" (43.18 cm) 8 = 27.33" (69.42 cm) 9 = 29.75" (75.57 cm) 3 = 27.33" (69.42 cm)

4 = 28.50" (72.39 cm)


5 = 26.00" (66.04 cm) 6 = 26.20" (66.55 cm) 10 = 38.50" (97.79 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Jet Designation

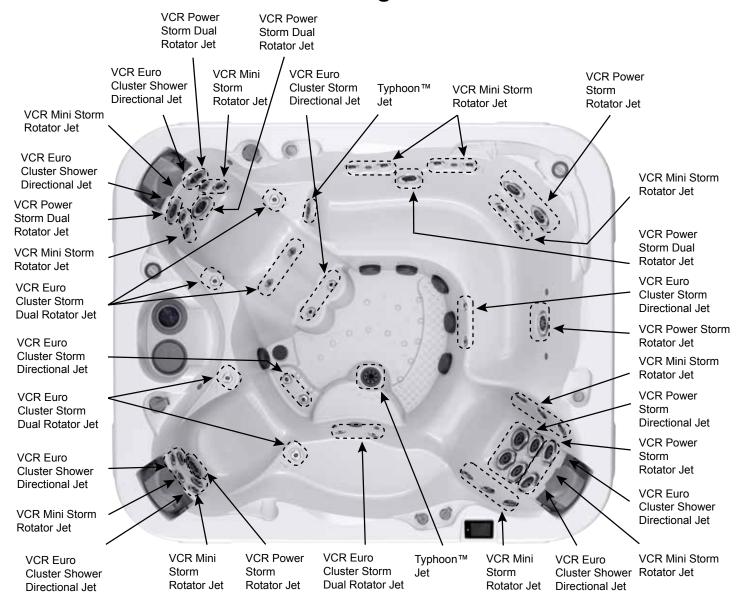

Dimensions/Operation/Specifications are Subject to Change Without Notice

60 Total Jets



Mini Storm Rotator (21)



Cluster Storm Dual Rotator (8)



Power Storm Rotator (6)



Typhoon Jet (2)

Total Jets



Power Storm Dual Rotator (4)



Power Storm Directional (4)




Cluster Storm Directional (6)



Flex Therapy Pillow (3)





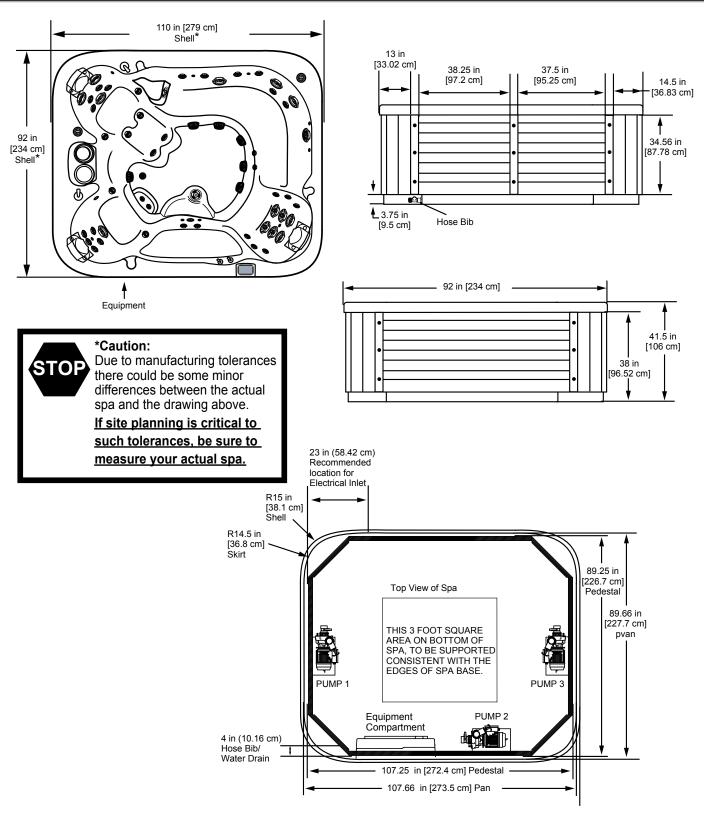

Note: 1. Subject to change without notice.

- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
- 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
- 5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).