

ADA24RGL



24" ADA Glass Door Refrigerator • ADA Series

FEATURES & BENEFITS



PERFORMANCE

- Volume of 5.4 cu ft holds up to 70 bottles (12 oz) or 140 cans (12 oz)
- Digital Touch Pad Control is conveniently located on upper face of unit
- Temperature range: 34°F - 45°F
- Convection cooling system rapidly and efficiently takes items to the set temperature

INTERIOR/EXTERIOR

- 32" height meets ADA height requirement yet maximizes allowable space
- White interior is illuminated with LED lighting
- Three adjustable glass shelves
- LowE coated, argon gas filled, dual thermopane glass door provides protection from harmful UV Light
- Stainless steel handle (7/8" diameter)
- Door swing is field reversible, and is shipped right-hand hinged
- Door lock is standard on stainless and black models

INTEGRATION


- Unit is designed to be built-in or can be freestanding
- Four independently adjustable leveling legs provide a precise undercounter fit
- Available in the following finishes: Stainless, Integrated, or Black
- Integrated model requires 3/4" custom door panel (panels not supplied by U-Line)

MODEL DETAILS


| Model | Voltage/Hz | Door Swing | Finish | Shipping Weight |
|-------------------|------------|------------------|------------------------|-----------------|
| U-ADA24RGLS-13B | 115 / 60 | Field Reversible | Stainless Frame (Lock) | 128 lb |
| U-ADA24RGLINT-00A | 115 / 60 | Field Reversible | Integrated | 122 lb |
| U-ADA24RGLB-13B | 115 / 60 | Field Reversible | Black Frame (Lock) | 128 lb |

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

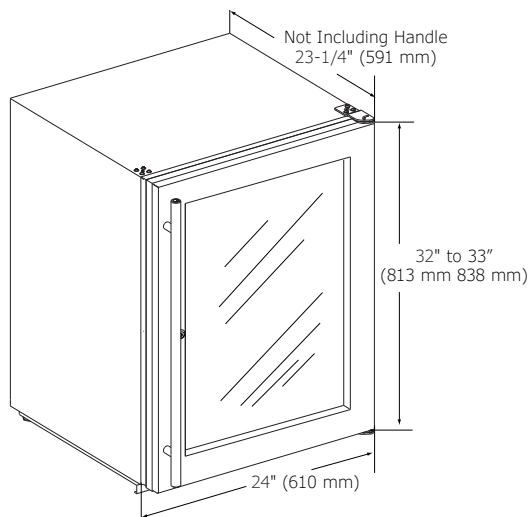

CABINET CUT-OUT

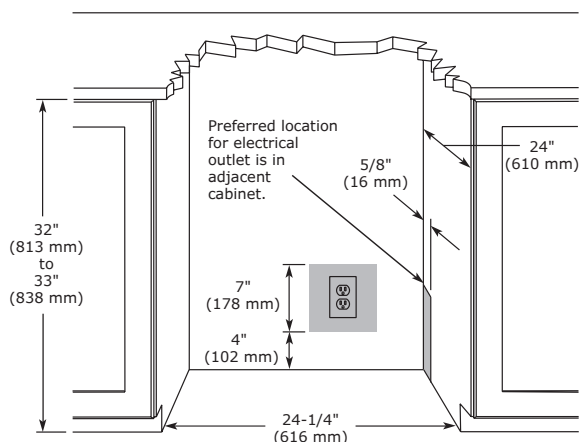

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.

Cutout includes the additional 1/4" width overall to ensure proper installation.


No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

SPECIFICATIONS

| | |
|-----------------------------------|----------------------------|
| Model | ADA24RGL |
| Amps: Running | 1.2 |
| Capacity: Bottle (12 oz) | 70 |
| Capacity: Can (12 oz) | 140 |
| Capacity: Volume (cu ft) | 5.4 |
| Control Type | Digital Touch Pad |
| Dimensions: Product Depth | 23 1/4" / 591 mm |
| Dimensions: Product Height | 32" / 813 mm |
| Dimensions: Product Width | 24" / 610 mm |
| Energy Consumption: Avg. Per Year | 300 kWh |
| ENERGY STAR | No |
| Panel Height | 30 1/4" / 768 mm |
| Panel Thickness | 3/4" / 20 mm |
| Panel Type | 2 3/4" / 70 mm Frame Panel |
| Panel Width | 23 3/4" / 603 mm |
| Product Weight: Max | 122 lb |
| Refrigerant Type | R600a |
| Sabbath (Star K Certified) | Yes |
| Temperature Range | 34°F - 45°F |

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.