



## UNDERCOUNTER REFRIGERATOR

*Viking Professional 5 Series – VRCI/VRCO*

### PROFESSIONAL FEATURES

- 2014 Energy Compliant
- Electronic controls with digital temperature readout
  - Temperature can be adjusted from 33 to 39 degrees F (0.6 to 3.9 degrees C); factory set at 34 degrees F (1.1 degrees C)
- Can be displayed in either Fahrenheit or Celsius
- 5.3 cubic feet of storage
- Two full-extension adjustable wire shelves
  - 75-pound capacity
  - Each shelf accommodates 54 12-oz. cans
  - Removable and adjustable
- Dual pane and argon-filled Low-E energy-efficient glass doors (indoor model only)
- LED display lighting

### PROFESSIONAL-STYLE CONSTRUCTION

- Undercounter or freestanding installation
- Forced air cooling system
- Powerful 700 BTU compressor
- Stainless steel interior
- Stainless steel exterior cabinet
- Tru-Flush design allows refrigerator to fit flush into 24" deep installation cutout
- Self-closing door
- Super quiet 39 dB sound rating
- Black kickplate
- Adjustable leveling legs



### AGENCY-CERTIFIED OUTDOOR MODEL

- Insulated electrical terminals, sealed electrical contacts, and a water-resistant thermostat provide optimal performance in all weather elements
- Solid Stainless Steel door with door lock
- Stainless steel kickplate

### MODEL NUMBERS

- VRCI5240G(R/L)SS – 24"W. Undercounter Refrigerator (indoor unit) – Glass door
- VRCO5240D(R/L)SS – 24"W. Undercounter Refrigerator (outdoor unit) – Solid door

### DESIGN OPTIONS

- Order as right or left hinge

### COLOR FINISHES

- Available in Stainless Steel (SS)

### WARRANTY

- 3-year full covers complete indoor unit
- 2-year full covers complete outdoor unit
- 6-year full – sealed refrigeration system
- 90-day full – cosmetic parts such as glass, painted items, and decorative items
- 12-year limited – sealed refrigeration system






# UNDERCOUNTER REFRIGERATOR

*Viking Professional 5 Series – VRCI/VRCO*

24"W. UNDERCOUNTER/FREESTANDING REFRIGERATOR	
DESCRIPTION	VRCI/VRCO5240
Overall Width	23-7/8" (60.6 cm)
Overall Height	34-1/4" (87.0 cm) minimum; 35" (89.0 cm) maximum
Overall Depth from Rear	To side panel – 22-1/16" (56.0 cm) To front of door panel – 24-1/16" (61.1 cm) To front of handle – 26-9/16" (67.5 cm)
Cutout Width	24" (61.0 cm)
Cutout Height	34 1/2" (87.6 cm) minimum; 35 1/2" (90.2 cm) maximum
Cutout Depth	24" (61.0 cm)
Electrical Requirements	115VAC/60Hz; 15-amp dedicated circuit; 5' (152.4 cm) power cord attached to product
Maximum Amp Usage	3.0 amps
Maximum Storage Capacity	5.3 cu. ft.
Approximate Shipping Weight	200 lb. (91 kg)

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

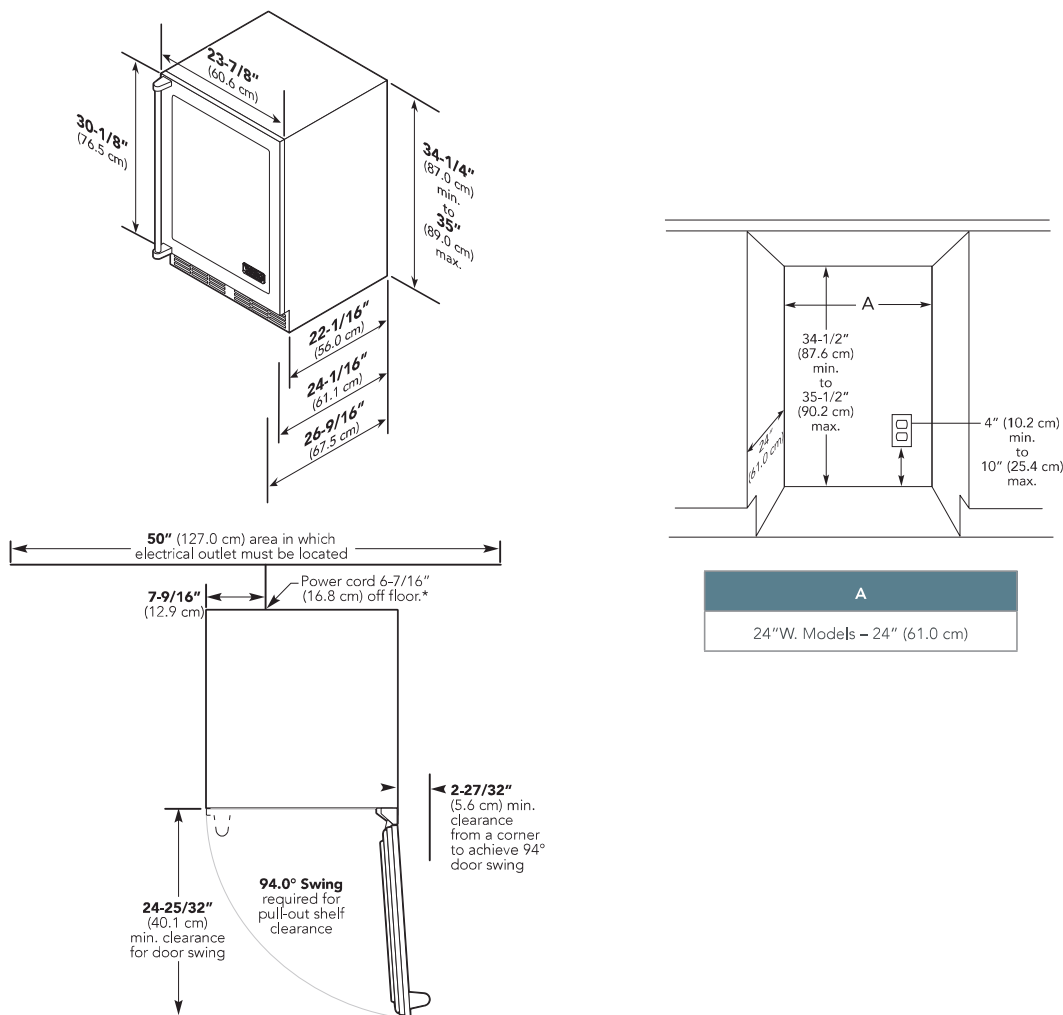

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit [vikingrange.com](http://vikingrange.com)

© 2014 Viking Range, LLC All rights reserved. Specifications subject to change without notice.