

# PINSV146SS

Insert


**YALE**  
APPLIANCE





This hood provides professional grade performance, while being discreetly mounted inside the cabinetry. It is available with a 1200 CFM blower for extraordinary ventilating power.

Plus the All-In-One design avoids the need to purchase a stainless liner. Hidden metallic in/out knob controls operate the 4-speed blower and LED lighting. A cleaner kitchen is ensured by angled traditional baffle filters.

## MOUNTING HEIGHT RANGE

  
 $\geq 24"$   $\geq 30"$

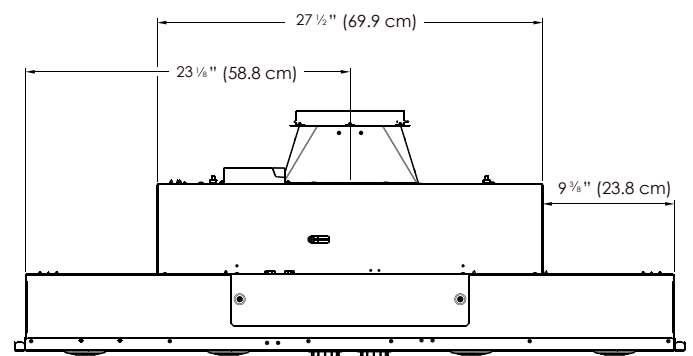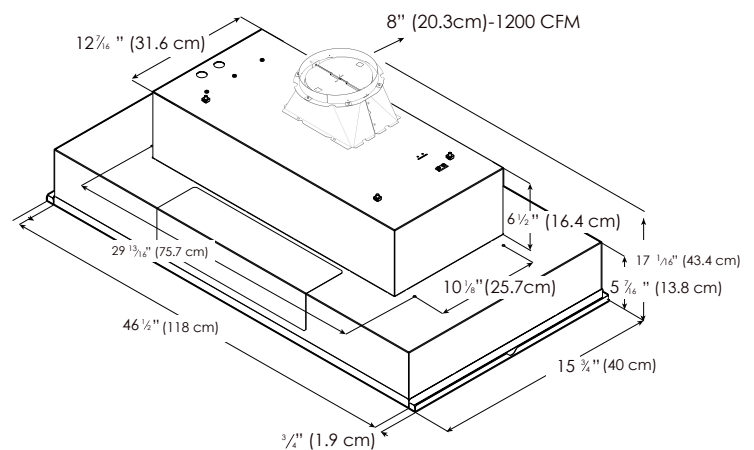

## SPECIFICATIONS

<b>Width:</b>	46" Unit
<b>Model:</b>	PINSV146SS
<b>Dimensions:</b>	46 1/2" W x 15 3/4" D x 11 7/8" H
<b>Blower Type(internal):**</b>	1200 CFM (4-speed)
<b>Noise (sones):**</b>	1.7 - 8.5
<b>Finish:</b>	Stainless Steel
<b>Controls:</b>	Fully retractable rotating knobs with white backlighting
<b>Illumination: (replaceable lamps 1 intensity)</b>	4 LED, 7.5 W 3000 Kelvin, 540 lumens/lamp
<b>Grease Filter:</b>	3 Dishwasher-Safe, Professional Stainless Steel Baffle Filters
<b>Duct Transition:</b>	8" Round with Backdraft Damper (top only)
<b>Installation Type:</b>	Ducted or Recirculating with Kit
<b>Mounting Height Range:</b>	Electric ≥ 24", Gas ≥ 30"
<b>Electrical:</b>	120V - 60 Hz, 926 W
<b>ACCESSORIES:</b>	
<b>External Blower Shell Kit:</b>	ACC0179547 (8" or 10" duct size compatible)
<b>Inline Blower Shell Kit:</b>	ACC0179549 (8" or 10" duct size compatible)
<b>Recirculating Kit:</b>	
<b>Carbon filters:</b>	ACC0192765 (Contains 4 round carbon filters)
<b>Metal Deflector:</b>	ACC0192763 (8" round for 1200 CFM models)
<b>Transition Reducer Kit:</b>	ACC0185271 (10" round down to 8" round)
<b>WARRANTY:</b>	Two (2) years parts & in-home labor

## FEATURES



**Quiet System** - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



**Grease Collecting Baffle Filters** - Intended for high airflow cooking, Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.



**Thermal barrier** - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



**Air Flow Control - AFC** technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



**Fine precision** - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.



**Superior performance** - High performance ventilation with blowers ranging from 600 to 1200 CFM.

## AIRFLOW CONTROL

Air Flow Control technology enables the user to reduce the maximum blower CFM of your hood achieving <300 CFMs, to meet local code requirements.

This model includes an Electronic Bypass Kit that needs to be placed at the moment of installing.