

36" GAS COOKTOP

400 SERIES



MODEL CODE

F4MTGK36S1



Heavy-Duty Grates



Continuous Grate Surface



Dual-Flame Burner



Automatic Reignition System



Brass Burners



Americans with Disabilities Act †

DESCRIPTION

The Matteo 400 series 36" gas cooktop combines sophisticated design with powerful performance, featuring brass burners and a Traditional layout with a central wok burner. Its clean, contemporary design complements a wide range of kitchen aesthetics while providing a practical, user-friendly cooking surface. The robust cast iron grates are both elegant and resilient, designed for easy removal and convenient cleaning. With a continuous cooking surface and a flexible burner layout that includes automatic re-ignition, this cooktop is engineered to deliver both performance and safety, meeting the high standards of discerning cooks.

FEATURES

- 5 gas burners with 1 dual-flame burner (Center)
- Polished Brass burners
- Automatic re-ignition system
- Heavy-duty continuous cast iron grates
- Elegant brushed stainless steel cooktop base
- Convertible to Liquid Propane

INCLUDED ACCESSORIES

- | | |
|-------------|-------------------|
| 41091256 | Installation Kit |
| 49000100544 | LP Conversion Kit |

OPTIONAL ACCESSORIES

- | | |
|-------|--------------|
| FMWOK | Wok Ring |
| FMSIM | Simmer Plate |

† To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.


36" GAS COOKTOP

400 SERIES



MODEL CODE

F4MTGK36S1

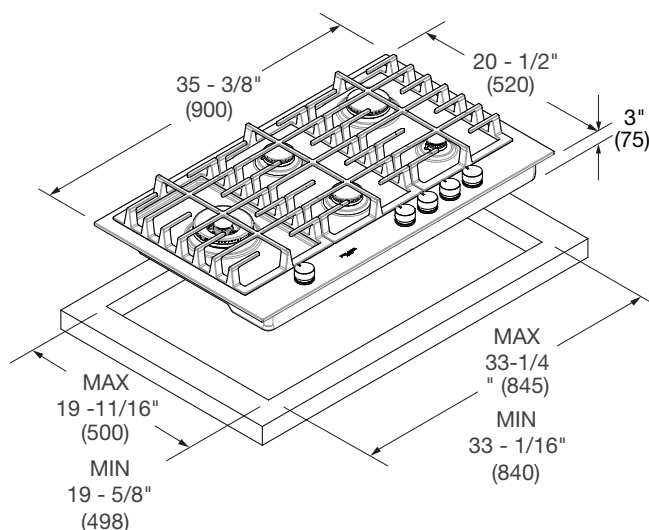

MODEL CODE	36" GAS COOKTOP F4MTGK36S1	
GENERAL DETAILS		
Finish	Brushed Stainless Steel	
Control Type	Knobs	
Fuel Type	Gas (NG or LP)	
Heavy-Duty Cast Iron Grates	3	
Cooking Zones	5	
Sealed Burners	Yes	
DIMENSIONS / WEIGHT		
Product Width, in. (mm)	35-3/8	(900)
Product Height, in. (mm)	5-1/4	(132)
Product Depth, in. (mm)	20-1/2	(520)
Cutout Width (min-max), in. (mm)	33-1/16 - 33-1/4	(840 - 845)
Cutout Height (min), in. (mm)	3-3/8	(86)
Cutout Depth (min-max), in. (mm)	19-5/8 - 19-11/16	(498 - 500)
Net Weight, lbs. (kg)	40	(18)
POWER / RATINGS (120 V, 60 Hz)		
Power (min-max) (Front-L)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Rear-L)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Center)	850 BTU/h (250 W) - 20000 BTU/h (5865 W)	
Power (min-max) (Front-R)	1000 BTU/h (295 W) - 4000 BTU/h (1175 W)	
Power (min-max) (Rear-R)	2200 BTU/h (645 W) - 12000 BTU/h (3520 W)	
TECHNICAL DETAILS		
Amperage Rating	0.1 A	
Maximum Power	52000 BTU/h (15295 W)	
Power Cable	3 Prong Nema 5 - 15P	
Power Cable Length, in. (mm)	51	(1300)
Electrical Circuit	120 V - 60 Hz - 15 A	
LP Kit Included	Yes	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French / Spanish	
WARRANTY		
Limited Warranty	Parts and Labor (2-year)	